

CONTENTS

NEW page 2

VALCO FITTINGS 6

CHEMINERT FITTINGS 56

LIQUID HANDLING 82

TUBING 86

VALVE SELECTION 94

**VALCO INJECTORS
and VALVES** 96

DIAPHRAGM VALVES 140

**CHEMINERT INJECTORS
and VALVES** 144

**ACTUATORS
and ACCESSORIES** 186

**FLOW, PRESSURE,
and ON/OFF CONTROLLERS** 212

INSTRUMENTATION 220


**CALIBRATION GAS STANDARDS
from VICI Metronics** 228

**GC CAPILLARY COLUMNS
from VICI Metronics** 234

**GAS PURIFICATION
from VICI Metronics** 246

**SYRINGES
from VICI Precision Sampling** 248

GENERAL REFERENCE 252



VALCO

40th

**ANNIVERSARY
1968 - 2008**

TO ORDER

**NORTH, SOUTH, AND CENTRAL
AMERICA (except Canada);
AUSTRALIA AND NEW ZEALAND**

VICI Valco Instruments Co. Inc.

Sales (713) 688-9345
(800) 367-8424 *
* USA and Canada only
Fax (713) 688-8106
Email sales_usa@vici.com

P.O. Box 55603
Houston, TX 77255
USA

**EUROPE, MIDDLE EAST, ASIA,
AND AFRICA**

VICI AG International

Sales + 41 41 925 6200
Fax + 41 41 925 6201
Email order@vici.ch

Parkstrasse 2
CH-6214 Schenkon
Switzerland

CANADA

VICI Valco Instruments Canada

Phone (866) 297-2626
(613) 342-2600
Fax: (613) 342-0111
Email canada@vici.com

26 Water Street East
Brockville, Ontario
Canada K6V 1A1

Welcome to VICI

VICI is an acronym for Valco Instruments Company Inc. VICI now defines multiple companies which manufacture various products for the analytical industry.

VICI Valco Instruments

For over 40 years, Valco Instruments has been the leading designer and manufacturer of standard and custom components for precision analytical, biomedical, and biocompatible instrumentation. In addition to Valco and Cheminert® valves and fittings, we offer a wide range of related products such as electric and pneumatic actuators, tubing and sampling loops, heated enclosures, valve sequence and temperature controllers, gas purifiers, GC detectors, and digital interfaces.



Fafnir, one of a long line of Valco Saint Bernards, at the Houston, Texas office



Our engineering development facility on Waterbury Drive in Houston

VICI AG International

VICI AG International, in Schenkon, Switzerland, is an independent site for the manufacturing of Valco and Cheminert valves and the handling of all VICI product lines in Europe, Africa, the Middle East, and the Far East. Present certification is ISO 9001:2000.

VICI Metronics

VICI Metronics, Inc. is the leading manufacturer of devices and instruments that are used in the generation of calibration gas standards. The line includes Dynacal and G-Cal permeation tubes, Dynacalibrator calibration gas generators, and gas monitors. Metronics is the leading provider of explosives, narcotics, and chemical



Our international facility in Schenkon, Switzerland



**VICI Metronics
Poulsbo, Washington**

warfare dopants for TSA airport security (ammonia, DCM), law enforcement, border patrol, military, and other trace detection industry professionals.

We offer high performance gas specific purifiers suitable for use in GC/MS and LC/MS systems. The helium, hydrogen, nitrogen, and air purifiers remove sulfur and nitrogen compounds, halocarbons, hydrocarbons, moisture, oxygen, and other contaminants.

The Metronics facility also houses production of and support for Valco-Bond and ValcoPLOT capillary columns.

VICI Precision Sampling

Your resource for syringes, Mininert® valves, probes, and tubing. Our pre-cut stainless steel tubing is available in standard lengths, or cut and bent to your specifications. All our syringes feature ultra smooth bores, easily replaceable parts, low dead volume, crisp clean gradations, and precision calibrations.

VICI Valco Canada

Products from all VICI companies are available in Canada directly from this location. We also supply and support our Canadian dealers and OEMs.



**VICI Precision Sampling
Baton Rouge, Louisiana**



**VICI Valco Canada
Brockville, Ontario**

CONTACT US

See box on facing page for:


**VICI Valco Instruments
VICI AG International
VICI Valco Canada**

VICI Precision Sampling

Tel (800) 828-1653 (225) 927-1128
Fax (225) 923-1331
Email presamp@vici.com
P.O. Box 15886
Baton Rouge, LA 70895

VICI Metronics

Tel (877) 737-1887 (360) 697-9199
Fax (360) 697-6682
Email metronics@vici.com
columns@vici.com
26295 Twelve Trees Lane
Poulsbo, WA 98370

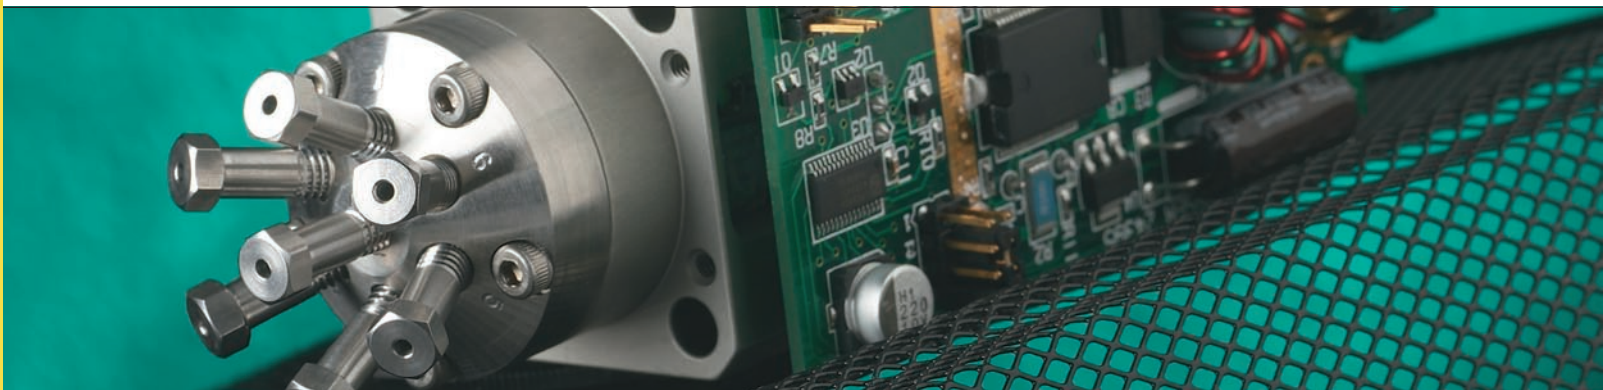

New from VICI

NEW

360 Micron Fittings pages 57-58

Our new high pressure fittings permit direct connection of 360 micron OD fused silica, PEEK, stainless, or electroformed nickel tubing without the use of liners. The ferrule snaps into the nut so that the fitting is “one-piece”, but the ferrule remains free to rotate as the nut is tightened so that the tube doesn’t twist. Because of the compact size and fine 2-56 threads, a leak-free connection that seals at pressures in excess of 20,000 psi can be easily formed with the available manual tool.




360 micron nanovolume fittings
page 57-58

NEW


Chem inert UHPLC Injectors and Selectors **Model C70 series**

- Nanovolume®**pages 152-153
- Microbore** 156-157
- Selectors** 170-171

The ideal injector for current analytical techniques requiring system pressures up to 20,000 psi, C70 series injectors come in 4, 6, 8, and 10 port versions, with bores as small as 100 µm (.004"). Selectors offer 4 to 10 positions. In addition to injectors incorporating our new 360 µm fittings, models are available for use with 1/16" or 1/32" tubing.

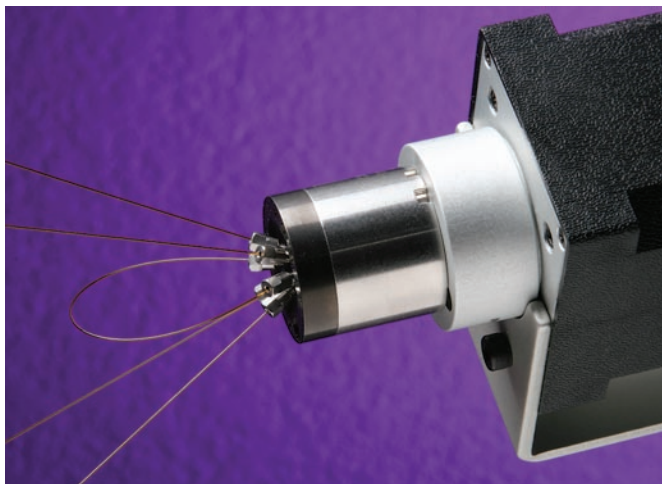

UHPLC injector with 360 micron nanovolume fittings
Model C72MU, page 152

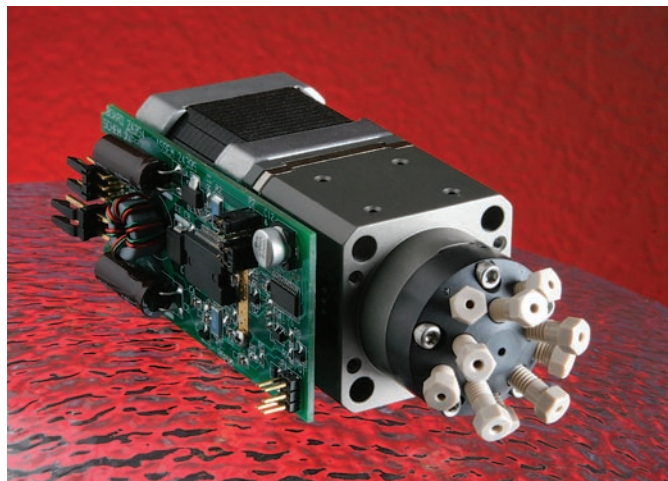

Microbore injector with integrated motor
Model C52, page 178

NEW

Cheminert Integrated Motor/Valves for HPLC

Model C50 Series

Microborepage 178
Analytical 180
Selectors 184

The Model C50 Series is an integrated motor/valve assembly designed specifically to be built into an OEM system. Using the well-proven Cheminert HPLC injector design and the 24 volt motor from our popular microelectric actuators, the compact, lightweight C50 needs only to be connected to the instrument's power supply. Injectors are available in 4, 6, 8, and 10 port configurations, and selectors are available with 4 to 10 positions. Stators are Nitronic 60 stainless steel or PAEK.



Low pressure stream selector with integrated motor
Model C65, page 185

NEW

Cheminert Integrated Motor/Valves for LC

Model C60 Series

10-32 PEEK fittingspage 182
1/4-28 colored fittings 183
Selectors 185

Valves in the Model C60 Series, designed for OEM systems, are conventional two position LC sample injector / switching valves or selectors integrated with a positioning motor.

Versions are available with zero dead volume fittings (10-32 thread) or with 1/4-28 tube end fittings. Standard specifications are 100 psi gas/250 psi liquid at 75°C.



Dual-layer PEEK tubing
page 89

NEW

Dual Layer PEEK® Tubing..... page 89

Our dual layer PEEK tubing eliminates any concern that a critical sample stream could be contaminated by pigments used to color code the tubing. It looks like any other color-coded tubing at first glance, but a closer look reveals that the pigmented layer surrounds a separate but integrally-bonded inner layer of natural PEEK. The tubing is available in a wide range of colors, striped or solid.

Fast GC Module

- Resistively-heated low mass column
- FID or Pulsed Discharge Detector
- Compact, efficient chromatography

The Problem

Much recent work has been devoted toward meeting the demand for fast, portable analysis of a wide variety of potential samples. This research has led many to the realization that efforts to miniaturize the classic gas chromatograph can only go so far before one winds up frustrated by the considerable bulk and power requirement of the oven and heating element. Recognizing this, Valco has accelerated the development of a system concept which is literally "outside the box."

Our Solution

The VICI Fast GC Module includes the three basic elements of a classic GC: (1) an inlet, (2) a column, and (3) a detector. Our system demonstrates that excellent chromatography can be accomplished using small, lightweight components to produce rapid, high-resolution analyses for virtually any application that demands quick answers from an easily portable instrument.

1. The inlet

The inlet consists of a heated injection port for syringe injection. An air actuated sample loop injector is optional.


2. The column

The column is resistively-heated by applying a low-voltage current to a nickel jacket or wrap surrounding the column, eliminating the need for a traditional GC column oven and heating element with their power and space requirements. Column temperature is controlled by regulating the amount of current, with a small fan for quickly cooling the low-mass column to near-ambient temperature.

3. The detector

Choose between an FID or a Model D-4 Pulsed Discharge Detector, which is universal, non-destructive, and highly sensitive. The D-4's response to both inorganic and organic compounds is linear over a wide range. Response to fixed gases is positive (increase in standing current), with an MDQ in the low ppb range.

**FOR MORE INFORMATION,
CONTACT OUR TECHNICAL DEPARTMENT.**

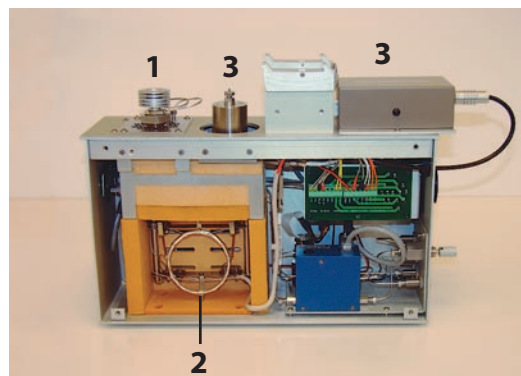

**Fast GC Module and controller mounted
on an autosampler**


Fast GC Module

CHEMICAL WEAPONS SURROGATES

Column: Ni-Carbowax
7 m x 0.25 mm
x 0.25 μ m,
Column temp: Resistively heated
from 70°C to 130°C
in 1 minute
Detector: VICI Micro-PDD
Detector temp: 150°C
Injector: Diaphragm valve
Sample: 100 μ l
Injector temp: 150°C

	ppm
1. Thioxane (1,4)	0.65
2. DIMP	0.6
3. DEMP	1.1
4. Dithiane (1,4)	1.0
5. TEPO	0.43


DIMP Diisopropylmethylphosphonate
DEMP Diethylmethylphosphonate
TEPO Triethylphosphonate

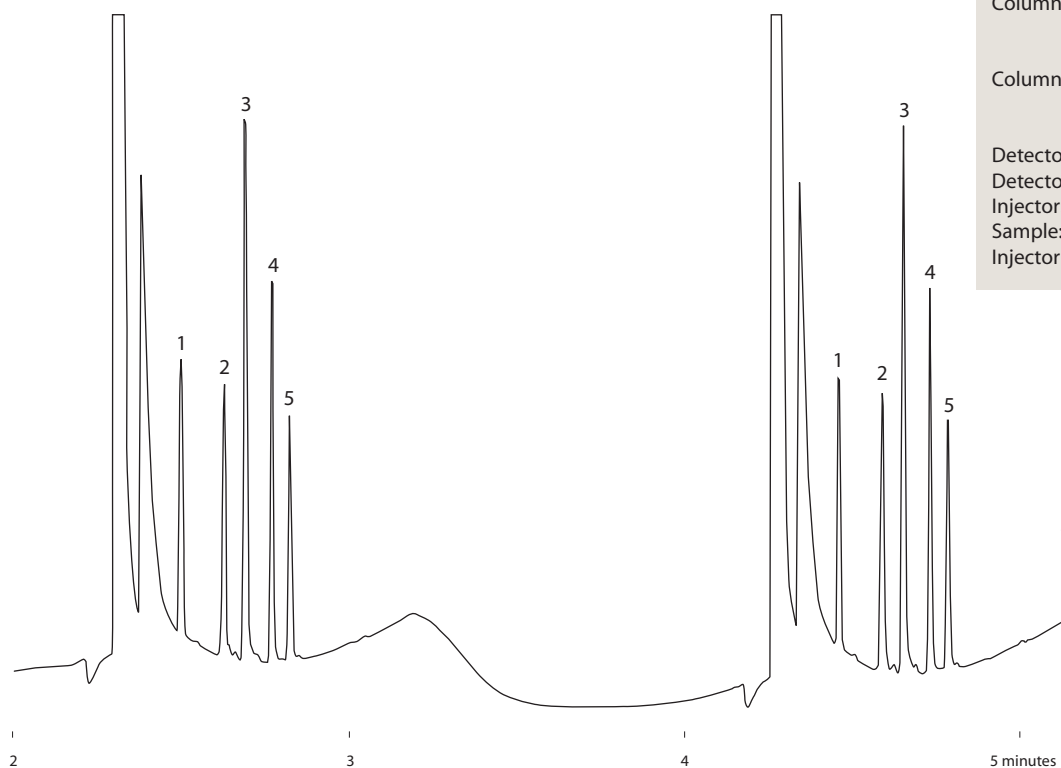

Fast GC Module

DIESEL ANALYSIS

Column: VB-5
5 m x 0.25 mm
x 0.20 μ m
Column temp: 70°C (5 sec) to 340°C
at 100°C/min,
(hold 20 sec)
Detector: FID
Detector temp: 350°C
Flow rate: 4.6 mL/min

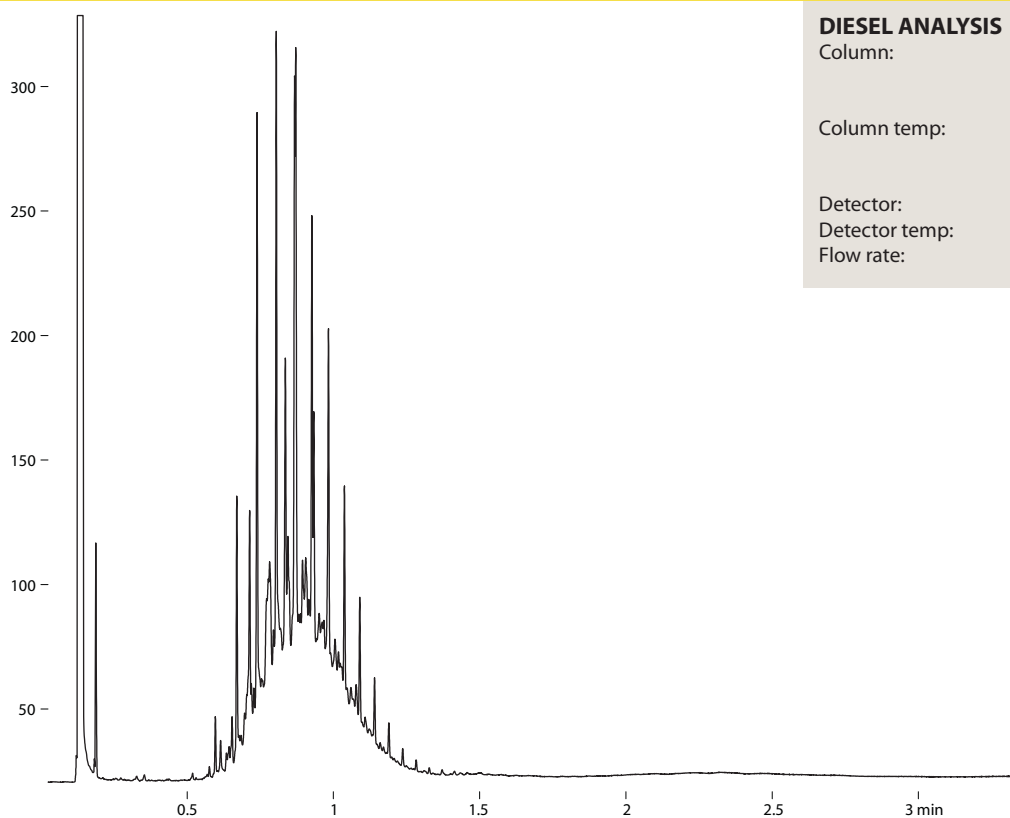



Valco Fittings

The two piece compression fitting (**Figure 1**), in which a ferrule is compressed onto the tube as a nut is tightened, offers reliability in high pressure situations and in connecting metal tubing. Valco excels in all critical areas of the design and manufacture of such fittings. Quality considerations, which cannot be ignored if an analytical system is to reach and maintain optimum performance levels, include interchangeability, counterbore tolerances, ID/OD concentricity, mixing potential, cleaning procedures, and the method employed to “make up” the ferrule on the tube.

No Tubing Deformation

The basic concept of compression fittings carries the inherent danger of tube deformation (**Figure 2**). While some manufacturers emphasize this positively as a method of ensuring that the tubing doesn’t blow out of the ferrule, the flow anomalies introduced by the restricted ID make these fittings a poor choice for many instrument applications.

Valco metal ferrules cut a ring near the end of the tube (**Figure 3**), which prevents tube release at high pressures without significantly deforming and restricting the tube interior. Because our ferrules have a sharp edge at the ID near the nose, this usually takes only about 1/4 turn beyond the point where the ferrule first starts to grab the tubing. There is so little tube distortion that they are routinely used with glass-lined tubing! Only Valco’s polymer fittings rely on friction to hold a tube.

CAUTION!

The analytical devices market has attracted numerous companies which copy Valco/Cheminert designs. Please exercise caution in the use of copies, which may not be compatible with the original versions in this catalog.

Because of VICI’s high volume production and dedicated machinery, our fittings are often less expensive and of consistently higher quality than competing copies.

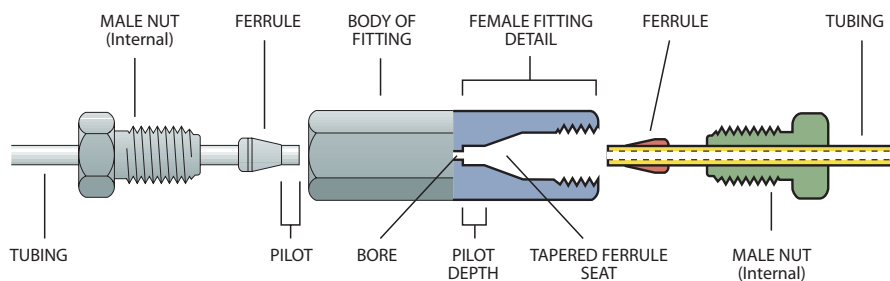


Figure 1
Valco compression fitting

TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards—OD tolerance should be nominal dimension $\pm .002$ ".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500

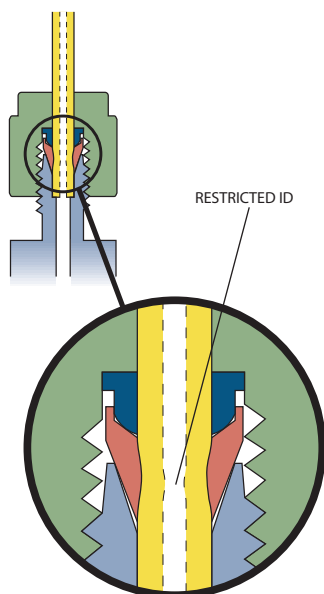


Figure 2
ID restriction
in common compression fitting

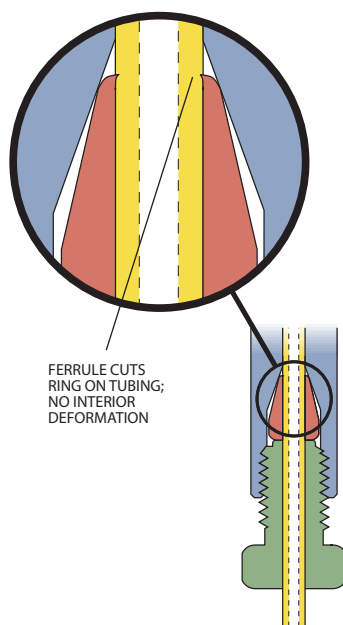


Figure 3
No ID restriction
in Valco compression fitting

Interchangeability

Valco fitting details are designed with a consistent pilot depth, permitting reliable interchangeability as connections are revised or fittings are replaced. This interchangeability extends throughout the Valco and Cheminert fitting and valve product lines. Indeed, the Valco standard has been so widely copied that Valco and Cheminert fittings are, in general, fully interchangeable with those of our major competitors. In initial installations, Valco ferrules will often improve other manufacturers' fitting connections.

Because of variations in tubing OD and in pilot and taper designs from manufacturer to manufacturer, the amount of tubing extending beyond the made up ferrule can vary. (The most radical variation is in the fittings manufactured by Waters. Based on the old Swagelok design, they have a pilot depth considerably longer than standard.) **Figure 4a** shows a properly made up fitting. If that same fitting is installed in a detail which was designed for a slightly longer tube extension (as in **Figure 4b**), dead volume will be introduced. In the opposite case, with the pilot shorter than the pilot depth (**Figure 4c**), the tube will bottom out before the ferrule has sealed. However, our tests prove that except in the most extreme cases, a Valco ferrule will "creep" on the tubing until it reaches the bottom of the ferrule taper, making a proper seal.

Reliably Clean

Most of our state of the art CNC machines use water-based lubricants. After each part comes off the machine, it is cleaned with water-soluble detergents and then rinsed in hot deionized water. Finally, every metal fitting that we make is given a thorough cleaning with steam from deionized water at 140°C. Any critical parts processed with oil-based lubricants are baked to remove all traces. The practical result of the extra effort is this: you don't have to be concerned about solvent residues.

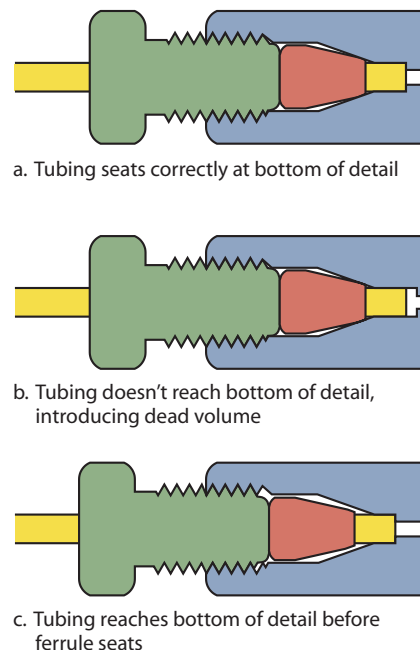


Figure 4

Introduction

Precision Machining, Finishing, and Tolerances

The machining methods used by different manufacturers to finish the detail of compression fittings vary in several ways that affect performance, as shown below. The fitting in **Figure 5** is the best choice for high performance fittings, as the tube fits squarely into the bottom of the detail. This is the detail used in Valco and Cheminert high pressure fittings.

Some fitting manufacturers omit a critical finishing operation which makes the bottom of the detail square, leaving the shape of the typical tapered drill bit instead. This results in the fitting shown in **Figure 6**, which introduces extra volume and mixing potential. VICI uses proprietary tooling specifically designed to produce the same high precision detail in every Valco and Cheminert fitting.

Although sometimes the tube end may seal in the bottom of the detail, the intent is for the seal to be made at the ferrule. This leaves the possibility of seepage up around the tube and into the minute cavities between the end of the ferrule and the bottom of the ferrule seat. The probability of this seepage increases when there is an excessive variance between the tubing OD and the diameter of the counterbored pilot in which it sits, and between the ferrule OD and the ferrule ID at the point where it "bites" or crimps the tubing. The possibility is virtually eliminated in VICI's fittings, which are manufactured with the precise dimensions that chromatographic applications demand. Use of VICI precut tubing, which is manufactured to quality standards in excess of most commercial tubing, further assures the best fitting connection.

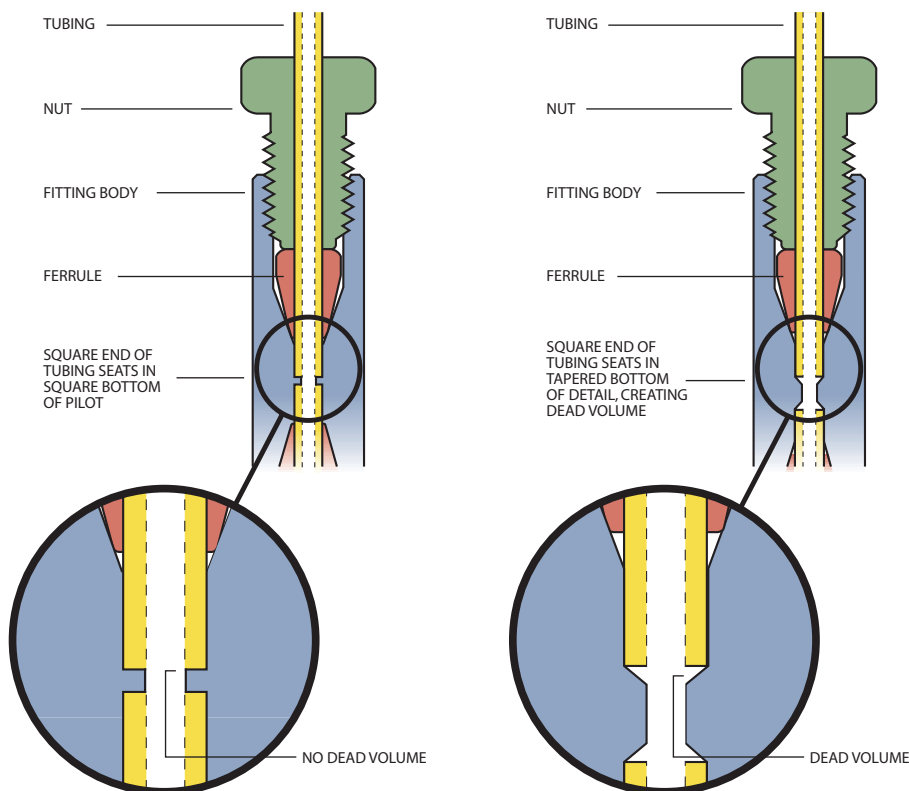


Figure 5
Valco/Cheminert high pressure
compression fitting

Figure 6
Poor quality
compression fitting

Comparison of Compression Fitting Designs

The potential for dead volume and mixing is a consideration in other aspects of fitting design as well, and varies considerably among manufacturers. For example, the common gas distribution reducing union in **Figure 7** illustrates two problems for instrumentation: a large connecting volume, and various steps and restrictions which cause mixing. While there are many uses for these fittings upstream of the analytical system (such as bulk gas distribution), they cause problems when used downstream in critical applications.

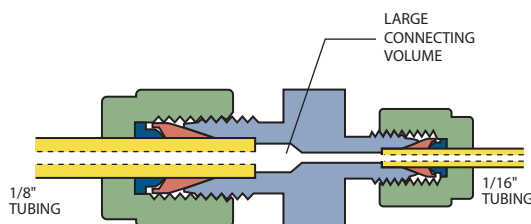


Figure 7
Common commercial
reducing union

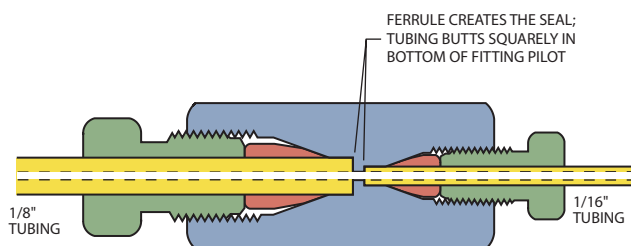


Figure 8
Valco zero dead volume
reducing union

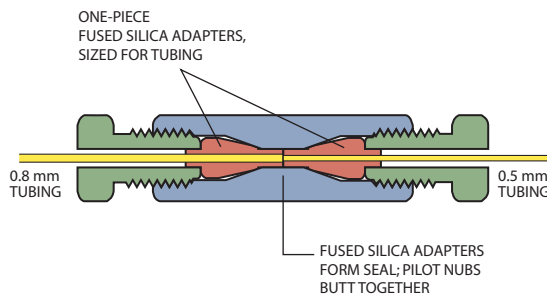


Figure 9
Valco zero dead volume
through-bore union

Additional difficulties may be encountered if this type of fitting is loosened and retightened repeatedly. The male threaded part can become flared to the point where it is impossible to get the nut on, and the tube end often flares out in the fitting detail so that it's difficult to remove the tube.

The Valco internal union (**Figure 8**) has a larger mass surrounding the ferrule, so that even with repeated remakes or overtightening, it's impossible to flare the fitting as in the external design. When a union is selected with a bore to match the ID of the connecting tubing, mixing and dead volume are virtually eliminated.

For connection of fused silica tubing of the same or differing sizes, the through-bore union shown in **Figure 9** is recommended. This fitting permits the use of our one-piece fused silica adapters to effect a true zero dead volume connection. The ferrule features an integrated pilot which adapts to the ID of the unions, resulting in an inert, zero volume connection.

Every Valco and Cheminert fitting is manufactured to exacting specifications. Fitting concentricity – the relationship of the center of one fitting to another – is held to within 10% of the bore size (0.05 mm in a typical 1/16" union with 0.5 mm bore), which is better than that of commonly used *tubing*. This results in fittings which contribute no "extra column effects" or loss of efficiency to the chromatographic system.

Nuts

Internal nuts – stainless steel

Nuts with product numbers starting with Z are for use with all standard Valco internal fittings and most valves. They may be used with fittings from other manufacturers as well. The L (long) and XL (extra-long) types are for situations where the fitting head may be otherwise inaccessible or where interference between fittings exists, as on many Valco multiposition valves. Standard material is 300 series stainless steel.



Stainless nuts			
Package of 10:	Length	Prod No	Price
1/32" nut	.30"	ZN.5-10	\$30.00
1/32" nut	.45"	LZN.5-10	35.00
1/16" nut	.43"	ZN1-10	17.00
1/16" nut	.50"	MZN1-10	25.00
1/16" nut	.75"	LZN1-10	27.50
1/16" nut	1.00"	XLZN1-10	30.00
1/8" nut	.57"	ZN2-10	21.00
1/8" nut	.82"	LZN2-10	27.50
1/8" nut	1.07"	XLZN2-10	32.50
1/4" nut	.70"	ZN4-10	25.00
1/4" nut	1.11"	LZN4-10	40.00



NEW Specialty nuts – stainless steel

These special purpose nuts facilitate a tight bend as the tube exits the fitting, and can also help prevent kinks in very thin wall tubing. Quick bend nuts are available in standard length (.43") and in a short version (.30") for certain custom applications. Note that the short version (ZSN1) can *only* be used in certain applications. Call for more information.

Stainless nuts			
Description	Length	Prod No	Price
1/16", standard	.43"	ZN1Q	\$3.25
1/16", short	.30"	ZSN1	4.00

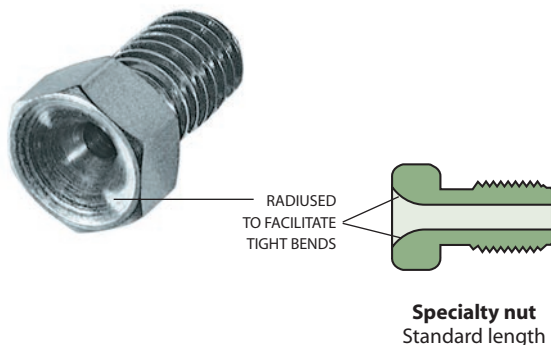

MORE INFORMATION

- PEEK nuts page 63
- HPLC column end fittings 43-46
- Reducing unions
 - Internal 29
 - External 30
 - External/internal 31
 - Internal/external 31
- Unions
 - Internal 26
 - External 27
 - External/internal 27

TECH TIP

Fittings for **360 micron** tubing are available on pages 57-58.

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm



External nuts – stainless steel

External nuts are used with external fittings, such as our column end fittings (ECEP series) and external unions (EZU and EZRU series). They may also be used with Valco ferrules on Parker CPI and Swagelok type fittings. Standard material is 300 series stainless.

* PTFE-coated threads standard.

Description	Stainless nuts	
	Prod No	Price
1/32" external nut	EN.5	\$4.75
1/32" external nut, knurled	EN.5KN	4.50
1/16" external nut	EN1	2.50
1/8" external nut	EN2	2.50
1/4" external nut	EN4 *	2.50
3/8" external nut	EN6 *	4.00
1/2" external nut	EN8 *	6.00
1" external nut	EN1K *	14.00



Plugs – stainless steel and high pressure

Stainless plugs consist of a zero volume nut with a ferrule made up on a solid rod. For high pressure applications such as UHPLC, SFE, and SFC (>7000 psi), we recommend the special high pressure plugs with the ferrule and rod machined as a single, solid piece.

Description	Length of nut*	Stainless plugs		High pressure Stainless plugs	
		Prod No	Price	Prod No	Price
1/32"	.30"	ZP.5	\$8	ZP.5H	\$12
1/16"	.43"	ZP1	6	ZP1H	9
1/16"	.75"	LZP1	7	LZP1H	10
1/8"	.57"	ZP2	6	ZP2H	9
1/8"	.82"	LZP2	7	LZP2H	10
1/4"	.70"	ZP4	8	-	-



Caps – stainless steel

A cap is essentially a piece of hex stock with a zero volume fitting detail machined into it, but with no through-hole.

Description	Length of nut*	Stainless caps	
		Prod No	Price
1/32"	.30"	ZC.5	\$10
1/16"	.43"	ZC1	9
1/8"	.57"	ZC2	9
1/4"	.70"	ZC4	12

MORE INFORMATION

- PEEK plugs . . . pages 64, 71
- PEEK plugs for high pressure Cheminert valves 64
- PEEK caps 57, 64

Ferrules

Valco metal ferrules cut a ring near the end of the tube, preventing tube release at high pressures without significantly deforming and restricting the tube interior. (However, if the hardness of the tubing is equal to or greater than that of the ferrule, deformation of the tube rather than a cut ring is likely.) Make up usually takes only about a 1/4 turn beyond the point where the ferrule first starts to grab the tubing. Polymeric ferrules seal by the increased friction from compression.

Valco zero volume ferrules may be used with all Valco fittings and with those of most other manufacturers. The maximum pressure limit is generally determined by the yield strength of the tubing. The maximum pressure for softer materials (such as brass and polymers) is lower, and depends on the tubing used. If in doubt about a particular combination, consult our technical staff.

For trace gas analysis, use gold-plated ferrules to achieve sealing with $<10^{-9}$ cc/atm/sec leakage.



MORE INFORMATION

For more detailed information on metals, refer to the discussion on pages 254-255.

Metal ferrules

	Prod No	Price	Prod No	Price	Prod No	Price
Package of 10:	Stainless, Type 303		Stainless, Type 316		Stainless, Gold-plated	
1/32"	ZF.5-10	\$30	ZF.5S6-10	\$40	ZF.5GP-10	\$42
1/16"	ZF1-10	20	ZF1S6-10	30	ZF1GP-10	35
1/8"	ZF2-10	18	ZF2S6-10	22	ZF2GP-10	30
1/4"	-	-	ZF4S6-10	19	ZF4GP-10	30
Sold individually:	Hastelloy C		Nickel		Titanium	
1/32"	ZF.5HC	\$9	ZF.5NI	\$9	ZF.5TI	\$10
1/16"	ZF1HC	8	ZF1NI	8	ZF1TI	9
1/8"	ZF2HC	8	ZF2NI	8	ZF2TI	9
1/4"	ZF4HC	9	ZF4NI	9	ZF4TI	9
Package of 10:	Brass					
1/32"	ZF.5B-10	\$18				
1/16"	ZF1B-10	13				
1/8"	ZF2B-10	15				
1/4"	ZF4B-10	17				

- Not available

Larger sizes and/or specific materials may be available on special order.

METALS AT A GLANCE

Hastelloy C® HC
Resistant to pitting;
Resists oxidizing atmospheres

Nickel NI
Resistant to caustics,
high temp halogens,
and hydrogen halides

Stainless steel,
Gold-plated GP
More inert than standard stainless

Stainless steel,
Type 303
GC, gas lines, general purpose

Stainless steel,
Type 316 S6
LC with high chloride ion in solutions

Titanium TI
Outstanding resistance to most media except hydrofluoric acids

Brass B
Not recommended for most chromatographic applications

0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"

1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"

4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"

7.0 mm = .275"
10.0 mm = .400"
27.0 mm = 1.08"

1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm

1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm



Polymeric ferrules

MORE INFORMATION

PEEK ferrules page 63
Grooved PEEK ferrules 63

For more detailed information on polymers, refer to the discussion on page 256.

POLYMERS AT A GLANCE

CTFE KF
*Resists all inorganic corrosives.
Produced as Kel-F®*

FEP FEP
Chemical resistance equals PTFE, but lower creep and higher friction

PTFE, Glass-filled TFG
Inert, mechanically stable

PTFE, Virgin TF
*Inert; very soft, easily cold flows.
Produced as Teflon®*

Polyimide, Graphite GV
Soft, easy to form ferrules


Polyimide, Valcon V
High temp, graphite reinforced

Polyimide, Virgin V1
High temp, electrical insulator

	Prod No	Price	Prod No	Price	Prod No	Price	
Package of 10:	PTFE, Virgin		PTFE, Glass-filled		FEP		
	1/32"	ZF5TF-10	\$30	ZF5TFG-10	\$30	ZF5FEP-10	\$30
	1/16"	ZF1TF-10	18	ZF1TFG-10	18	ZF1FEP-10	18
	1/8"	ZF2TF-10	23	ZF2TFG-10	23	ZF2FEP-10	23
	1/4"	ZF4TF-10	23	ZF4TFG-10	23	ZF4FEP-10	23
	3/8"	ZF6TF-10	30	ZF6TFG-10	30	ZF6FEP-10	30
	1/2"	ZF8TF-10	45	ZF8TFG-10	45	ZF8FEP-10	45
	Package of 10:	PFA		CTFE			
		1/32"	ZF5PFA-10	\$40	ZF5KF-10	\$40	
		1/16"	ZF1PFA-10	34	ZF1KF-10	34	
1/8"		ZF2PFA-10	34	ZF2KF-10	34		
1/4"		ZF4PFA-10	34	ZF4KF-10	34		
3/8"		ZF6PFA-10	50	ZF6KF-10	50		
1/2"	ZF8PFA-10	70	ZF8KF-10	70			
Package of 5:	Polyimide, Graphite		Polyimide, Valcon		Polyimide, Virgin		
	1/32"	ZF5GV-5	\$35	ZF5V-5	\$30	ZF5V1-5	\$68
	1/16"	ZF1GV-5	23	ZF1V-5	25	ZF1V1-5	65
	1/8"	ZF2GV-5	35	ZF2V-5	35	ZF2V1-5	90
	1/4"	ZF4GV-5	45	ZF4V-5	45	ZF4V1-5	120
	3/8"	ZF6GV-5	65	ZF6V-5	65	ZF6V1-5	140
	1/2"	ZF8GV-5	110	ZF8V-5	110	ZF8V1-5	160

FERRULE IDENTIFICATION

To differentiate among the most commonly ordered metal ferrules, ring(s) are engraved on the non-sealing surfaces.



Reducing Ferrules

Reducing ferrules provide an inexpensive way to connect small temporary transfer lines to valves or fittings designed for larger tubing. For long term use, we recommend our reducing unions, internal reducers (IZRs), or external reducers (EZR), as appropriate.

Internal ZDV (zero dead volume) reducing ferrules are designed for use with all standard Valco internal style fittings – that is, those with a male nut and female fitting detail. The ferrule features an integral pilot which fills the pilot cavity (the space between the end of the ferrule and the bottom of the detail), yielding a zero dead volume fitting.

External ZDV reducing ferrules are designed for use with all standard external style fittings – that is, those with a female nut and a male fitting detail. This ferrule has a slightly longer pilot than the internal version, to accommodate the longer external detail. The result is a zero dead volume fitting. A single groove indicates that the ferrule has the longer pilot and is for use in an external detail.

Standard reducing ferrules can be used where mixing is not a problem, such as with liquid or gas delivery. A 1/16" to 1/32" ferrule of this style is simply a 1/16" ferrule with a 1/32" hole.



Internal reducing ferrules

Use these ferrules in internal type fitting details, with nuts that have external threads.

	Prod No	Price	Prod No	Price	Prod No	Price
<i>Package of 5:</i>	PTFE, Glass-filled		PEEK		Polyimide, Valcon	
1/16" to 1/32"	ZRF1.5TFG-5	\$23	ZRF1.5PK-5	\$23	ZRF1.5V-5	\$35
1/8" to 1/32"	ZRF2.5TFG-5	23	ZRF2.5PK-5	23	ZRF2.5V-5	35
1/8" to 1/16"	ZRF21TFG-5	23	ZRF21PK-5	23	ZRF21V-5	35
1/4" to 1/16"	ZRF41TFG-5	29	ZRF41PK-5	35	ZRF41V-5	52
1/4" to 1/8"	ZRF42TFG-5	29	ZRF42PK-5	35	ZRF42V-5	52
<i>Package of 5:</i>	CTFE		Polyimide, Virgin			
1/16" to 1/32"	ZRF1.5KF-5	\$23	ZRF1.5V1-5	\$70		
1/8" to 1/32"	ZRF2.5KF-5	23	ZRF2.5V1-5	75		
1/8" to 1/16"	ZRF21KF-5	23	ZRF21V1-5	80		
1/4" to 1/16"	ZRF41KF-5	35	ZRF41V1-5	90		
1/4" to 1/8"	ZRF42KF-5	35	ZRF42V1-5	90		



MORE INFORMATION
 Internal reducers (IZR)..... page 34
 External reducers (EZR) 35
 Ferrule removal kits.... 16

For 1/16" and 1/32" reducing ferrules with smaller ODs for use with fused silica, see the FS and FSR adapters on pages 16-17.

TECH TIP
 Fittings for **360 micron** tubing are available on pages 57-58.

TECH TIP
 If you are doing resistive heating of traps or columns, note that our virgin polyimide reducing ferrules are effective electrical insulators.

Virgin polyimide is produced as Vespel®.



Internal reducing ferrule (ZRF)



PEEK reducing ferrule and internal nut
 (Order nut separately.)


OPTION

Available in Virgin Polyimide.

External reducing ferrules

Use these ferrules in external type fitting details, with nuts that have internal threads.

	Prod No	Price	Prod No	Price	Prod No	Price
<i>Package of 5:</i>	PTFE, Glass-filled		PEEK		Polyimide, Valcon	
1/16" to 1/32"	EZRF1.5TFG-5	\$23	EZRF1.5PK-5	\$23	EZRF1.5V-5	\$35
1/8" to 1/32"	EZRF2.5TFG-5	23	EZRF2.5PK-5	23	EZRF2.5V-5	35
1/8" to 1/16"	EZRF21TFG-5	23	EZRF21PK-5	23	EZRF21V-5	35
1/4" to 1/16"	EZRF41TFG-5	29	EZRF41PK-5	35	EZRF41V-5	52
1/4" to 1/8"	EZRF42TFG-5	29	EZRF42PK-5	35	EZRF42V-5	52
<i>Package of 5:</i>	CTFE					
1/16" to 1/32"	EZRF1.5KF-5	\$23				
1/8" to 1/32"	EZRF2.5KF-5	23				
1/8" to 1/16"	EZRF21KF-5	23				
1/4" to 1/16"	EZRF41KF-5	35				
1/4" to 1/8"	EZRF42KF-5	35				

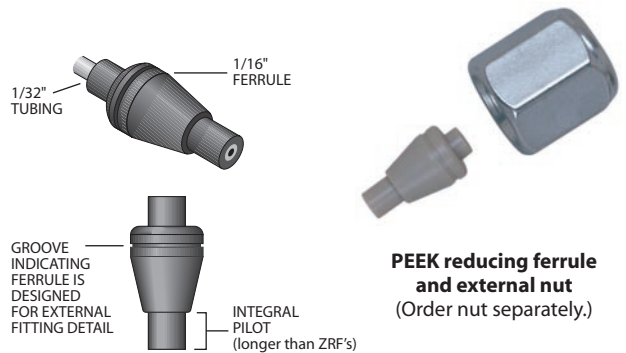


External reducing ferrule (EZRF)

PEEK reducing ferrule and external nut
(Order nut separately.)

Standard reducing ferrules

Use these ferrules for bulk distribution only, since the resulting connection will not be zero dead volume. These ferrules can be used in either internal or external type fitting details.

	Prod No	Price	Prod No	Price	Prod No	Price
<i>Package of 5:</i>	PTFE, Glass-filled		PEEK		Polyimide, Valcon	
1/16" to 1/32"	RF1.5TFG-5	\$17	RF1.5PK-5	\$17	RF1.5V-5	\$29
1/8" to 1/32"	RF2.5TFG-5	17	RF2.5PK-5	17	RF2.5V-5	29
1/8" to 1/16"	RF21TFG-5	17	RF21PK-5	17	RF21V-5	30
1/4" to 1/16"	RF41TFG-5	23	RF41PK-5	23	RF41V-5	40
1/4" to 1/8"	RF42TFG-5	23	RF42PK-5	23	RF42V-5	40
<i>Package of 5:</i>	CTFE					
1/16" to 1/32"	RF1.5KF-5	\$17				
1/8" to 1/32"	RF2.5KF-5	17				
1/8" to 1/16"	RF21KF-5	17				
1/4" to 1/16"	RF41KF-5	23				
1/4" to 1/8"	RF42KF-5	23				



Standard reducing ferrule (RF)

- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

Fused Silica Adapters

Fused silica adapters are available in Valcon polyimide for use up to 350°C and in PEEK for lower temperature applications (up to 175°C). Valcon polyimide is a unique graphite-reinforced composite, specially prepared to maximize mechanical stability at high temperatures. Small blocks are subjected to extreme loads by a process known as hot isostatic pressing, with individual ferrules

subsequently machined from these blocks. The result of this two-step process is a fused silica adapter with high temperature stability which far exceeds that of parts produced by conventional molding. Note that the determining factor in adapter size selection is the fused silica tubing's outer diameter, or OD. Typical ODs for common columns are included in the product number tables.



One piece fused silica adapter (FS)

The one piece FS adapter, essentially a reducing ferrule, is recommended for use in fittings where the polyimide ferrule will not be removed. Connections are made and disconnected by loosening the fitting nut and sliding the tube out.

Package of 5:

1/32" Adapters

Tubing OD:

< 0.25 mm	FS.25-5	\$30	FS.25PK-5	\$30	FS.25V1-5	\$75
0.25 ≤ 0.40 mm	FS.4-5	30	FS.4PK-5	30	FS.4V1-5	75
0.40 ≤ 0.50 mm	FS.5-5	30	FS.5PK-5	30	FS.5V1-5	75
0.50 ≤ 0.80 mm	ZF.5V-5	30	ZF.5PK-5	21	ZF.5V1-5	58

1/16" Adapters

Tubing OD:

< 0.25 mm	FS1.2-5	30	FS1.2PK-5	30	FS1.2V1-5	75
0.25 ≤ 0.30 mm	FS1.25-5	30	FS1.25PK-5	30	FS1.25V1-5	75
0.30 ≤ 0.35 mm	FS1.3-5	30	FS1.3PK-5	30	FS1.3V1-5	75
0.35 ≤ 0.40 mm	FS1.4-5	30	FS1.4PK-5	30	FS1.4V1-5	75
0.40 ≤ 0.50 mm	FS1.5-5	30	FS1.5PK-5	30	FS1.5V1-5	75
0.50 ≤ 0.80 mm	FS1.8-5	30	FS1.8PK-5	30	FS1.8V1-5	75
0.80 ≤ 0.90 mm	FS1.9-5	30	FS1.9PK-5	30	FS1.9V1-5	75
0.90 ≤ 1.0 mm	FS11.0-5	30	FS11.0PK-5	30	FS11.0V1-5	75



Ferrule removal kit

These tapered tools have teeth designed to grip and remove fused silica adapters if they get stuck in a fitting detail. Each kit has two sizes of tools, so they can retrieve 1/32" and 1/16" adapters.

Prod No	Price
FRK1	\$23



TEMPERATURE RATINGS

Polyimide adapters can be used at temperatures up to 350°C.

PEEK adapters are not recommended for use above 175°C.

TECH TIP

Virgin polyimide adapters are effective electrical insulators, making them the ideal choice for capillary electrophoresis.

Virgin polyimide is produced as Vespel®.


TECH TIP

If a fused silica tube breaks off in a through-type union, remove the nuts and the tube opposite the broken one. Clear the fitting by passing a drill or wire of the appropriate diameter into the unbroken side and through the center of the fitting.

Our **ferrule removal kit**, left, can be used to remove ferrules from all types of fittings.

WHICH ADAPTER FOR WHICH COLUMN?

Column ID	Typical column OD	1/32" adapter	1/16" adapter
< 0.20 mm	0.25 mm	FS.25	FS1.25
0.25 mm	0.4 mm	FS.4	FS1.4
0.32 mm	0.5 mm	FS.5	FS1.5
0.53 mm	0.8 mm	ZF.5V	FS1.8



Removable fused silica adapters (FSR)

The FSR adapter is the only adapter recommended for use in valves. It consists of a liner which slides over the fused silica tubing and a ferrule which makes up on the liner. The polyimide liner has an enlarged diameter at one end which is captured by the nut, so the liner and the tube within it are removed as the nut is unscrewed from the valve. The 1/16" FSR adapter includes a special counter-bored 1/16" nut. The 1/32" FSR adapter uses standard Valco 1/32" nuts.

MORE INFORMATION

Fused silica
 Unions . . . pp 18-19, 58, 61
 Fittings 18-21
 A pin vise and drill index are useful for enlarging the inner diameters of the FS adapters.
 Pin vise and drill index 55

REPLACEMENT PARTS

Ferrules	<i>(package of 5)</i>	
1/32" Polyimide	ZF.5V-5	\$30
1/16" Polyimide	ZF1V-5	25
	<i>(package of 10)</i>	
1/16" PEEK	ZF1PK-10	33
Nuts	<i>(package of 10)</i>	
1/32" SS	ZN.5-10	29
<i>Special nuts for FSRs:</i>		
1/16" SS	ZCN1-10	30
1/16" SS long	LZCN1-10	45

Package of 5:

Polyimide, Valcon
 Prod No Price

1/32"

Removable adapters	Tubing OD:		
	< 0.25 mm	FSR.25-5	\$75
	0.30 ≤ 0.35 mm	FSR.3-5	75
	0.35 ≤ 0.40 mm	FSR.4-5	75
	0.40 ≤ 0.50 mm	FSR.5-5	75

1/32"

Replacement liners	Tubing OD:		
	< 0.25 mm	FSL.25-5	50
	0.25 ≤ 0.40 mm	FSL.4-5	50
	0.40 ≤ 0.50 mm	FSL.5-5	50

Package of 5:

Polyimide, Valcon **PEEK**
 Prod No Price Prod No Price


1/16"

Removable adapters	Tubing OD:					
	< 0.15 mm	-	-	FS1R.15PK-5	\$85	
	< 0.20 mm	FS1R.2-5	\$85	FS1R.2PK-5	85	
	0.20 ≤ 0.40 mm	FS1R.4-5	85	FS1R.4PK-5	85	
		0.40 ≤ 0.50 mm	FS1R.5-5	85	FS1R.5PK-5	85
		0.50 ≤ 0.80 mm	FS1R.8-5	85	FS1R.8PK-5	85
	0.90 ≤ 1.0 mm	FS1R1.0-5	85	FS1R1.0PK-5	85	

1/16"

Replacement liners	Tubing OD:					
	< 0.15 mm	-	-	FS1L.15PK-5	50	
	< 0.20 mm	FS1L.2-5	50	FS1L.2PK-5	50	
	0.20 ≤ 0.40 mm	FS1L.4-5	50	FS1L.4PK-5	50	
		0.40 ≤ 0.50 mm	FS1L.5-5	50	FS1L.5PK-5	50
		0.50 ≤ 0.80 mm	FS1L.8-5	50	FS1L.8PK-5	50
	0.90 ≤ 1.0 mm	FS1L1.0-5	50	FS1L1.0PK-5	50	

100 µm	= .004"
150 µm	= .006"
0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm

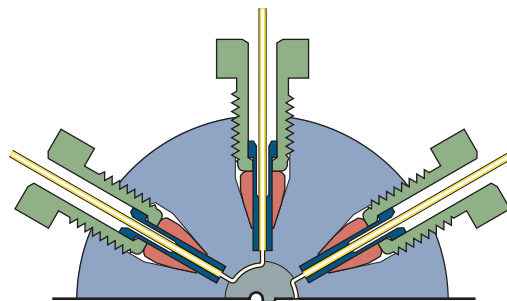

Removable FSR adapters in a valve

Fused Silica Fittings

The patented design of our fused silica fittings ensures stable, leak-free connections at temperatures up to 400°C, and undistorted ferrules that are easily removed and reused. Columns may be changed without the risk of the leaks which can devastate systems such as mass spectrometers or atomic emission detectors. This is accomplished with a spring-loaded

self-compensating nut which provides a constant sealing force as the temperature varies.

Self-compensating nuts are currently employed in two basic designs: a fused silica-lined union and an injector/detector nut for Agilent 6890 and 5890 GCs.


Fused silica unions

The fused silica union* has a quartz liner, providing an inert connection zone of minimal volume. Since the seal occurs only at the ferrule tip, the total sealing force is minimized, leaving the ferrule undistorted and reusable.

Note: The ferrules used in this union are unique, due to the seal at the tip. Standard ferrules will not work in this union.



Description	Prod No	Price
Fused silica union	FSKZU1	\$92.50
Replacement liner	FSQ1	35.00
Replacement nut	FSZN1	23.00

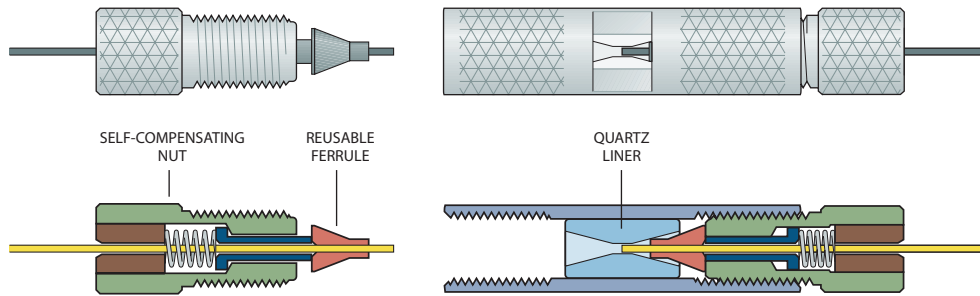

Fused silica union with self-compensating nut

Replacement ferrules for fused silica unions and self-compensating nuts (Agilent injector nuts)

These reusable ferrules seal at the tip, and are different from standard ferrules. Order for use with FSKZU1 fused silica unions and FSZNA-HP nuts on these two pages.

Package of 10:	Column ID:	Prod No	Price
	.20-.25 mm	FS1.35-R10	\$57.50
	.32 mm	FS1.45-R10	57.50
	.53 mm	FS1.75-R10	57.50

100 µm	= .004"
150 µm	= .006"
0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm

*U.S. patent numbers 5,234,235 and 4,991,883.


Injector nut for Agilent 6890 and 5890, Series I and II



This self-compensating nut is a direct replacement for the standard nut on the split/splitless injectors of Agilent 6890 and 5890 series GCs. This retrofit offers enhanced ferrule reusability and temperature stability, resulting in fingertight leak-free connections over the full programmed temperature range of mass spectrometry and gas chromatography. To use this nut, the split/splitless disk must also be upgraded; the new disk will also work with older HP nuts and ferrules.

	<i>Prod No</i>	<i>Price</i>
Injector nut system Includes nut and seal disk	FSZA-HP	\$62.50

Replacement parts		
Self-compensating nut	FSZNA-HP	40.00
HP-5890 split/splitless seal disk	SEAL1-HP	30.00

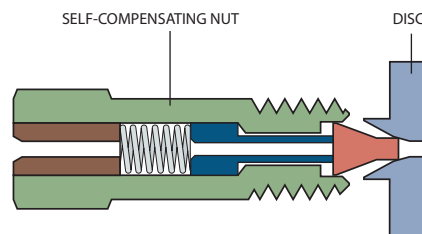


Self-compensating nut
for the 6890/5890 GC

1/32" Ultra low mass external unions



The 1/32" external union is specially designed for use with capillary columns in GC. It has very low mass and does not require wrenches to seal. Use only with one-piece fused silica adapters, since metal ferrules will distort the detail. Order fused silica adapters separately (*see box at left*).

<i>Bore</i>	<i>Prod No</i>	<i>Price</i>
0.25 mm	EU.5	\$24.00
0.50 mm	EU.5L	24.00
1/32"	EU.5T	24.00



1/32" external union
for use with capillary columns in GC

MORE INFORMATION

1/32" fused silica adapter ferrules..... page 16

1/32" FUSED SILICA FERRULES
(package of 5)

Tubing OD:

≤ 0.25 mm	FS.25-5	\$25
0.25 mm ≤ 0.4 mm	FS.4-5	25
0.4 mm ≤ 0.5 mm	FS.5-5	25
0.5 mm ≤ 0.8 mm	ZF.5V-5	25


Fused Silica Adapters

Fused silica make-up adapters

The fused silica make-up adapter connects a fused silica capillary column to a valve or detector while adding a make-up gas. In the reverse mode it works like a splitter, without the uneven or erratic split seen with basic tees. Two lengths are available. Order 1/32" fused silica adapter ferrules separately (see box on facing page).



Description	Length	Bore	Prod No	Price
1/16" to 1/32"	1.5"	0.5 mm	FSMUAS1.5M	\$105.00
	1.5"	0.75 mm	FSMUAS1.5	92.50
	1.5"	1.0 mm	FSMUAS1.5L	92.50
	3.5"	0.75 mm	FSMUA1.5	92.50

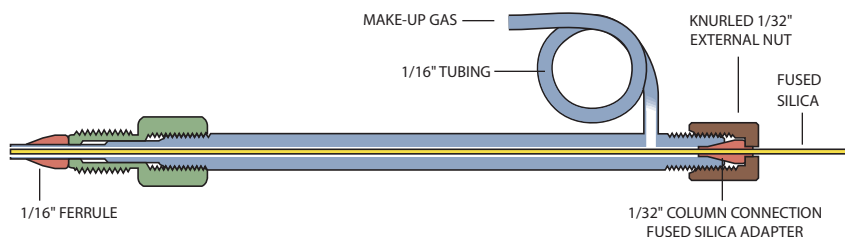

Fused silica make-up adapter
(FSMUA1.5)

100 µm	= .004"
150 µm	= .006"
0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm


Fused Silica Adapters



Internal to external reducer/adapters

Internal fittings provide the smallest possible fitting volume. But there are situations, such as when you're using graphite ferrules which tend to become lodged in internal details, when an external fitting might be more desirable. A typical situation of that nature is the connection of a fused silica capillary to a valve. Our unique design permits the 1/32" nut to be tightened without affecting the 1/16" connection. Order 1/32" fused silica adapter ferrules separately (see box below).

Description	Bore	Prod No	Price
1/16" to 1/32"	0.25 mm	IZERA1.5C	\$52.50
	0.5 mm	IZERA1.5M	46.00
	1.0 mm	IZERA1.5	44.00

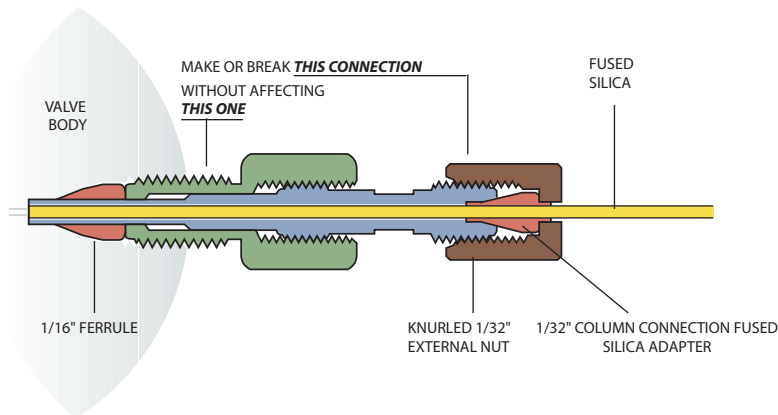

Internal to external FS adapter (IZERA1.5)
shown installed in a valve

MORE INFORMATION

1/32" fused silica adapter ferrules..... page 16

CAUTION

Polymeric ferrules are strongly recommended for 1/16" and 1/32" external details. Metal ferrules may distort the fitting.

1/32" FUSED SILICA FERRULES
(package of 5)

Tubing OD:

≤ 0.25 mm	FS.25-5	\$30
0.25 mm ≤ 0.4 mm	FS.4-5	30
0.4 mm ≤ 0.5 mm	FS.5-5	30
0.5 mm ≤ 0.8 mm	ZF.5V-5	30

Microvolume Connectors


Micro-unions, -tees, -crosses, and -Y's have a unique two-piece design which allows us to provide an extremely small bore in a conventional ferrule and nut fitting. The actual connection area is separated from the nut threads, with the ferrule detail in a metal or polymer insert and the threads machined into a stainless steel or polymer ring. Since the insert has a much smaller diameter than a standard one-piece fitting, it can be drilled with much shorter tools; and, since a shorter drill has less tendency to wander or break, holes as small as .006" (0.15 mm) can be machined with the same high degree of concentricity found in all Valco fittings.

Valco microvolume fittings make it possible to couple 100 micron ID capillary GC, HPLC, or CZE columns without special nuts and ferrules. A stainless ring with one of the plastic


inserts provides electrical insulation within the insert, while the PEEK ring achieves total isolation.

The ring containing the threads is made from PEEK or stainless steel. Inserts are made of stainless steel, Hastelloy C, Titanium, PEEK, or CTFE. PEEK rings are not as robust as stainless steel, and are not usable above 75°C. The stainless steel ring with a metal insert can operate at up to 10,000 psi for HPLC or SFC.

All standard Valco zero dead volume reducing ferrules (ZRF, FS, and FSR) will work in these fittings. They are uniquely designed to fill the void between the fitting pilot and the smaller tubing OD, eliminating any dead volume in the fitting. (Reducing ferrules such as Valco's RF series should be avoided, since they leave dead volume.)

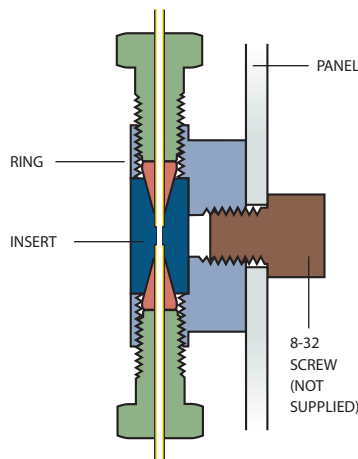

Panel mounting

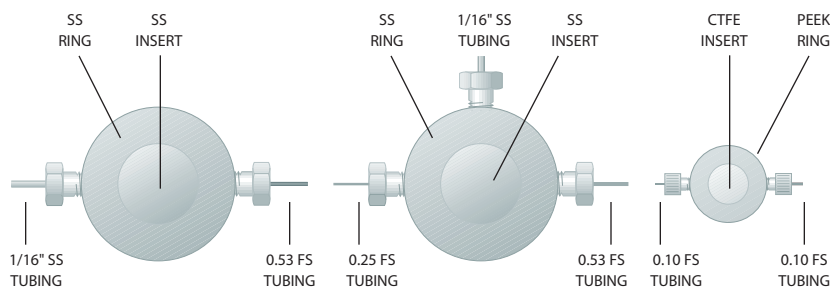

Stainless to fused silica union
1/16" fittings

Make-up adapter
1/16" fittings

CZE union
1/32" fittings

MORE INFORMATION

FS fused silica adapters.....	page 16
FSR fused silica adapters.....	17
ZRF internal reducing ferrules	14
Ferrules	
Metal.....	12
Polymeric	13

100 µm	=	.004"
150 µm	=	.006"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

Microvolume Connectors

1/32" Microvolume connectors

Includes ring, nuts, and ferrules. With metal inserts: ferrules are the same material as the insert, and ring and nuts are stainless steel. With polymer inserts: ferrules are the same material as the insert, and ring and nuts are PEEK.

Insert Material:	Stainless steel		Hastelloy C		Titanium		PEEK		CTFE	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
0.15 mm bore										
Union	MU.5XCS6	\$55	MU.5XCHC	\$78	MU.5XCTI	\$85	MU.5XCPK	\$48	MU.5XCKF	\$48
Tee	MT.5XCS6	68	MT.5XCHC	90	MT.5XCTI	95	MT.5XCPK	60	MT.5XCKF	60
Y	MY.5XCS6	68	MY.5XCHC	90	MY.5XCTI	95	MY.5XCPK	60	MY.5XCKF	60
Cross	MX.5XCS6	78	MX.5XCHC	105	MX.5XCTI	110	MX.5XCPK	75	MX.5XCKF	75
0.25 mm bore										
Union	MU.5CS6	43	MU.5CHC	67	MU.5CTI	73	MU.5CPK	43	MU.5CKF	43
Tee	MT.5CS6	48	MT.5CHC	73	MT.5CTI	85	MT.5CPK	48	MT.5CKF	48
Y	MY.5CS6	48	MY.5CHC	73	MY.5CTI	85	MY.5CPK	50	MY.5CKF	50
Cross	MX.5CS6	68	MX.5CHC	85	MX.5CTI	90	MX.5CPK	65	MX.5CKF	65

1/16" Microvolume connectors

Includes ring, nuts, and ferrules. With metal inserts: ferrules are the same material as the insert, and ring and nuts are stainless steel. With polymer inserts: ferrules are the same material as the insert, and ring and nuts are PEEK.

Insert Material:	Stainless steel		Hastelloy C		Titanium		PEEK		CTFE	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
0.15 mm bore										
Union	MU1XCS6	\$48	MU1XCHC	\$72	MU1XCTI	\$78	MU1XCPK	\$43	MU1XCKF	\$43
Tee	MT1XCS6	60	MT1XCHC	85	MT1XCTI	90	MT1XCPK	55	MT1XCKF	55
Y	MY1XCS6	60	MY1XCHC	85	MY1XCTI	90	MY1XCPK	55	MY1XCKF	55
Cross	MX1XCS6	73	MX1XCHC	100	MX1XCTI	105	MX1XCPK	68	MX1XCKF	68
0.25 mm bore										
Union	MU1CS6	37	MU1CHC	61	MU1CTI	68	MU1CPK	37	MU1CKF	37
Tee	MT1CS6	43	MT1CHC	67	MT1CTI	73	MT1CPK	43	MT1CKF	43
Y	MY1CS6	43	MY1CHC	68	MY1CTI	73	MY1CPK	43	MY1CKF	43
Cross	MX1CS6	60	MX1CHC	80	MX1CTI	85	MX1CPK	60	MX1CKF	60

Replacement components

Description	1/32" connectors		1/16" connectors	
	Prod No	Price	Prod No	Price
SS ring for union, tee, or cross	MRX.5S6	\$17.00	MRX1S6	\$17.00
SS ring for Y	MRY.5S6	17.00	MRY1S6	17.00
PEEK ring for union, tee, or cross	MRX.5PK	17.00	MRX1PK	17.00
PEEK ring for Y	MRY.5PK	17.00	MRY1PK	17.00
Nuts for SS ring	ZN.5	3.00	ZN1	1.70
Nuts for PEEK ring	ZN.5FPK	3.25	ZN1FPK	3.25

Inserts for any connector:

To order an insert, add an "I" after the "M" in the product number, and deduct \$5 from the connector price.

For example, to order an insert for a 1/16" microvolume union MU1CS6, order part number MIU1CS6.

OPTIONS

0.50, 0.75, and 1.0 mm bores are available in most materials and configurations.

NANOVOLUME CONNECTIONS

For 0.10 mm (100 µm) bore fittings, see pages 57- 60.

Unions

Unions join two pieces of tubing of the same OD. Select the union with the bore that matches the ID of the tubing. If the IDs are different, choose the union with a bore which matches the smaller tube bore. Standard material is 300 series stainless steel.

- **Internal** unions have female threads and a fitting detail for zero volume fittings. The nuts have male (external) threads.
- **External** unions have male threads, requiring a nut with internal threads.
- **External/internal** unions have male threads on one end and female threads on the other, for connecting a standard zero dead volume fitting to an existing tube which already has an external nut made up on it.

Internal fittings are almost always the best with tubing of 1/8" OD or smaller. They make a stronger connection and offer the lower volume necessary for high performance instrumentation. Also, because 1/16" external fittings have very thin, easily distorted walls, they are not as durable as 1/16" internal fittings. In sizes larger than 1/8", external fittings are generally easier to make up because of less thread friction.

Bulkhead versions can be mounted through an instrument panel or on a bracket. The fitting body is undercut so that it bites into the panel when the mounting nut is tightened, eliminating the need for a lock washer. An O-ring can be installed between the body and the panel to allow operation in purged environments. Typically the mounting nut goes inside the instrument, so that the long threaded portion will be out of sight. In the external/internal bulkhead unions, the mounting nut is on the side with the Valco internal fitting.




TECH TIP

Filtering capability can be added to a union by inserting a screen or frit into it before making up the fittings. However, when a fitting detail has a screen or frit in it, the pilot depth is reduced, so that the ferrule makes up closer to the tube end than it otherwise would. If that tube is used in any other Valco fitting, it will introduce unswept volume. Our filter design takes this into account, allowing our fittings to remain truly interchangeable.

Filters pages 50-52

Frits and screens 53

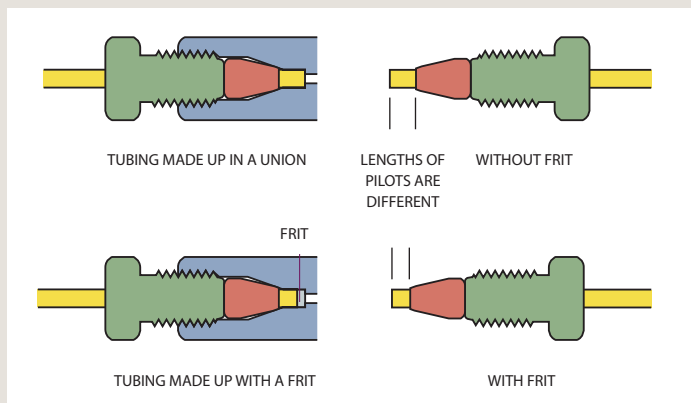


0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

Zero Volume vs. Zero Dead Volume

A true zero volume fitting is one in which no part of the fitting actually becomes a part of the flow path. The only Valco fittings which fit this description are our through-bore unions, which allow tubing to butt end-to-end. (So these are only zero volume if the tube ends are perfectly square.)

All other fittings are designed with zero *dead* volume: that is, there is no volume introduced by the fitting which is not cleanly swept.

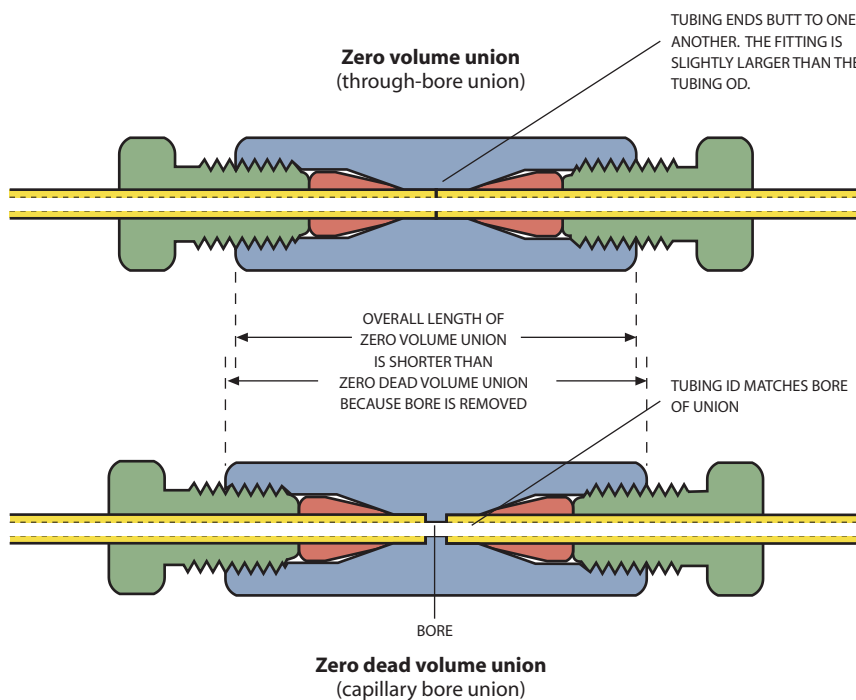

MORE INFORMATION

Reducing unions to connect two tubes with different ODs. p 29-31
Unions with 1/4-28 fittings 72

TECH TIP

Through-bore Union Installation

Because the tubing will pass all the way through a through-bore union, we suggest making up the first tube in a standard Valco fitting to establish the proper length of tubing extending beyond the ferrule. Install this made-up connection in the through-bore union; then the second tube can be butted against it for a zero volume connection.


Unions

Internal unions – stainless steel

Standard material is 300 series stainless. Also available in Hastelloy C, gold-plated stainless, and titanium.

Standard internal unions

Tubing			
OD	Bore	Prod No	Price
1/32"	0.15 mm	ZU.5XC	\$32
	0.25 mm	ZU.5	26
	0.50 mm	ZU.5L	23
	1/32"	ZU.5T	26
1/16"	0.15 mm	ZU1XC	32
	0.25 mm	ZU1C	22
	0.50 mm	ZU1M	20
	0.75 mm	ZU1	17
	1.0 mm	ZU1L	17
	1/16"	ZU1T	17
1/8"	0.75 mm	ZU2	15
	2.0 mm	ZU2L	15
	1/8"	ZU2T	15
1/4"	0.75 mm	ZU4	16
	4.6 mm	ZU4L	16
	1/4"	ZU4T	16

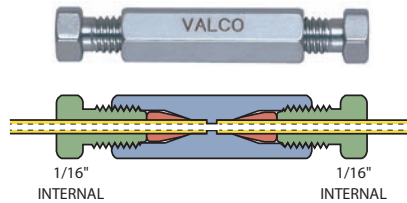

Internal union – metal
Standard bore version (ZU1)

Ends of tubing seat squarely at bottoms of fitting details

Bulkhead internal unions

Tubing				Bulkhead panel hole diameter
OD	Bore	Prod No	Price	
1/32"	0.15 mm	ZBU.5XC	\$38	5/16"
	0.25 mm	ZBU.5	32	5/16"
	0.50 mm	ZBU.5L	32	5/16"
	1/32"	ZBU.5T	32	5/16"
1/16"	0.15 mm	ZBU1XC	38	5/16"
	0.25 mm	ZBU1C	28	5/16"
	0.50 mm	ZBU1M	25	5/16"
	0.75 mm	ZBU1	23	5/16"
	1.0 mm	ZBU1L	23	5/16"
	1/16"	ZBU1T	23	5/16"
1/8"	0.75 mm	ZBU2	21	7/16"
	2.0 mm	ZBU2L	21	7/16"
	1/8"	ZBU2T	21	7/16"
1/4"	0.75 mm	ZBU4	22	5/8"
	4.6 mm	ZBU4L	22	5/8"
	1/4"	ZBU4T	22	5/8"



Bulkhead internal union – metal
(ZBU1)

MORE INFORMATION


Internal unions, high pressure PEEK . . . p 57, 65

For special materials and/or smaller bores:

Microvolume connectors offer a complete range of 1/32" and 1/16" unions in various metals and polymers, with bore sizes ranging from .006" (0.15 mm) to .040" (1.0 mm). Refer to pages 22-23.

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

5/16"	=	.312"	=	7.9 mm
3/8"	=	.375"	=	9.5 mm
7/16"	=	.437"	=	11.1 mm

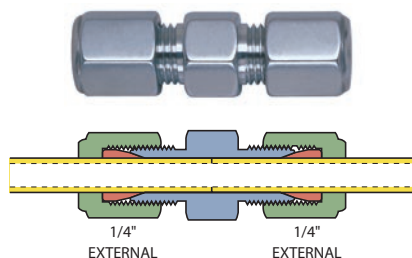


1/4" EXTERNAL 1/4" EXTERNAL


External union
Through-bore version (EU4T)
Ends of tubing butt together



Bulkhead external union
(EBU2L)



1/32" external union
(EU.5)
For use with GC capillary columns

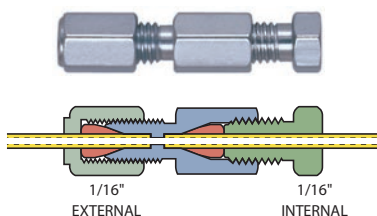

External/internal union
Standard bore (EZU1)
Adapts existing external fittings to Valco zero volume internal fittings



Bulkhead external/internal union
(EZBU1)

External unions

Standard material is 300 series stainless. Also available in Hastelloy C and gold-plated stainless.

Note: Because 1/16" external fittings have very thin, easily distorted walls, they are not as durable as 1/16" internal fittings. We recommend the use of external/internal unions (below) when connecting to an installed external nut.

Tubing OD	Bore	Standard		Bulkhead		Bulkhead panel hole diameter	
		Prod No	Price	Prod No	Price		
1/16"	See note above						
1/8"	1.0 mm	EU2	\$15	-	-	-	
	2.0 mm	EU2L	15	EBU2L	\$21	5/16"	
	1/8"	EU2T	15	EBU2T	21	5/16"	
1/4"	2.0 mm	EU4	18	EBU4	24	7/16"	
	4.6 mm	EU4L	18	EBU4L	24	7/16"	
	1/4"		EU4T	18	EBU4T	24	7/16"

External unions – 1/32" ultra low mass

The 1/32" external union is specially designed for use with capillary columns in GC. It is very low mass and does not require wrenches to seal. Use *only* with one-piece fused silica adapters, since metal ferrules will distort the detail. Order fused silica adapters separately (page 16). Standard material is 300 series stainless.

Bore	Prod No	Price
0.25 mm	EU.5	\$24
0.50 mm	EU.5L	24
1/32"	EU.5T	24

External/internal unions

Standard material is 300 series stainless. Also available in Hastelloy C and gold-plated stainless.

Tubing OD	Bore	Standard		Bulkhead		Bulkhead panel hole diameter
		Prod No	Price	Prod No	Price	
1/32"	0.25 mm	EZU.5	\$30	-	-	-
	0.50 mm	EZU.5L	30	-	-	-
1/16"	0.25 mm	EZU1C	28	EZBU1C	\$33	5/16"
	0.50 mm	EZU1M	28	EZBU1M	33	5/16"
	0.75 mm	EZU1	21	EZBU1	26	5/16"
	1/16"	EZU1T	21	EZBU1T	26	5/16"
1/8"	1.0 mm	EZU2	16	EZBU2	22	7/16"
	2.0 mm	EZU2L	16	EZBU2L	22	7/16"
	1/8"	EZU2T	16	EZBU2T	22	7/16"

Reducing Unions

Reducing unions join two tubes of different outside diameters. Standard material is 300 series stainless.

- Internal reducing unions have female threads and a fitting detail for zero volume fittings. The nuts have male (external) threads.
- External reducing unions have male threads, requiring a nut with internal threads.
- External/internal and internal/external reducing unions have male threads on one end and female threads on the other. We recommend the use of external/internal fittings when connecting to an existing external nut.

Internal fittings are almost always the best with tubing of 1/8" OD or smaller. They make a stronger connection and offer the lower volume necessary for high performance instrumentation. Also, because 1/16" external fittings have very thin, easily distorted walls,


they are not as durable as 1/16" internal fittings. In sizes larger than 1/8", external fittings are generally easier to make up because of less thread friction.

Bulkhead versions can be mounted through an instrument panel or on a bracket. The fitting body is undercut so that it bites into the panel when the mounting nut is tightened, eliminating the need for a lock washer. An O-ring can be installed between the body and the panel to allow operation in purged environments. Typically the mounting nut goes inside the instrument, so that the long threaded portion will be out of sight. In the external/internal bulkhead unions, the mounting nut is on the side with the Valco internal fitting.




DEAD VOLUME


"Dead volume" is created in obvious situations such as the one shown.

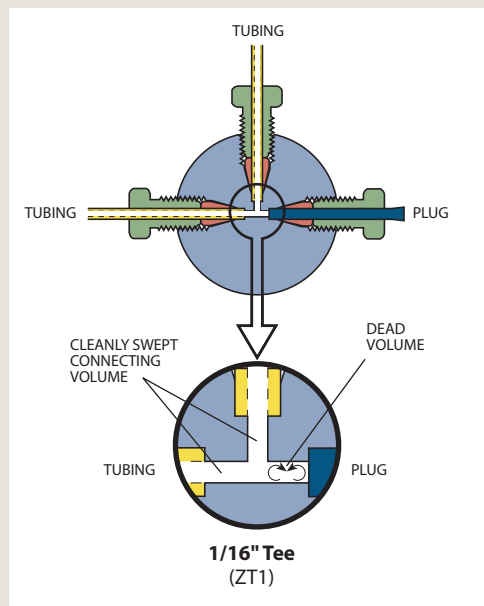

UNSWEPT VOLUME

Even in connections which are by most definitions "zero dead volume", unswept volume may be created where large ID transitions occur. The amount of mixing depends on the amount of mismatch in the IDs.

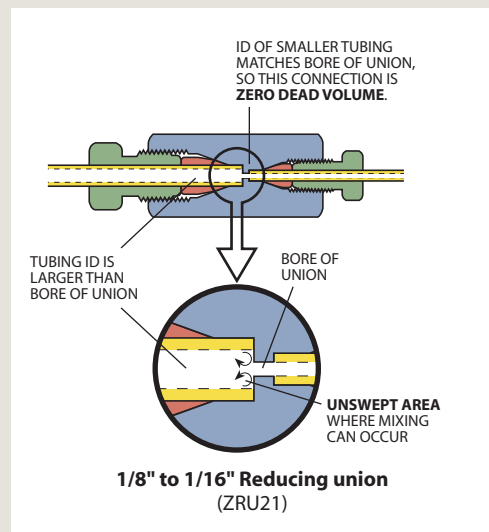

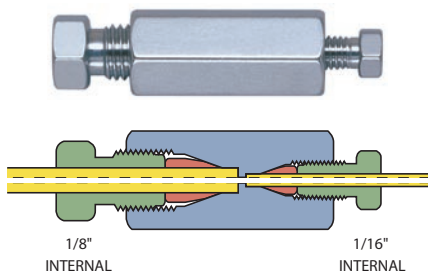

Internal reducing union – metal
Standard bore
(ZRU21)

Internal reducing unions – stainless steel

These unions connect two sizes of tubing, using zero dead volume internal fittings on each end. In the bulkhead version, the bulkhead nut is on the side with smaller tubing.

Standard material is 300 series stainless. Also available in Hastelloy C, gold-plated stainless, and titanium.

Standard internal reducing unions

Tubing OD	Bore	Prod No	Price
1/16" to 1/32"	0.15 mm	ZRU1.5XC	\$38
	0.25 mm	ZRU1.5	26
	0.50 mm	ZRU1.5L	26
	1/32"	ZRU1.5T	26
1/8" to 1/32"	0.25 mm	ZRU2.5	29
	0.50 mm	ZRU2.5L	29
	1/32"	ZRU2.5T	29
1/8" to 1/16"	0.25 mm	ZRU21C	22
	0.75 mm	ZRU21	16
	1/16"	ZRU21T	16
1/4" to 1/16"	0.25 mm	ZRU41C	22
	0.75 mm	ZRU41	17
	1/16"	ZRU41T	17
1/4" to 1/8"	0.75 mm	ZRU42	17
	2.0 mm	ZRU42L	17
	1/8"	ZRU42T	17

Bulkhead internal reducing unions

Tubing OD	Bore	Prod No	Price	Bulkhead panel hole diameter
1/16" to 1/32"	0.25 mm	ZBRU1.5	\$32	5/16"
	0.50 mm	ZBRU1.5L	32	5/16"
	1/32"	ZBRU1.5T	32	5/16"
1/8" to 1/32"	0.25 mm	ZBRU2.5	35	5/16"
	0.50 mm	ZBRU2.5L	35	5/16"
	1/32"	ZBRU2.5T	35	5/16"
1/8" to 1/16"	0.25 mm	ZBRU21C	28	5/16"
	0.75 mm	ZBRU21	22	5/16"
	1/16"	ZBRU21T	22	5/16"
1/4" to 1/16"	0.25 mm	ZBRU41C	28	7/16"
	0.75 mm	ZBRU41	23	7/16"
	1/16"	ZBRU41T	23	7/16"
1/4" to 1/8"	0.75 mm	ZBRU42	23	7/16"
	2.0 mm	ZBRU42L	23	7/16"
	1/8"	ZBRU42T	23	7/16"



Bulkhead internal reducing union – metal
(ZBRU21)

MORE INFORMATION

- Internal reducing unions, high pressure PEEK page 65
- External/internal reducing unions 31
- Internal/external reducing unions 31
- Standard unions 26
- Unions with 1/4-28 fittings 72

0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm


Reducing Unions

External reducing unions

These unions connect two sizes of tubing, using external fittings on each end. Standard material is 300 series stainless. Custom bulkhead versions are available in OEM quantities.

Standard external reducing unions


Tubing OD	Bore	Prod No	Price
1/8" to 1/16"	0.75 mm	ERU21	\$21
	1.00 mm	ERU21L	21
	1/16"	ERU21T	21
1/4" to 1/16"	0.75 mm	ERU41	23
	1/16"	ERU41T	23
1/4" to 1/8"	1.0 mm	ERU42	24
	2.0 mm	ERU42L	24
	1/8"	ERU42T	23

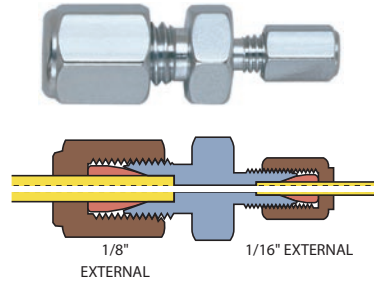

External reducing union
Standard bore
(ERU21)

Bulkhead external reducing unions

Tubing OD	Bore	Prod No	Price	Bulkhead panel hole diameter
1/8" to 1/16"	1.0 mm	EBRU12L	\$26	5/16"
	1/16"	EBRU12T	26	5/16"
1/4" to 1/16"	1.0 mm	EBRU14L	29	7/16"
	1/16"	EBRU14T	29	7/16"
1/4" to 1/8"	2.0 mm	EBRU24L	31	7/16"



Bulkhead external reducing union
(EBRU12L)

TECH TIP

Note: Because 1/16" external fittings have very thin, easily distorted walls, they are not as durable as 1/16" internal fittings. We recommend the use of 1/16" internal fittings when possible.

0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"

1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"

4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"


7.0 mm = .275"
10.0 mm = .400"

27.0 mm = 1.08"

1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm

1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm

5/16" = .312" = 7.9 mm
3/8" = .375" = 9.5 mm
7/16" = .437" = 11.1 mm

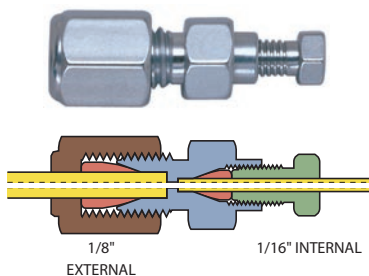

External/internal reducing union
Standard bore
(EZRU21)



Bulkhead external/internal reducing union
(EZBRU21)


External/internal reducing unions

In these reducing unions, the larger size tubing is made up with an external fitting and the smaller size tubing is made up with an internal fitting. In the bulkhead version, the bulkhead nut is on the side with the internal fitting. Other configurations, such as an external nut on the locking nut side, are available on special request.

Standard material is 300 series stainless. Also available in Hastelloy C, gold-plated stainless, and titanium.

Tubing OD	Bore	Standard		Bulkhead		Bulkhead panel hole diameter
		Prod No	Price	Prod No	Price	
1/16" to 1/32"	0.25 mm	EZRU1.5	\$35	-	-	-
	0.50 mm	EZRU1.5L	35	EZBRU1.5L	\$40	5/16"
	1/32"	EZRU1.5T	35	EZBRU1.5T	40	5/16"
1/8" to 1/32"	0.25 mm	EZRU2.5	35	-	-	-
	0.50 mm	EZRU2.5L	35	EZBRU2.5L	40	5/16"
	1/32"	EZRU2.5T	35	EZBRU2.5T	40	5/16"
1/8" to 1/16"	0.25 mm	EZRU21C	26	-	-	-
	0.75 mm	EZRU21	20	EZBRU21	25	5/16"
	1/16"	EZRU21T	20	EZBRU21T	25	5/16"
1/4" to 1/16"	0.25 mm	EZRU41C	28	-	-	-
	0.75 mm	EZRU41	21	EZBRU41	26	7/16"
	1/16"	EZRU41T	21	EZBRU41T	26	7/16"
1/4" to 1/8"	1.0 mm	EZRU42	22	EZBRU42	28	7/16"
	2.0 mm	EZRU42L	22	EZBRU42L	28	7/16"
	1/8"	EZRU42T	22	EZBRU42T	28	7/16"

Internal/external reducing unions

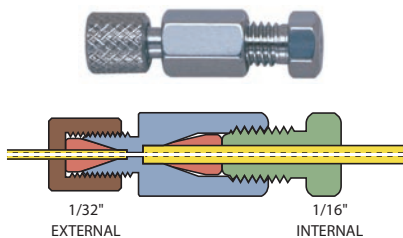

Internal/external reducing union
Standard bore
(EZRU.51)



Bulkhead internal/external reducing union
(EZBRU.51)

These reducing unions are the opposite of the ones above. The larger size tubing is made up with an internal fitting and the smaller size tubing is made up with an external fitting. In the bulkhead version, the bulkhead nut is on the side with the internal fitting. Standard material is 300 series stainless.

Internal/external reducing unions are typically used to connect 1/16" stainless steel tubing to fused silica tubing.

Only polymeric ferrules should be used with 1/32" external details – metal ferrules will distort them. These unions include a stainless steel ferrule for the 1/16" SS tube, but because of the variety of fused silica ODs and corresponding ferrules, a 1/32" fused silica adapter must be ordered separately. (See page 16.)

Tubing OD	Bore	Standard		Bulkhead		Bulkhead panel hole diameter
		Prod No	Price	Prod No	Price	
1/16" to 1/32"	0.25 mm	EZRU.51	\$29	EZBRU.51	\$35	5/16"
	0.50 mm	EZRU.51L	29	EZBRU.51L	35	5/16"
	1/32"	EZRU.51T	29	EZBRU.51T	35	5/16"

MORE INFORMATION

- Fused silica adapters . . . page 16-17
- Polymeric ferrules 13
- External unions 27
- Internal reducing unions 29
- Internal unions 26

Tees and Crosses

Tees

Tees connect three lines. Standard material is 300 series stainless. Also available in Hastelloy C, gold plated stainless, and titanium.

Tubing OD	Bore	Prod No	Price
1/32"	0.25 mm	ZT.5	\$35
	0.50 mm	ZT.5L	35
1/16"	0.25 mm	ZT1C	32
	0.50 mm	ZT1M	28
1/8"	0.75 mm	ZT1	23
	1.00 mm	ZT1L	23
1/4"	0.75 mm	ZT2	24
	2.00 mm	ZT2L	24
1/2"	1.00 mm	ZT4	28
	4.60 mm	ZT4L	28



MORE INFORMATION
 PEEK tees . . . pages 57, 64
 PEEK crosses 57, 64

Crosses

Crosses connect four lines. Standard material is 300 series stainless. Also available in Hastelloy C, gold plated stainless, and titanium.

Tubing OD	Bore	Prod No	Price
1/32"	0.25 mm	ZX.5	\$46
	0.50 mm	ZX.5L	46
1/16"	0.25 mm	ZX1C	46
	0.50 mm	ZX1M	40
	0.75 mm	ZX1	35
	1.00 mm	ZX1L	35
1/8"	0.75 mm	ZX2	37
	2.00 mm	ZX2L	37
1/4"	1.00 mm	ZX4	40
	4.60 mm	ZX4L	40



SPECIAL METALS AND/OR SMALLER BORES

See microvolume connectors: 1/32" and 1/16" tees, crosses, Y's, and unions in various metals and polymers, with smaller bores.

Microvolume connectors pp 22-23
 High pressure PEEK connectors . . 63-66
 Nanovolume connectors 57-61

TECH TIP

To join tubes of different ODs, use the fitting sized for the largest tube along with IZR reducers for the smaller tubes.

IZR reducer page 34

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

1/16" Manifolds

1/16" manifolds connect 4 - 16 inlet lines to a single outlet, and are often used to connect the outlets from several columns to a single detector. The unique angled entry of our design reduces dispersion to a minimum. Available with 1.00 mm inlet/outlet bore. Standard materials are PEEK or 300 series stainless.



	<i>Inlet bore</i>	<i>Outlet bore</i>	<i>Material</i>	<i>Prod No</i>	<i>Price</i>
4 inlets	0.25 mm	0.75 mm	Stainless steel	Z4M1	\$87
	0.25 mm	0.75 mm	PEEK	Z4M1PK	115
6 inlets	0.25 mm	0.75 mm	Stainless steel	Z6M1	115
	0.25 mm	0.75 mm	PEEK	Z6M1PK	145
8 inlets	0.25 mm	0.75 mm	Stainless steel	Z8M1	145
	0.25 mm	0.75 mm	PEEK	Z8M1PK	175
10 inlets	0.25 mm	0.75 mm	Stainless steel	Z10M1	175
	0.25 mm	0.75 mm	PEEK	Z10M1PK	200
12 inlets	0.25 mm	0.75 mm	Stainless steel	Z12M1	200
	0.25 mm	0.75 mm	PEEK	Z12M1PK	230
14 inlets	0.25 mm	0.75 mm	Stainless steel	Z14M1	230
	0.25 mm	0.75 mm	PEEK	Z14M1PK	260
16 inlets	0.40 mm	0.75 mm	PEEK	Z16M1PK	290

1/8" Manifolds

1/8" manifolds connect 4 - 12 inlet lines to a single outlet, and are typically used in a gas distribution system to minimize the number of fitting connections. A manifold pipe fitting version is also available. (See page 37.) Standard material is 300 series stainless steel.

	<i>Inlet bore</i>	<i>Outlet bore</i>	<i>Prod No</i>	<i>Price</i>
4 inlets	2.00 mm	2.00 mm	Z4M2	\$115
6 inlets	2.00 mm	2.00 mm	Z6M2	145
8 inlets	2.00 mm	2.00 mm	Z8M2	175
10 inlets	2.00 mm	2.00 mm	Z10M2	200
12 inlets	2.00 mm	2.00 mm	Z12M2	230



TECH TIP

A manifold used with an SD flowpath multiposition valve allows HPLC column selection with a single valve. See page 139 for an illustration.

SD UW valves. . . . pg 132

Internal Reducers

NEW Internal reducers

for 360 µm tubing

Directly connect 360 µm tubing into a 1/32" Valco valve or fitting detail, providing a positive leak-free seal with zero dead volume. The same patented design as our larger internal reducers (below). Both versions have a stainless steel body.

Tubing OD	Nut/ferrule material	Prod No	Price
1/32" to 360 µm	Stainless	C360IZR.5S6	\$34
	PEEK	C360IZR.5S6PKG	34

Internal reducers


Valco's patented internal reducer (IZR) allows smaller tubing to be used in valves with fitting details for larger tubing, forming a positive leak-free seal with zero dead volume. The small line from your system goes directly into the IZR and the sample goes directly into the valve, without the short pieces of connecting tubing required if a reducing union was used instead. (A reducing ferrule would also work, but makes a seal of less integrity.) Once the fitting is installed, only one wrench is required to remove and reinstall it.

A second version has a 2 micron stainless steel frit pressed into the end of the liner, adding filtering capability. However, we suggest using these only as a final or backup filter, with a standard filter (see page 52) as the primary filter. Because IZR's have a much smaller surface area than the standard filter, they tend to plug too often if used in a stand-alone capacity.




Patent No. 4,173,363.

Tubing OD	Bore	Without frit		With 2µ frit	
		Prod No	Price	Prod No	Price
1/16" to 1/32"	0.25 mm	IZR1.5	\$22	IZR1.5F	\$28
	0.50 mm	IZR1.5L	20	IZR1.5LF	25
	1/32"	IZR1.5T	20	-	-
1/8" to 1/16"	0.25 mm	IZR21C	15	IZR21CF	21
	0.50 mm	IZR21	13	IZR21F	19
	1.00 mm	IZR21L	13	IZR21LF	19
	1/16"	IZR21T	13	-	-
1/4" to 1/16"	1.00 mm	IZR41	14	IZR41F	20
1/4" to 1/8"	1.00 mm	IZR42	14	IZR42F	20
1/4" to 1/8"	2.00 mm	IZR42L	14	IZR42LF	20

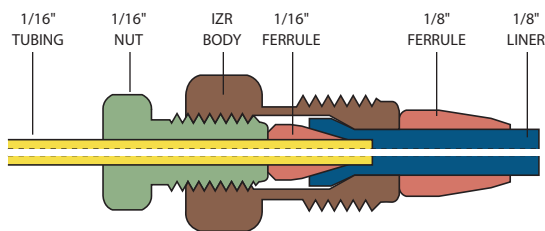

Valco's unique internal reducer (IZR21)



IZR liner with pressed-in frit

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

External to Internal Adapters



External to internal adapters (injector/detector adapters)


EZAs (external adapters) and EZRs (external reducers) adapt an external tee or union or the external type fittings common on injectors and detectors to Valco zero dead volume connections. Since EZAs are commonly used to connect an external fitting to an existing tube already made up with a Valco internal fitting, a nut and ferrule are not included.

Only one wrench is required to change tubes after the fitting is made up. While an external to internal union or reducing union plus a length of tubing can accomplish the same thing, these adapters do the trick with a single fitting.


Standard material is 300 series stainless. The EZA does not include a nut or ferrule. The EZR includes a liner, one nut, and two ferrules.

Patent No. 4,173,363

Description	Bore	Prod No	Price
External to internal adapters			
1/16" ext. to 1/16" int.	-	EZA1	\$16
1/8" ext. to 1/8" int.	-	EZA2	16
External reducers			
1/16" ext. to 1/32" int.	0.25 mm	EZR1.5	24
	1/32"	EZR1.5T	24
1/8" ext. to 1/32" int.	0.25 mm	EZR2.5	22
	1/8" ext. to 1/16" int.	0.50 mm	EZR21
		1/16"	EZR21T
1/4" ext. to 1/16" int.	1.00 mm	EZR41	24
	1/16"	EZR41T	24
1/4" ext. to 1/8" int.	1.00 mm	EZR42	26
	1/8"	EZR42T	26

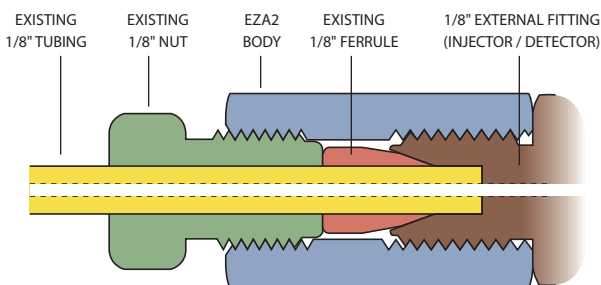

External to internal adapter (EZA2)

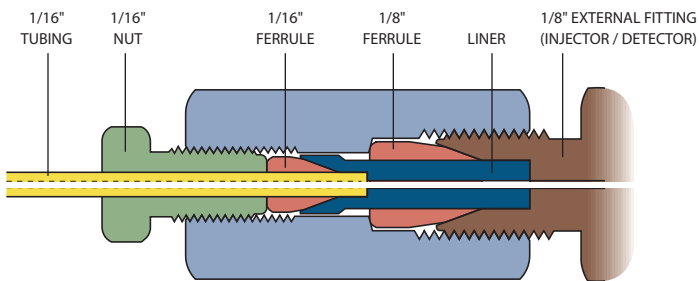

External to internal reducer (EZR21)

MORE INFORMATION
 Ferrules page 12
 Nuts 10


Special Fittings

Tube adapters

These external adapters are ideal for connecting 1/16" tubing to a detector or injector with a 1/4" fitting. The shorter size is used with 1/4" external fittings while the longer works with 1/4" internal or external fittings. (1/16" nut and ferrule are included; 1/4" nut and ferrule are not.) Standard material is 300 series stainless.



Description	Bore	Prod No	Price
1/4" to 1/16"			
0.975" long	1/16"	ZTA41	\$12
2.075" long	1/16"	ZLTA41	14
2.800" long	1/16"	ZXLTA41	17

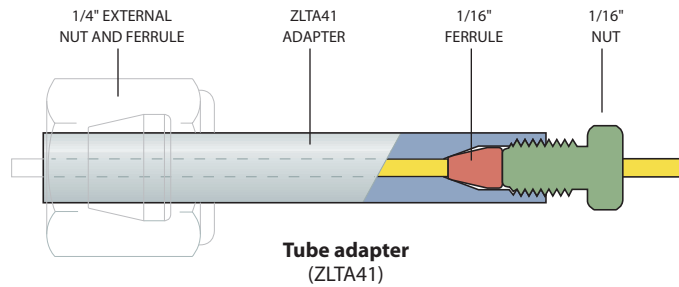


Aerosol adapter bulkhead union

This unique fitting provides an easy, direct method of connecting the nozzle of a standard aerosol can to a 1/16" Valco zero dead volume fitting.

As with all Valco bulkhead fittings, the flange is undercut to act as a "lock nut" against the instrument wall. Standard material is 300 series stainless.



Description	Prod No	Price
Aerosol adapter bulkhead union	ZBAA1	\$29

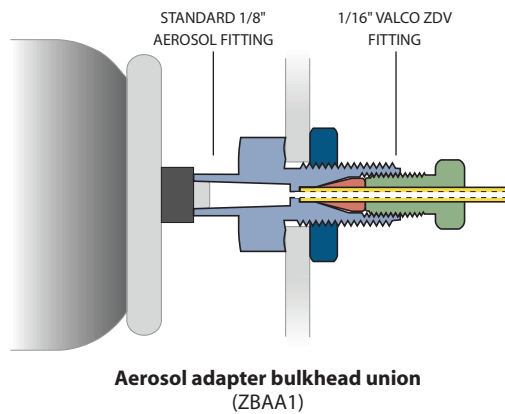


0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

Manifold pipe adapters


These manifolds, which go from one or two pipe fittings to three or more Valco zero dead volume fittings, minimize the number of connections between a regulator and the various carrier gas lines in a chromatographic system. The models with two pipe fittings go a step further, allowing the support of a gauge, a second regulator, or a valve leading to a separate system. Additional Valco zero dead volume fittings can be machined on a special order basis. Standard material is 300 series stainless. Also available in Hastelloy C and titanium by special order.




Description	Bore	Prod No	Price
One 1/8" female pipe to:			
three 1/16" ZDV fittings	1.0 mm	FP1Z3M21	\$67
three 1/8" ZDV fittings	2.0 mm	FP1Z3M22	62
three 1/4" ZDV fittings	4.6 mm	FP1Z3M24	62
One 1/4" female pipe to:			
three 1/16" ZDV fittings	1.0 mm	FP1Z3M41	67
three 1/8" ZDV fittings	2.0 mm	FP1Z3M42	62
three 1/4" ZDV fittings	4.6 mm	FP1Z3M44	62
Two 1/8" female pipe to:			
three 1/16" ZDV fittings	1.0 mm	FP2Z3M21	77
three 1/8" ZDV fittings	2.0 mm	FP2Z3M22	72
three 1/4" ZDV fittings	4.6 mm	FP2Z3M24	72
Two 1/4" female pipe to:			
three 1/16" ZDV fittings	1.0 mm	FP2Z3M41	77
three 1/8" ZDV fittings	2.0 mm	FP2Z3M42	72
three 1/4" ZDV fittings	4.6 mm	FP2Z3M44	72

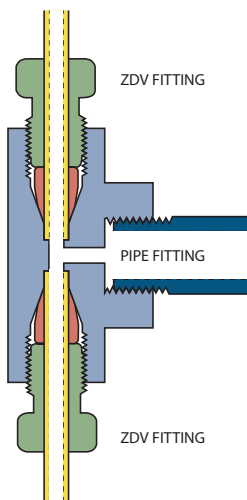

One pipe fitting
to Valco ZDV fittings

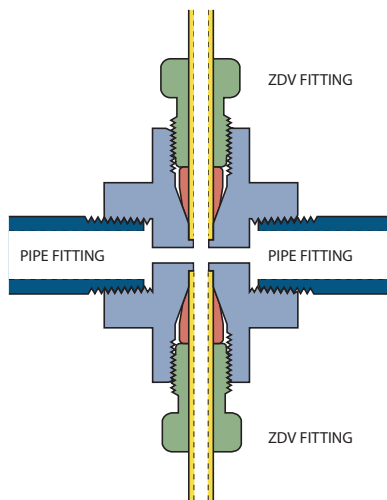

Two pipe fittings
to Valco ZDV fittings

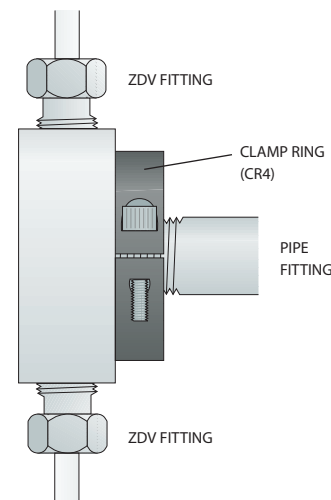

Adapter with optional
mounting clamp ring

Pipe Adapters

Male pipe to Valco internal adapters

Male pipe adapters make a minimum volume connection from the female pipe fittings on pressure gauges and regulators to Valco zero dead volume internal fittings. Standard material is 300 series stainless. Also available in Hastelloy C and titanium.

Description	Bore	Prod No	Price
1/8" NPT male to:			
1/16" ZDV fitting	1.0 mm	PZA21	\$14
1/16" ZDV fitting	1/16"	PZA21T	14
1/8" ZDV fitting	1.0 mm	PZA22	14
1/4" NPT male to:			
1/16" ZDV fitting	1.0 mm	PZA41	14
1/8" ZDV fitting	1.0 mm	PZA42	14
1/8" ZDV fitting	2.0 mm	PZA42L	14
1/4" ZDV fitting	4.6 mm	PZA44L	14
1/2" NPT male to:			
1/16" ZDV fitting	1.0 mm	PZA81	24
1/8" ZDV fitting	1.0 mm	PZA82	24
1/8" ZDV fitting	2.0 mm	PZA82L	24
1/4" ZDV fitting	4.6 mm	PZA84L	24



MORE INFORMATION

Our manifold pipe adapters on page 37 allow you to connect one or two pipe fittings to three Valco zero dead volume fittings.

Female pipe to Valco internal adapters




Female pipe adapters make a minimum volume connection from the male pipe fittings typically found in gas distribution plumbing to Valco zero dead volume internal fittings. Standard material is 300 series stainless. Also available in Hastelloy C and titanium.

Description	Bore	Prod No	Price
1/8" NPT female to:			
1/16" ZDV fitting	1.0 mm	FPZA21	\$16
1/8" ZDV fitting	1.0 mm	FPZA22	16
1/8" ZDV fitting	2.0 mm	FPZA22L	16
1/4" NPT female to:			
1/16" ZDV fitting	1.0 mm	FPZA41	17
1/8" ZDV fitting	1.0 mm	FPZA42	17
1/8" ZDV fitting	2.0 mm	FPZA42L	17
1/4" ZDV fitting	4.6 mm	FPZA44L	17
1/2" NPT female to:			
1/16" ZDV fitting	1.0 mm	FPZA81	29
1/8" ZDV fitting	1.0 mm	FPZA82	29
1/8" ZDV fitting	2.0 mm	FPZA82L	29
1/4" ZDV fitting	4.6 mm	FPZA84L	30



TECH TIP

NPT, National Pipe Thread, is a standard developed a long time ago by people without rulers. 1/8" NPT is nowhere close to 1/8"! Measure the diameter of the fitting across the narrow end. You can also count the number of threads in a 1" section. Then look at the diagrams below to determine the correct size needed.





Male pipe to Valco external adapters

Male pipe adapters make a minimum volume connection from the female pipe fittings typically found on pressure gauges and regulators to Valco external fittings. Standard material is 300 series stainless.

Note: We do not manufacture adapters with 1/16" external fittings because they have very thin, easily distorted walls. We recommend use of the PZAs on the facing page.

Description	Bore	Prod No	Price
1/8" NPT male to:			
1/8" external fitting	2.0 mm	PEA22	\$14
1/4" external fitting	4.6 mm	PEA24	14
1/4" NPT male to:			
1/8" external fitting	2.0 mm	PEA42	14
1/4" external fitting	4.6 mm	PEA44	14
1/2" NPT male to:			
1/8" external fitting	2.0 mm	PEA82	24
1/4" external fitting	4.6 mm	PEA84	25

Female pipe to Valco external adapters

Female pipe adapters make a minimum volume connection from the male pipe fittings typically found in gas distribution plumbing to Valco external fittings. Standard material is 300 series stainless.

Note: We do not manufacture adapters with 1/16" external fittings because they have very thin, easily distorted walls. We recommend use of the FPZAs on the facing page.

Description	Bore	Prod No	Price
1/8" NPT female to:			
1/8" external fitting	2.0 mm	FPEA22	\$16
1/4" external fitting	4.6 mm	FPEA24	16
1/4" NPT female to:			
1/8" external fitting	2.0 mm	FPEA42	17
1/4" external fitting	4.6 mm	FPEA44	17
1/2" NPT female to:			
1/8" external fitting	2.0 mm	FPEA82	29
1/4" external fitting	4.6 mm	FPEA84	30



TECH TIP

Because of their dead volume and the risk of thread leaks, pipe fittings are a poor choice for trace gas analysis. Thread sealants, particularly PTFE tape, cannot boost their performance to adequate levels. For trace gas applications, choose Valco zero dead volume fittings with gold-plated stainless ferrules. (See page 12.)

- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

Syringe Adapters

NEW Zero dead volume fill ports

The ZVISF-1 is a unique fill port fitting designed so that a leaktight seal is formed against the face of the bottom of the fitting detail instead of at the end of an angular ferrule, resulting in a true zero dead volume connection with no carry over or sample loss. The polymer bushing snaps into the knurled PEEK nut, providing the convenience of a one-piece fitting. An ultrathin metal sleeve surrounds and supports the portion of the bushing which extends into the pilot of the fitting detail, preventing the bushing from mushrooming and getting stuck in the pilot as the fitting is tightened.



For use with 22 gauge blunt tip needle.

Description	Prod No	Price	
For high pressure 1/16" Cheminert injectors with polymeric stators (C2, C3, C4, and C52 series)			
Most applications	PFA bushing	ZVISF-1PFAH	\$35
High throughput applications	High density polyethylene bushing	ZVISF-1PEH	40
For low pressure 1/16" Cheminert injectors, fittings, and most Valco injectors			
Most applications	PFA bushing	ZVISF-1PFA	\$30
High throughput applications	High density polyethylene bushing	ZVISF-1PE	35







Fill ports *for 1/16" polymeric Cheminert valves*

These fill ports provide direct syringe connections to polymeric valves and fittings. Since the fitting detail in the high pressure Cheminert valve is unique, be sure to order the high pressure version for polymeric HPLC injectors. For use with 22 gauge blunt tip needle.

Description	Prod No	Price	
For high pressure injectors (C2, C3, C4, and C52 series injectors)			
	C-VISF-1H	\$11.00	
For fittings and low pressure injectors (C22Z and C62Z series injectors)			
	C-VISF-1	11.00	
Replacement liners and ferrules			
Liner for C-VISF-1	VISL-1	2.50	
Liner for C-VISF-1H	VISL-1H	2.50	
Ferrule for C-VISF-1 (or 1H)	ZF1VISF	4.50	

Fill ports *for metal Valco and Cheminert valves*

Fill ports provide direct syringe connections to valves and fittings, with the polymeric ferrule compressing a liner to seal around the needle. These fill ports are for use with metal valves.


Description	Prod No	Price	
For use with blunt tip needle			
For 1/16" fittings and injectors - 22 ga	VISF-1	\$9.00	
For 1/32" fittings and injectors - 26 ga	VISF.5FPK	12.00	
For use with 2" 22 gauge blunt tip needle			
For 1/16" fittings and injectors	VISF-2	15.00	
For 1/8" fittings and injectors	VISF-A	23.00	
Replacement liners and ferrules			
Liner for VISF-1	VISL-1	2.50	
Liner for VISF-2 or VISF-A	VISL-2	2.50	
Ferrule for VISF-1 or VISF-2	ZF1VISF	4.50	

TECH TIP
When using Cheminert Nanovolume® CN2 injectors and valves, use fill ports designed just for them.



Nanovolume fill ports page 60

Syringe Adapters

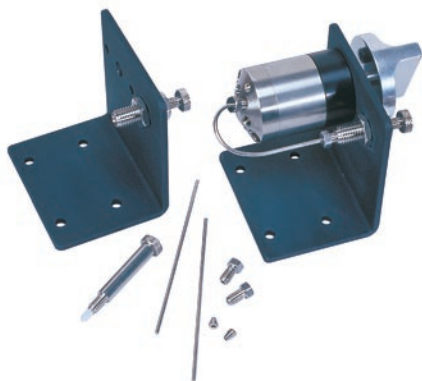

for Cheminert C2 and C4 valves

Loop fill port assembly

The loop fill port assembly, for use with Cheminert high pressure valves (C2 and C4 series), permits sample loading and manual injection from the front of the valve. It includes an aluminum bracket, two syringe fill ports (for 3/4" or 2" needles), a bulkhead union, and two pieces of stainless tubing: one piece is 0.013" ID with a volume of 7 µl, and the other is 0.50 mm ID and 17 µl.

Description	Prod No	Price
Loop fill port assembly	C-LFP	\$50



Female luer adapters

Female luer adapters provide direct syringe connections to zero dead volume fittings and valves.


Description		Prod No	Price
Female luer to:	1/32" fitting	ZLA-5	\$23.00
	1/16" fitting	ZLA-1	14.00
	1/8" fitting	ZLA-2	23.00



Septum injector nuts

Septum injector nuts are a simple way to provide syringe access to any point of a gas or liquid system. The injector nut includes a Valcon T polyimide septum support which accepts a standard 1/4" GC septum. The nut's 1/8" external fitting detail can connect directly to common external type fittings, or can be adapted to Valco internal fittings using an external/internal union or reducing union.

Description	Prod No	Price
Septum injector nut with support	EN2SI	\$22
Replacement support	ZF2SI	6
Septum, low bleed, pka. of 10	SI4G	17

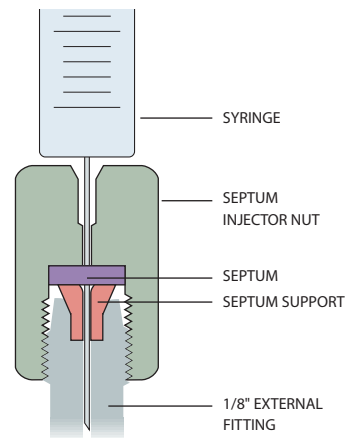

Septum injector nut
with septum and support (EN2SI)

MORE INFORMATION

External/internal reducing unions . . . pg 31
External/internal unions 27

Cheminert valves

Model C2 158, 161
Model C4 159, 162

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

HPLC Column End Fittings


Although our column end fittings look like ordinary reducing unions, they are machined with a conical recess to match a specific column ID so that there are no abrupt or irregular diameter changes which can cause loss of theoretical plates. (See illustrations, below.) This optimization results in an assortment of column end fittings for each column OD. To receive full benefit of this design, use column end fittings only with the specific column ID for which they are intended. We can design special fittings for unusual sizes or OEM use.

If a temporary frit is used during column packing, the frit OD should match the column OD. Permanent frits should have an OD matched to the column ID, and should be pressed in to give the lowest dead volume. Our frits are available in a variety of pore sizes,

and we offer titanium and Hastelloy C frits for systems sensitive to exposed stainless steel.

All column end fittings are rated to 10,000 psi. However, the functional limit is dictated by the yield strength of the tubing used with the fitting. Standard 1/4", 3/8", and 1/2" columns are usually packed at 8,000-10,000 psi, which is right at the yield strength for the tubing commonly used. Columns with 1" ID have a yield strength of 6,000-8,000 psi, and the fitting will not hold if the system pressure exceeds that limit.

The newest addition to the line is the Nanovolume® column end fitting. (See page 62.) These all-PEEK fittings feature fingertight zero dead volume connections with 100 or 150 micron bore. PEEK sleeves permit use with any fused silica tubing.

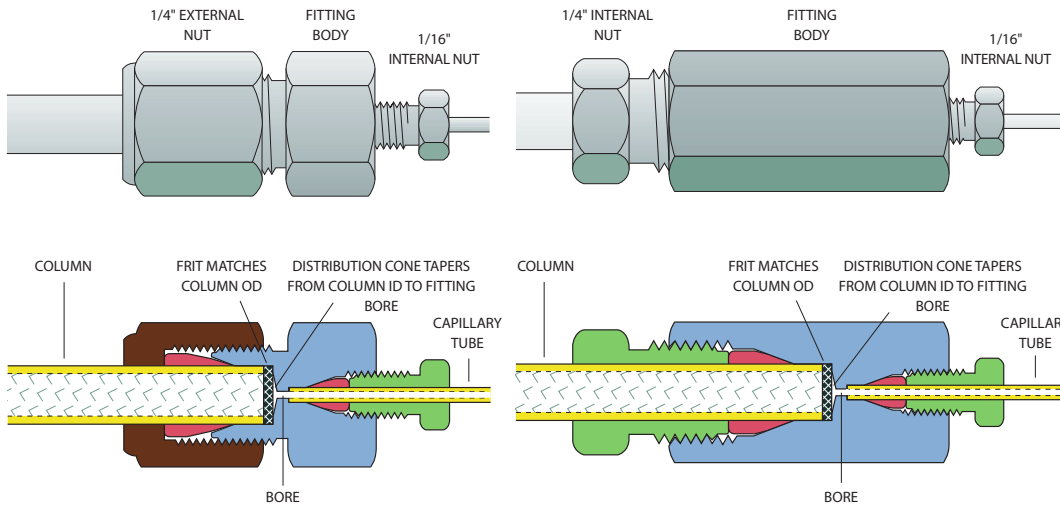

External column end fitting

1/4" to 1/16", 4.6 mm column ID, with removable frit (ECE414.6F)

Internal column end fitting

1/4" to 1/16", 4.6 mm column ID, with removable frit (CEF414.6F)

MORE INFORMATION
Frits..... page 45

TECH TIP
Standard column end fittings are Type 316 stainless, but since the column wall and frit form over 99% of the column surface area, standard fittings with titanium frits can generally be used on inert columns.

TECH TIP
When packing columns, use Valco "through-type" unions to couple the column to the packing reservoir.

Size	Prod No
1/16" union	ZU1T
1/8" union	ZU2T
1/4" union	ZU4T


Through-type unions for packing columns..... page 26

Microbore column end fittings


(1.0 mm – 2.0 mm column ID)

Standard material is Type 316 stainless.

	Bore	Column ID	Without frit		Removable 2µ frit		
			Prod No	Price	Prod No	Price	
External column end fittings							
	1/16" to 1/16"	0.25 mm	1.0 mm	ECEF111.0	\$17	ECEF111.OF	\$18
	1/8" to 1/16"	0.25 mm	1.0 mm	ECEF211.0	16	ECEF211.OF	17

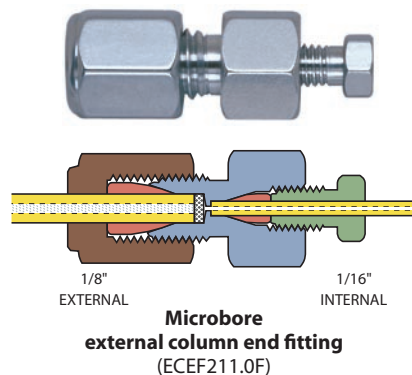

	Bore	Column ID	Without frit		Removable 2µ frit		
			Prod No	Price	Prod No	Price	
Internal column end fittings							
	1/16" to 1/32"	0.25 mm	1.0 mm	CEF1.5	\$23	CEF1.5F	\$24
	1/16" to 1/16"	0.25 mm	1.0 mm	CEF1	17	CEF1F	18
	1/8" to 1/32"	0.25 mm	1.0 mm	CEF2.51.0	23	CEF2.51.OF	23
	1/8" to 1/16"	0.25 mm	1.0 mm	CEF211.0	16	CEF211.OF	17
	1/8" to 1/16"	0.25 mm	2.0 mm	CEF212.0	16	CEF212.OF	17

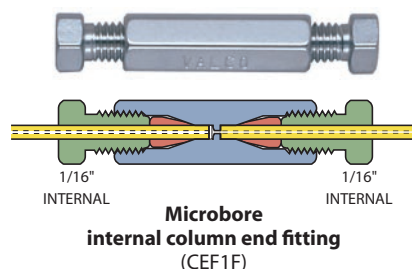

NANOBORE COLUMN END FITTINGS

See our complete line of 100 µm and 150 µm bore fittings on page 62.


- 100 µm = .004"
- 150 µm = .006"
- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

HPLC Column End Fittings

Analytical column end fittings *(2.0 mm – 4.6 mm column ID)*


Standard material is Type 316 stainless.

	Bore	Column ID	Without frit		Removable 2 μ frit	
			Prod No	Price	Prod No	Price
External column end fittings						
1/4" to 1/16"	0.4 mm	2.1 mm	ECEF412.1	\$16	ECEF412.1F	\$17
1/4" to 1/16"	0.4 mm	3.0 mm	ECEF413.0	16	ECEF413.0F	17
1/4" to 1/16"	0.4 mm	4.0 mm	ECEF414.0	16	ECEF414.0F	17
1/4" to 1/16"	0.4 mm	4.6 mm	ECEF414.6	16	ECEF414.6F	17

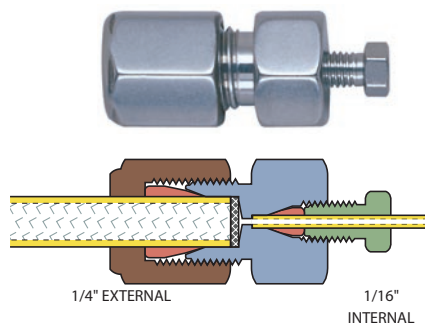

Analytical external column end fitting with removable frit (ECEF414.6F)

	Bore	Column ID	Without frit		Removable 2 μ frit	
			Prod No	Price	Prod No	Price
Internal column end fittings						
1/4" to 1/16"	0.4 mm	2.1 mm	CEF412.1	\$15	CEF412.1F	\$16
1/4" to 1/16"	0.4 mm	3.0 mm	CEF413.0	15	CEF413.0F	16
1/4" to 1/16"	0.4 mm	4.0 mm	CEF414.0	15	CEF414.0F	16
1/4" to 1/16"	0.4 mm	4.6 mm	CEF414.6	15	CEF414.6F	16

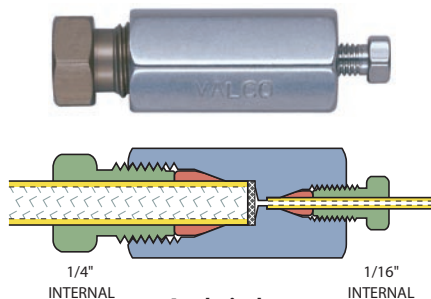

Analytical internal column end fitting with removable frit (CEF414.6F)

NANOBORE COLUMN END FITTINGS


See our complete line of 100 μ m and 150 μ m bore fittings on page 62.

100 μ m	=	.004"
150 μ m	=	.006"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

Semi-preparative and preparative column end fittings

Standard material is Type 316 stainless.


	Bore	Column ID	Without frit		Removable 2µ frit	
			Prod No	Price	Prod No	Price
External column end fittings						
3/8" to 1/16"	0.40 mm	6.0 mm	ECEF616.0	\$24	ECEF616.0F	\$25
3/8" to 1/16"	0.40 mm	7.0 mm	ECEF617.0	24	ECEF617.0F	25
1/2" to 1/16"	0.75 mm	9.0 mm	ECEF819.0	26	ECEF819.0F	28
1/2" to 1/16"	0.75 mm	10.0 mm	ECEF8110.0	26	ECEF8110.0F	28
1" to 1/16"	0.75 mm	20.0 mm	ECEF1K1	70	ECEF1K1F	72

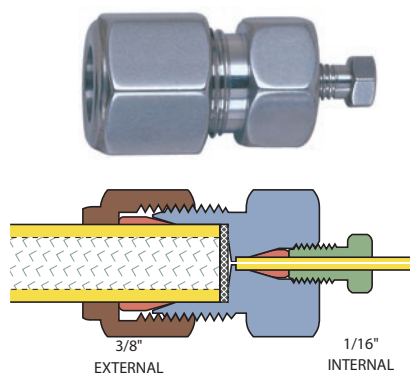

Semi-preparative external column end fitting (ECEF616.0F)

Replacement frits

1/16", 1/8" and 1/4" frits are sold in packages of 10. 3/8", 1/2", and 1" frits are sold individually. Other sizes may be available or special-ordered in OEM quantities.




	Pore Size	Frit thickness	Stainless steel		Hastelloy C		Titanium	
			Prod No	Price	Prod No	Price	Prod No	Price
<i>Package of 10:</i>								
1/16" frits	0.5µ	0.75 mm	.5FR1-10	\$12	.5FR1HC-10	\$21	-	-
	2µ	0.75 mm	2FR1-10	12	2FR1HC-10	23	2FR1TI-10	\$35
	10µ	0.75 mm	10FR1-10	12	-	-	-	-
1/8" frits	0.5µ	1.00 mm	.5FR2-10	12	-	-	-	-
	2µ	1.00 mm	2FR2-10	12	2FR2HC-10	23	2FR2TI-10	45
	10µ	1.00 mm	10FR2-10	12	-	-	-	-
1/4" frits	0.5µ	1.00 mm	.5FR4-10	12	-	-	-	-
	2µ	1.00 mm	2FR4-10	12	2FR4HC-10	30	2FR4TI-10	60
	10µ	1.00 mm	10FR4-10	12	10FR4HC-10	30	-	-
<i>Each:</i>								
3/8" frits	2µ	1.00 mm	2FR6	\$1.25	2FR6HC	\$2.25	2FR6TI	\$6.00
1/2" frits	2µ	1.00 mm	2FR8	1.75	2FR8HC	3.50	2FR8TI	7.00
1" frits	2µ	1.50 mm	2FR1K	2.25	2FR1KHC	4.50	2FR1KTI	9.00


Post-Column Reaction Tee Fittings

Post-column reaction tee fitting

The tee column end fitting (TCEF) has a third connection perpendicular to the normal flowpath. The TCEF permits post-column derivation, or may be used as a curtain flow column inlet fitting. Standard material is Type 316 stainless.

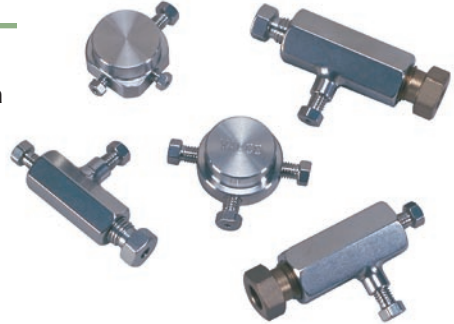

Column OD	Cone OD	Inlet/outlet OD	Bore	Side OD	Bore	Prod No	Price
1/16"	1.0 mm	1/32"	0.25 mm	1/32"	0.25 mm	TCEF1.5.5C	\$68
1/16"	1.0 mm	1/32"	0.90 mm	1/32"	0.25 mm	TCEF1.5.5T	68
1/16"	1.0 mm	1/16"	0.25 mm	1/16"	0.25 mm	TCEF111	48
1/8"	1.0 mm	1/16"	0.75 mm	1/16"	0.75 mm	TCEF211	48
1/8"	1.0 mm	1/16"	1.65 mm	1/16"	0.40 mm	TCEF211T	48
1/4"	4.6 mm	1/16"	0.25 mm	1/16"	0.25 mm	TCEF411C	55
1/4"	4.6 mm	1/16"	0.75 mm	1/16"	0.75 mm	TCEF411	48
1/4"	4.6 mm	1/16"	1.65 mm	1/16"	0.75 mm	TCEF411T	48
1/4"	4.6 mm	1/8"	0.75 mm	1/16"	0.75 mm	TCEF421	48
3/8"	6.0 mm	1/16"	0.75 mm	1/16"	0.75 mm	TCEF611	60
3/8"	6.0 mm	1/16"	1.65 mm	1/16"	0.75 mm	TCEF611T	60
1/2"	9.0 mm	1/16"	0.75 mm	1/16"	0.75 mm	TCEF811	68
1/2"	9.0 mm	1/16"	1.65 mm	1/16"	0.75 mm	TCEF811T	68

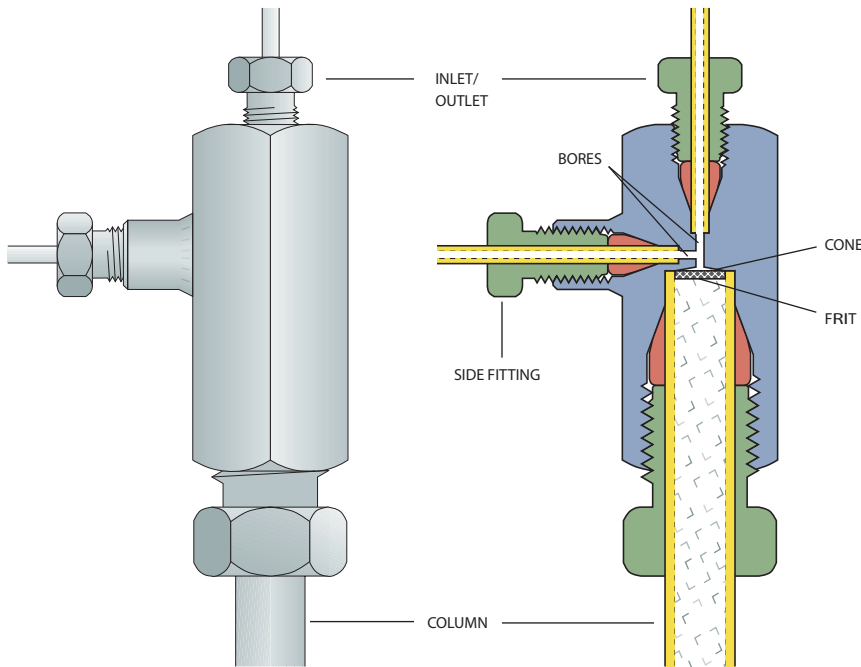

Post-column reaction fitting
(TCEF411)

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm


Precolumns (Guard Columns)



Precolumns (guard columns)

Precolumns are available in 2 cm and 5 cm lengths, and can be filled with either 5 μ packing or 37 - 44 μ pellicular packing. Both lengths are used in conjunction with a column end fitting. When packed for high efficiency they can be used as analytical columns, but a more typical use is as a guard column installed between the injector and the analytical column. Standard material is Type 316 stainless.

Description	Prod No	Price
1/4" x 2 cm precolumn system	PCS412F	\$43
Includes:		
One precolumn insert		
One internal column end fitting		
One 2 μ frit		
1/4" x 5 cm precolumn system	PCS415F	55
Includes:		
One precolumn insert		
One external column end fitting		
One 2 μ frit		
Precolumns (for use with existing column end fittings)		
1/4" x 2 cm precolumn insert	PCL412	29
1/4" x 5 cm precolumn insert	PCL415	40

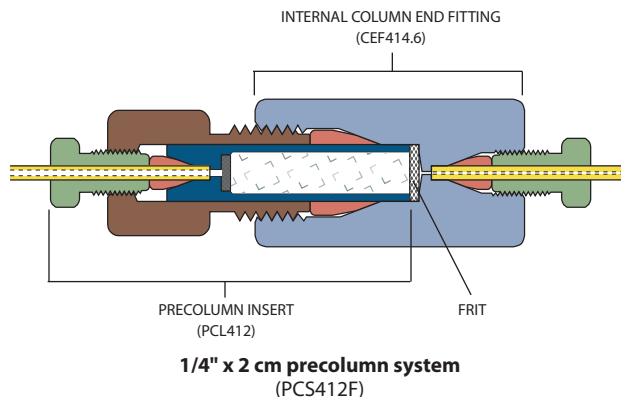

Fingertight HPLC cartridge precolumns



This cartridge-based system is designed for use as a precolumn or concentrator column in HPLC and FIA applications. It is particularly suited to applications requiring frequent changes: snap-on seals are replaceable, the cartridge is reusable, and the tubing connections are stable since the end fittings do not rotate as the assembly is tightened. Standard material is Type 316 stainless, with PEEK seals and 2 μ titanium frits.

Description	Prod No	Price
0.25 ml (4.0 mm ID x 2 cm)		
Fin gertight cartridge assembly	SFECH412	\$57.50
Replaceable cartridge	SFEC42	20.00

NOTE:
As a courtesy to our OEM customers, VICI does not supply pre-packed columns.

Filters


There are many flow elements of analytical instruments which require protection from foreign particles, such as orifices that may become plugged or surfaces that may get scratched. However, conventional filtering devices may have too large a volume to be consistent with good system performance – particularly in chromatographic applications.

Valco's unique patented* filter design results in extremely low internal volume and simplifies filter element replacement. Filter bodies are "coned" for uniform flow and maximum filter surface area. The filters are made entirely of metal, so they can be used at any instrumentation temperature. While the standard metal is 316 series stainless, filters can be made from alloys that can be used in virtually any application.

We offer a choice of three different filtering elements. All styles are available in bulkhead configurations for mounting on a panel or instrument wall. (Please note that since frits and

screens have significantly different thicknesses, they cannot be used interchangeably in the same filter body.)

- **Pressed frits**, permanently installed in the filter, are recommended where contaminants are the exception and not the rule. The frits are 2 μ stainless.
- **Removable frits** are the best choice for maximum filtration, or if the application requires Hastelloy C or titanium. However, they allow more mixing and tend to clog more than screens. A 2 μ frit is included with the filter, but 0.5, 2, and 10 μ replacement frits are available in three materials.
- **Removable screens** plug less rapidly and provide lower pressure drop than frits. Since they are thinner, there is less mixing and dispersal than might occur with a frit, but frits provide better filtration. A 2 μ screen is included with the filter, and 2 and 10 μ stainless replacement screens may be ordered.

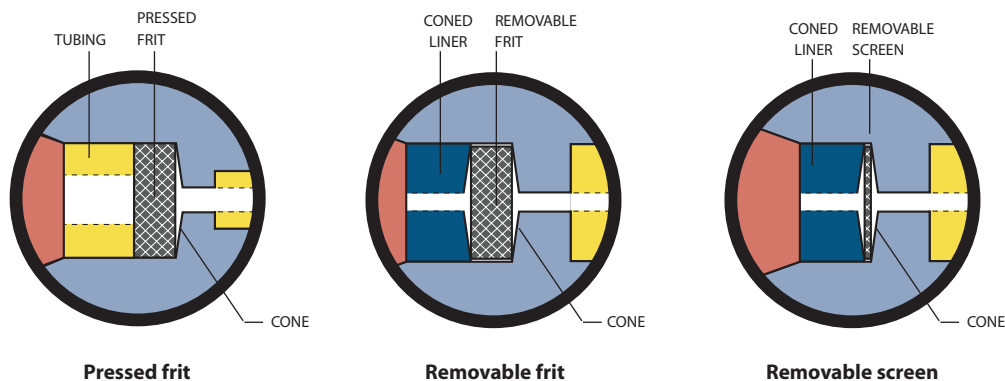

Pressed frit

Removable frit

Removable screen


* Patent Numbers 4,281,679 and 4,173,363

MORE INFORMATION
 Biocompatible filter . p 78
 In-line filters for
 1/4-28 fittings 78
 Mobile phase
 filters. 79

Filters with removable frits are designed to compensate for the thickness of the filter element – the resulting pilot depths are identical with the rest of the Valco product line, facilitating interchangeability of *made up* fittings. Therefore, although our filters look very much like our unions, they are not interchangeable with unions; a filter with its frit removed should not be substituted for a union,

because the space designed for the frit introduces dead volume into the system. In addition, since filter bodies are coned, they will have dead volume when used as a union even if the tubing is made up in the filter with a longer, non-standard pilot length.


An arrow imprinted on all filter bodies serves to differentiate them from unions and to indicate recommended flow direction.

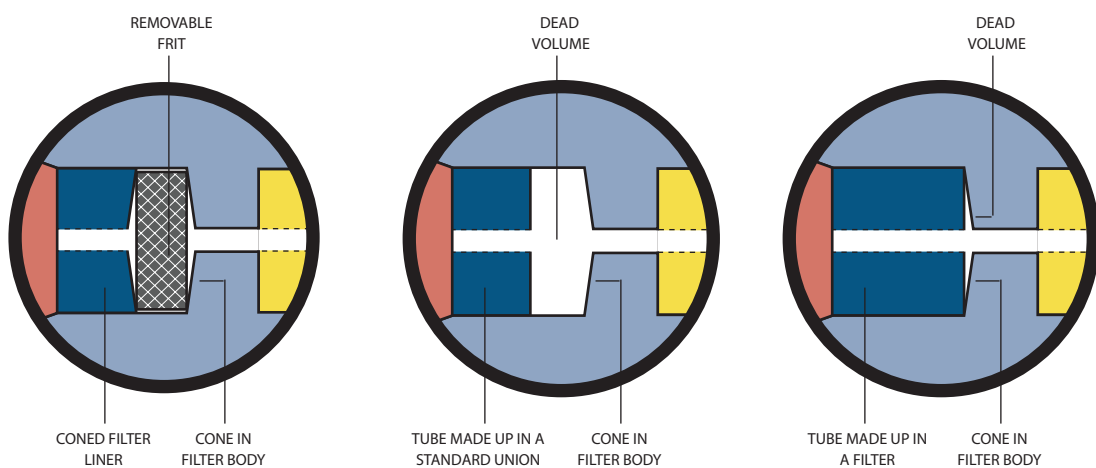

Filter with removable frit
Coned for uniform flow and maximum filter surface

Filter with frit removed being used as a reducing union
Dead volume is created where frit should be

Filter with frit removed being used as a reducing union
Cone in filter body creates dead volume

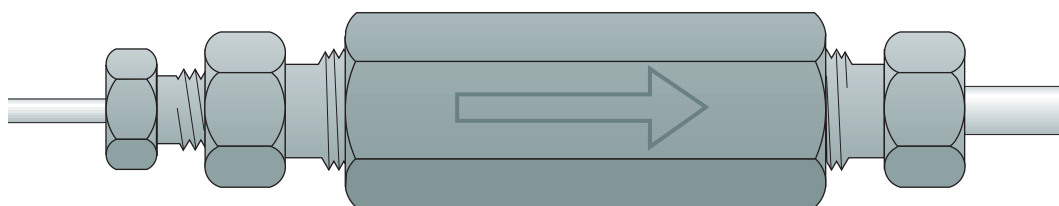

Arrow imprinted on filter body showing recommended direction of flow



Filters

Filters with a pressed frit

Pressed frit filters contain a permanently installed stainless steel 2 μ frit, and are recommended for applications where contaminants are the exception and not the rule – that is, when the sample is generally clean but you wish to guard against the stray burr from a carelessly prepared tube end that might find its way into the flowpath. Standard material is Type 316 stainless.



Description	Bore	Standard		Bulkhead	
		Prod No	Price	Prod No	Price
1/16" to 1/32"	0.25 mm	ZRUF1.5	\$29	ZBRUF1.5	\$35
1/16" to 1/16"	0.75 mm	ZUF1	18	ZBUF1	24
1/8" to 1/16"	0.75 mm	ZRUF21	21	ZBRUF21	25
1/8" to 1/8"	0.75 mm	ZUF2	21	ZBUF2	25
1/4" to 1/8"	2.00 mm	ZRUF42	21	ZBRUF42	26
1/4" to 1/4"	4.60 mm	ZUF4	21	ZBUF4	26

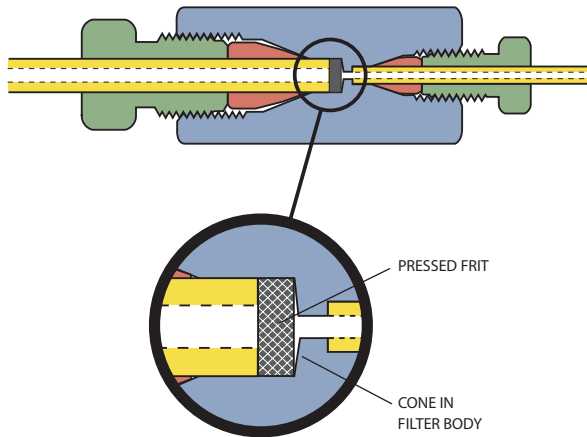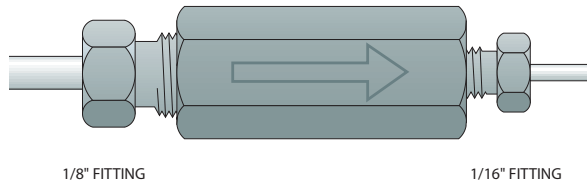

Reducing filter with a pressed frit
1/8" to 1/16"
(ZRUF21)

0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"
1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"
4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"
7.0 mm = .275"
10.0 mm = .400"
27.0 mm = 1.08"
1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm
1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm



Filters with a removable frit



These filters come with a removable 2µ frit. The standard frit can be replaced with any frit of the proper diameter, *but not by a screen*. These filters are suitable for streams with frequent contamination, since the filtering element is easily changed. Standard material is Type 316 series stainless.

Patent Numbers 4,281,679 and 4,173,363

Description	Bore	Standard		Bulkhead	
		Prod No	Price	Prod No	Price
1/32" to 1/32"	0.25 mm	ZUFR.5F	\$52	ZBUFR.5F	\$57
1/16" to 1/32"	0.25 mm	ZRUFR1.5F	36	ZBRUFR1.5F	42
1/16" to 1/16"	0.25 mm	ZUFR1CF	40	ZBUFR1CF	45
	0.50 mm	ZUFR1F	30	ZBUFR1F	35
1/8" to 1/16"	0.75 mm	ZRUFR21F	30	ZBRUFR21F	35
1/8" to 1/8"	2.00 mm	ZUFR2F	30	ZBUFR2F	35
1/4" to 1/16"	1.00 mm	ZRUFR41F	33	ZBRUFR41F	38
1/4" to 1/8"	2.00 mm	ZRUFR42F	33	ZBRUFR42F	38

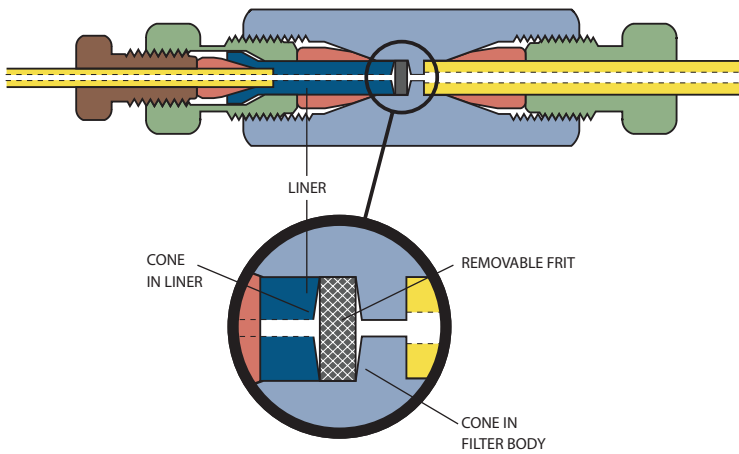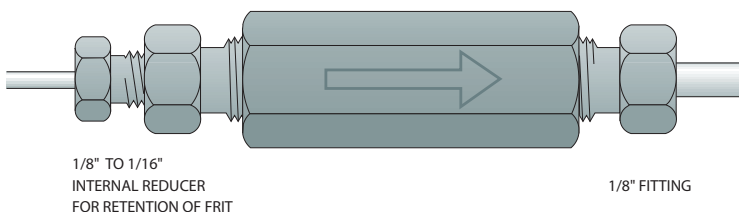

Reducing filter with a removable frit
1/8" to 1/16"
(ZRUFR21F)

TECH TIP
Should you use a filter with a frit or one with a screen?

Screens have much higher flow capacity (Cv), but frits are the best choice for maximum filtration or if your application requires Hastelloy C or titanium. However, since they are thicker than screens, frits allow more mixing, and the downside of their superior filtration is that they clog more often than screens.

Note! The difference in thickness also means that frits and screens cannot be used interchangeably in the same fitting body:

A frit must always be replaced with a frit.

A screen must always be replaced with a screen.

Replacement frits page 53



Filters

Filters with a removable screen

These filters come with a removable 2μ screen. The standard screen can be replaced with any screen of the proper diameter, *but not by a frit*. These filters are suitable for streams with frequent contamination, since the filtering element is easily changed. Standard material is Type 316 series stainless.

Patent Numbers 4,281,679 and 4,173,363

Description	Bore	Standard		Bulkhead	
		Prod No	Price	Prod No	Price
1/32" to 1/32"	0.25 mm	ZUFR.5	\$52	ZBUFR.5	\$57
1/16" to 1/32"	0.25 mm	ZRUFR1.5	36	ZBRUFR1.5	40
1/16" to 1/16"	0.25 mm	ZUFR1C	40	ZBUFR1C	45
	0.50 mm	ZUFR1	30	ZBUFR1	36
1/8" to 1/16"	0.75 mm	ZRUFR21	30	ZBRUFR21	36
1/8" to 1/8"	2.00 mm	ZUFR2	30	ZBUFR2	36
1/4" to 1/16"	1.00 mm	ZRUFR41	35	ZBRUFR41	40
1/4" to 1/8"	2.00 mm	ZRUFR42	35	ZBRUFR42	40

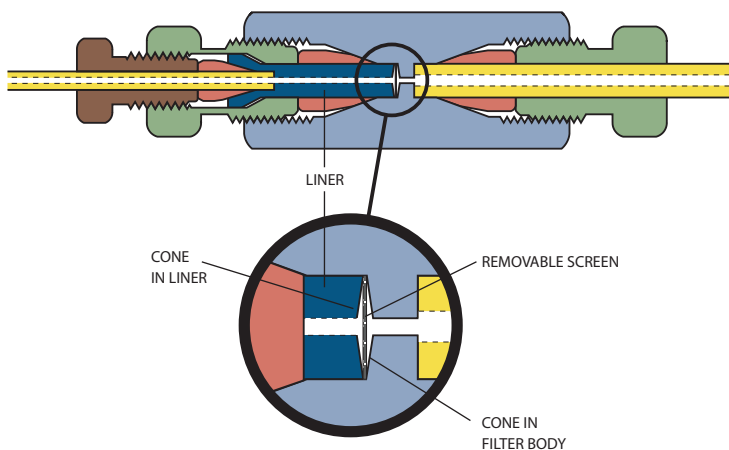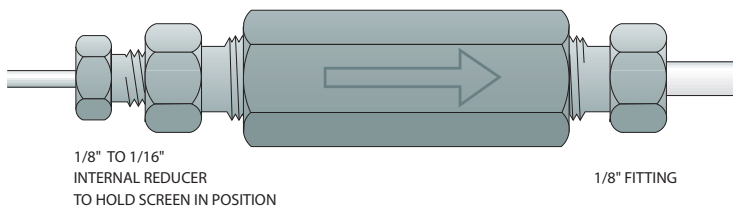

Reducing filter with a removable screen
1/8" to 1/16"
(ZRUFR21)

TECH TIP

Should you use a filter with a frit or one with a screen?

Screens have much higher flow capacity (Cv), but frits are the best choice for maximum filtration or if your application requires Hastelloy C or titanium. However, since they are thicker than screens, frits allow more mixing, and the downside of their superior filtration is that they clog more often than screens.

Note! The difference in thickness also means that frits and screens cannot be used interchangeably in the same fitting body:

A frit must always be replaced with a frit.

A screen must always be replaced with a screen.

Replacement screens..... page 53

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm


5/16"	=	.312"	=	7.9 mm
3/8"	=	.375"	=	9.5 mm
7/16"	=	.437"	=	11.1 mm

Frits and Screens for Filters

Replacement frits

Other sizes may be available or special ordered in OEM quantities.

Note: If a filter was ordered with a removable frit, the frit **cannot** be replaced with a screen.



Package of 10:	Pore Size	Frit Thickness	Stainless Steel		Hastelloy C		Titanium	
			Prod No	Price	Prod No	Price	Prod No	Price
1/16" frits	0.5µ	0.75 mm	.5FR1-10	\$12	.5FR1HC-10	\$21	-	-
	2µ	0.75 mm	2FR1-10	12	2FR1HC-10	23	2FR1TI-10	\$35
	10µ	0.75 mm	10FR1-10	12	-	-	-	-
1/8" frits	0.5µ	1.00 mm	.5FR2-10	12	.5FR2HC-10	30	-	-
	1µ	1.00 mm	1FR2-10	12	1FR2HC-10	30	-	-
	2µ	1.00 mm	2FR2-10	12	2FR2HC-10	23	2FR2TI-10	45
	10µ	1.00 mm	10FR2-10	12	-	-	-	-
1/4" frits	0.5µ	1.00 mm	.5FR4-10	12	-	-	-	-
	2µ	1.00 mm	2FR4-10	12	2FR4HC-10	30	2FR4TI-10	60
	10µ	1.00 mm	10FR4-10	12	10FR4HC-10	30	-	-

WHICH FRIT FITS MY FILTER?

1/16" frit fits:

- ZUFR.5F
- ZBUFR.5F
- ZRUFR1.5F
- ZBRUFR1.5F

1/8" frit fits:

- ZUFR1CF
- ZBUFR1CF
- ZUFR1F
- ZBUFR1F
- ZRUFR21F
- ZBRUFR21F

1/4" frit fits:

- ZUFR2F
- ZBUFR2F
- ZRUFR41F
- ZBRUFR41F
- ZRUFR42F
- ZBRUFR42F

WHICH SCREEN FITS MY FILTER?

1/16" screen fits:

- ZUFR.5
- ZBUFR.5
- ZRUFR1.5
- ZBRUFR1.5

1/8" screen fits:

- ZUFR1C
- ZBUFR1C
- ZUFR1
- ZBUFR1
- ZRUFR21
- ZBRUFR21

1/4" screen fits:

- ZUFR2
- ZBUFR2
- ZRUFR41
- ZBRUFR41
- ZRUFR42
- ZBRUFR42

Replacement screens

Other sizes may be available or special ordered in OEM quantities.

Note: If a filter was ordered with a removable screen, the screen **cannot** be replaced with a frit.



Package of 10:	Pore Size	Screen Thickness	Stainless Steel	
			Prod No	Price
1/32" screens	0.5µ	0.040 mm	.5SR.5-10	\$20
	1µ	0.050 mm	1SR.5-10	17
	2µ	0.075 mm	2SR.5-10	12
	10µ	0.125 mm	10SR.5-10	12
1/16" screens	0.5µ	0.040 mm	.5SR1-10	20
	1µ	0.050 mm	1SR1-10	17
	2µ	0.075 mm	2SR1-10	12
	10µ	0.125 mm	10SR1-10	12
1/8" screens	0.5µ	0.040 mm	.5SR2-10	20
	1µ	0.050 mm	1SR2-10	17
	2µ	0.075 mm	2SR2-10	12
	10µ	0.125 mm	10SR2-10	12
1/4" screens	0.5µ	0.040 mm	.5SR4-10	23
	1µ	0.050 mm	1SR4-10	22
	2µ	0.075 mm	2SR4-10	14
	10µ	0.125 mm	10SR4-10	14

Tools

Custom socket wrench

This 1/4" socket wrench with a slot to slip over 1/16" tubing works great for all types of 1/4" hex nuts (such as Valco 1/16" ZDV fitting nuts). It's especially useful when nuts are difficult to access with an open end wrench.

<i>Prod No</i>	<i>Price</i>
SWH4	\$7



Ferrule removal kit

When polymeric ferrules get stuck in a fitting detail, these little ferrule spears will save you from becoming so irritated that you tear up your entire lab in frustration. Each kit includes two sizes of tapered stabbers for retrieving capillary size ferrules.

<i>Prod No</i>	<i>Price</i>
FRK1	\$23



Hex key set

The hex key set has a wrench to fit any socket head screw on any VICI valve or actuator. Includes the following sizes: .050", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", and 5/32".

<i>Prod No</i>	<i>Price</i>
HKS	\$12



TECH TIP


If a fused silica tube breaks off in a through-type union, remove the nuts and the tube opposite the broken one. Clear the fitting by passing a drill or wire of the appropriate diameter into the unbroken side and through the center of the fitting.

Our ferrule removal kit can be used to remove ferrules from tee and cross fittings.



Open end wrenches

Size	For use with	Prod No	Price
3/16" x 1/4"	1/32" and 1/16" nuts	OEW	\$6
3/8" x 7/16"	1/8" nuts	OEW-2	12
1/2" x 9/16"	1/4" nuts	OEW-3	12

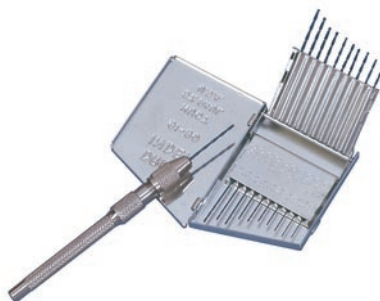

Pin vise and drill index


The drill index has drills sized from 0.0135" to 0.039" (0.34 to 1 mm). These are useful tools when a fused silica tube breaks in a union (see Tech Tip on the facing page) and for enlarging the inner diameter of fused silica adapters.

Prod No	Price
PV	\$29

Template

This tool is just what you need when you're working out plumbing and valve switching schematics. It features templates for two position valves with 4, 6, 8, and 10 ports with indications of both positions, as well as various flow symbols. For added convenience, the sides are edged with metric and inch rulers.

Prod No	Price
TEMPLATE1	\$3.50

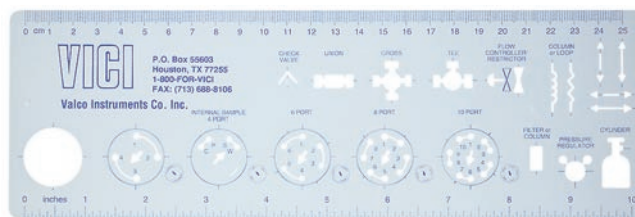

MORE INFORMATION

- Tools for valves
- Pencil magnet . . . p 210
- Valve spanner handle 211
- Tightening tools for PEEK fittings 67
- Tubing accessories 90



Cheminert® Fittings and Accessories

Cheminert fittings are ideally suited for applications requiring an inert, biocompatible, metal-free flowpath. Wetted materials are PFA, FEP, CTFE, or PEEK, and uniform flow passages minimize mixing. All connections have zero dead volume.

High Pressure Fittings

Cheminert high pressure fittings are rated at 5000 psi with fingertight nuts, well beyond the burst strength of most PEEK tubing. These fittings are machined from high quality inert polymers to the same exacting tolerances as our popular Valco zero dead volume fittings, and the taper angle and detail design conform to the industry standard established by the Valco line.

High Pressure Nanovolume® Fittings

Nanovolume generally refers to components with bore sizes of 100-150 µm (.004" - .006"). The minimal transfer volume contributed by nanovolume components makes them especially beneficial in applications with flow rates in the µl/min range, when the transfer volume can be critical.

NEW 360 Micron Nanovolume Fittings

Our newest high pressure fittings permit direct connection of 360 micron OD fused silica, PEEK, stainless, or electroformed nickel tubing without the use of liners. The ferrule snaps into the nut so that the fitting is "one-piece," but the ferrule remains free to rotate as the nut is tightened so that the tube doesn't twist. Because of the compact size and fine 2-56 threads, a leak-free connection that seals at pressures in excess of 20,000 psi can be easily formed with the available manual tool.

1/32" Nanovolume Fittings

1/32" Cheminert nanovolume fittings, with 100 µm or 150 µm bore, are ideal for high resolution capillary chromatography. Rated at 5,000 psi with fingertight nuts, they will remain leak-tight well beyond the burst strength of most PEEK tubing. These fittings are machined from high quality inert polymers to the same exacting tolerances as our popular Valco zero dead volume fittings, and the taper angle and detail design conform to the industry standard established by the Valco line.

MORE INFORMATION

High pressure Cheminert fittings pp 63-67

Low pressure Cheminert fittings 68-81

Nanovolume fittings 57-62

Valco fittings 6-55

TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards. OD tolerance should be nominal dimension ± .002".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500

10,000 psi =	689.5 bar
20,000 psi =	1,378.9 bar

50 µm =	.002"
100 µm =	.004"
150 µm =	.006"
0.25 mm =	.010"
0.50 mm =	.020"
0.75 mm =	.030"
1.0 mm =	.040"
1.5 mm =	.060"
2.0 mm =	.080"
4.6 mm =	.180"
6.0 mm =	.236"
6.4 mm =	.253"
7.0 mm =	.275"
10.0 mm =	.400"
27.0 mm =	1.08"
1/32" =	0.8 mm
1/16" =	1.6 mm
1/8" =	3.2 mm
1/4" =	6.4 mm
3/8" =	9.5 mm
1/2" =	12.7 mm

360 µm Nanovolume Fittings **NEW**



- For direct connection of 360 µm tubing
- Work with metal, fused silica, or PEEK
- Up to 20,000 psi with metal tubing
- Snap-in rotating ferrule for “one-piece” fitting with no tubing twist
- Eliminate use of troublesome liners

Our new high pressure fittings permit direct connection of 360 micron OD fused silica, PEEK, stainless, or electroformed nickel tubing without the use of liners. The ferrule snaps into the nut so that the fitting is “one-piece”, but the ferrule remains free to rotate as the nut is tightened so that the tube doesn’t twist. Because of the compact size and fine 2-56 threads, a leak-free connection that seals at pressures in excess of 20,000 psi can be easily formed with the available manual tool.

360 µm fittings are dedicated for use with either fused silica, metal, or PEEK tubing; components cannot be mixed or used with a different tubing material.

Tees and crosses offer a choice of three bore sizes, and feature a “quick-mount” base with adhesive backing to make sure that the fitting is stable and fragile tubing doesn’t get broken. There is also a quick-mount PEEK union.

MORE INFORMATION

Nanovolume fittings
 For fused silica tubing,
 10,000+ psi pg 58
 For metal tubing,
 up to 20,000 psi 58

1/32" Nanovolume
 fittings59-60
 Injectors with
 360 micron fittings. . 152

For PEEK or fused silica tubing — up to 10,000 psi

These fittings are constructed from premium grade natural PEEK material. They are intended for use with PEEK or fused silica tubing at pressures up to 10,000 psi, or the maximum pressure for which the tubing is rated, whichever is lower. Quick-mount versions have integral base with double stick tape to secure fittings to a surface.

Nut/ferrules, caps, plugs, tightening tool

for 360 µm tubing

	Prod No	Price
Nut/ferrule	C360NFPKG	\$12
Cap	C360CPKG	12
Plug	C360PPK	10
Tightening tool	C360ET	10

Unions and reducing unions

for 360 µm tubing

	Bore size:	50 micron		100 micron		150 micron	
		Prod No	Price	Prod No	Price	Prod No	Price
Union, quick mount		C360QUPKG2	\$70	C360QUPKG4	\$65	C360QUPKG6	\$60
Union		C360UPKG2	52	C360UPKG4	48	C360UPKG6	44
Reducing union, 1/16" to 360 µm		—		—		C360RU1PK6	32

Tees and crosses

for 360 µm tubing

	Bore size:	50 micron		100 micron		150 micron	
		Prod No	Price	Prod No	Price	Prod No	Price
Tee, quick mount		C360QTPKG2	\$88	C360QTPKG4	\$82	C360QTPKG6	\$76
Cross, quick mount		C360QXPKG2	106	C360QXPKG4	100	C360QXPKG6	94



CHEMINERT FITTINGS

NEW 360 µm Nanovolume Fittings




For fused silica tubing — 10,000 psi and above

These fittings are constructed from HPLC grade stainless steel, with stainless steel nut and a special ferrule which is precision machined from electroformed nickel. For optimal sealing characteristics, the ferrule is gold plated.

Nut/ferrules and caps for 360 µm FS tubing

	Prod No	Price
 Nut/ferrule	C360NFFS	\$24
 Cap	C360CFS	32



Unions and reducing unions for 360 µm FS tubing

	50 micron		100 micron		150 micron	
	Prod No	Price	Prod No	Price	Prod No	Price
 Union	C360UFS2	\$84	C360UFS4	\$80	C360UFS6	\$76
 Reducing unions, 1/32" to 360 µm	C360RU.5FS2	72	C360RU.5FS4	68	C360RU.5FS6	64
 Reducing unions, 1/16" to 360 µm	—	—	—	—	C360RU1FS6	60




For metal tubing — up to 20,000 psi

Our highest pressure Nanovolume fittings are constructed of HPLC grade stainless steel, including stainless steel nut and ferrule. These fittings are optimized for use with stainless or electroformed nickel tubing.

Nut/ferrules and caps for 360 µm tubing

	Prod No	Price
 Nut/ferrule	C360NFS6	\$12
 Cap	C360C	20

Unions and reducing unions for 360 µm tubing

	50 micron		100 micron		150 micron	
	Prod No	Price	Prod No	Price	Prod No	Price
 Union	C360US62	\$60	C360US64	\$56	C360US66	\$52
 Reducing unions, 1/32" to 360 µm	C360RU.5S62	48	C360RU.5S64	44	C360RU.5S66	40
 Reducing unions, 1/16" to 360 µm	—	—	—	—	C360RU1S66	36

NEW INTERNAL REDUCERS FOR 360 µm TUBING

Directly connect 360 µm tubing into a 1/32" Valco valve or fitting detail, providing a positive leak-free seal with zero dead volume. The same patented design as our larger internal reducers (page 34). Both versions have a stainless steel body.

Tubing OD	Nut/ferrule material	Prod No	Price
1/32" to 360 µm	Stainless	C360IZR.5S6	\$34
	PEEK	C360IZR.5S6PK	34

MORE INFORMATION

360 µm fittings for use below 10,000 psi. 57
 360 µm tubing
 Electroformed nickel. 87
 PEEK 88
 1/32" Nanovolume fittings 59-60

TECH TIP

Use these **metal 360 micron nuts** with nano injectors:
 C72MU p 152
 C72MX 152

50 µm	= .002"
100 µm	= .004"
150 µm	= .006"
0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm

Nanovolume Fittings for 1/32" Tubing

Designed for high resolution capillary HPLC, Cheminert nanovolume connectors include our one-piece 1/32" fingertight fittings, with a patented collapsible ferrule that makes fingertight nanovolume connections a snap. These fittings

work with a variety of tubing, including PEEK, fused silica, and 1/32" electroformed nickel. Liners adapt the fittings for use with fused silica.





To avoid potential confusion, all fittings utilizing the Cheminert collapsible ferrule are made of black PEEK; fittings with a standard Valco ZDV fitting detail are natural PEEK.



Nuts and ferrules

for 1/32" tubing

Valves and fittings are supplied with the appropriate quantity of nuts and ferrules. However, if additional fittings are required, they may be ordered separately. The two internal nuts include collapsible ferrules as an integral part of the fitting; the external nut must be used with the separate ferrule listed below.

		<i>Prod No</i>	<i>Price each:</i>
	Internal nut with collapsible ferrule <i>For use with:</i> <i>Fittings on pages 60-62</i> <i>6 port valve CN2-4346, page 154</i> <i>4 port internal sampling injector CN4-4344, page 155</i>	C-NNFFPK	\$8.00
	Internal nut with collapsible ferrule <i>For use with:</i> <i>10 port nanovolume valve CN2-4340, page 154</i>	C-NNFLFPK	9.00
	External nut <i>For use with:</i> <i>Unions on page 61</i> <i>Column end fittings on page 62</i> Note: Requires collapsible PEEK ferrule, below	C-EN.5FPKB	4.50
	Collapsible PEEK ferrule <i>For use with:</i> <i>External nut, above</i>	ZGF.5PK	4.50

MORE INFORMATION


360 µm fittings . . . pp 57-58
1/32" Nanovolume
column end fittings . . 62
Tubing
PEEK 88-89
Electroformed
nickel 87

TECH TIP

Use these **collapsible ferrule-nuts** with:
1/32" Nanovolume
fittings pp 60-62
and with injectors:
CN2 154
CN4 155

Plugs

for 1/32" tubing

		<i>Prod No</i>	<i>Price each:</i>
	Internal plug <i>For use with:</i> <i>Fittings on page 60</i> <i>Nanovolume valves on pages 154-155</i>	C-NPFPK	\$9.00

CHEMINERT FITTINGS

Nanovolume Unions, Tees, Y's, and Crosses for 1/32" Tubing

Unions

for 1/32" tubing

	100 µm bore		150 µm bore	
	Prod No	Price	Prod No	Price
Union for 1/32" PEEK or electroformed nickel tubing Does not require or include liners.	C-NEU.5XFPK	\$43	C-NEU.5FPK	\$35



Reducing unions

for 1/32" tubing

	200 µm bore	
	Prod No	Price
Reducing union, 1/32" to 1/16" tubing, natural PEEK	ZERU1.5FPK	\$26



Tees, y's, and crosses

for 1/32" tubing or FS* tubing

		100 µm bore		150 µm bore	
		Prod No	Price	Prod No	Price
Tee	1/32" tubing or fused silica*	C-NTXFPK	\$105	C-NTFPK	\$83
Y	1/32" tubing or fused silica*	C-NYXFPK	105	C-NYFPK	83
Cross	1/32" tubing or fused silica*	C-NXXFPK	120	C-NXFPK	100



*A liner is needed for use with fused silica. Order 27 mm length, page 61.

Fill ports

for 1/32" nanovolume® valves

These fill ports provide direct syringe connections to Model CN2 nanovolume valves. For use with 26 gauge blunt tip needle.

	Prod No	Price
Fill port for 1/32" CN2 series HPLC injectors	C-NVISF	\$13



1/32" Nanovolume frits

These frits are the answer to filtration of 1/32" nanovolume fitting connections. A mere .25 mm (0.010") thin and 1/32" in diameter, they can be placed in any 1/32" fitting detail and add minimal volume. Price is for a package of 5 frits.

Pkg/5:	Pore size	Prod No	Price
	0.2 micron	.2FR.5-5	\$17.50
	0.5 micron	.5FR.5-5	17.50

MORE INFORMATION

Unions for fused silica
... p. 18, 19, 57-58, 61

100 µm	= .004"
150 µm	= .006"
0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm

TECH TIP

Liners adapt nanovolume fittings for use with fused silica tubing. They are included with nanovolume **unions** for fused silica, but must be ordered separately for other fittings.



Liners page 61


Nanovolume Unions and Liners for FS Tubing

Unions

for fused silica tubing



	FS tubing OD	100 µm bore		150 µm bore	
		Prod No	Price	Prod No	Price
Union for fused silica tubing Includes liners.	125 - 175 µm	C-NEU.5XFPK.15	\$54	C-NEU.5FPK.15	\$45
	175 - 225 µm	C-NEU.5XFPK.20	54	C-NEU.5FPK.20	45
	225 - 275 µm	C-NEU.5XFPK.25	54	C-NEU.5FPK.25	45
	275 - 325 µm	C-NEU.5XFPK.30	54	C-NEU.5FPK.30	45
	325 - 375 µm	C-NEU.5XFPK.35	54	C-NEU.5FPK.35	45

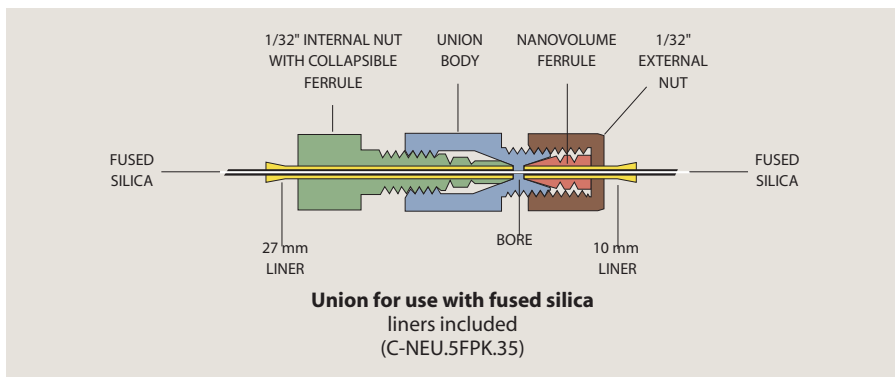

Liners for 1/32" connectors


for use with fused silica tubing

Use these liners with nanovolume connectors to adapt to the most common sizes of fused silica tubing. Natural PEEK.

The 27 mm liners are for internal nuts with collapsible ferrules. 10 mm liners are for use with external nuts. Sold in packages of 5.


27 mm liners

Use with internal nuts C-NNFFPK or C-NNFLFPK

	For tubing OD	Prod No	Price
	125 - 175 µm	C-NL.15L-5	\$22
	175 - 225 µm	C-NL.20L-5	22
	225 - 275 µm	C-NL.25L-5	22
	275 - 325 µm	C-NL.30L-5	22
	325 - 375 µm	C-NL.35L-5	22

10 mm liners

Use with external nut C-EN.5FPKB


	For tubing OD	Prod No	Price
	125 - 175 µm	C-NL.15S-5	\$22
	175 - 225 µm	C-NL.20S-5	22
	225 - 275 µm	C-NL.25S-5	22
	275 - 325 µm	C-NL.30S-5	22
	325 - 375 µm	C-NL.35S-5	22

MORE INFORMATION

360 µm fittings . . . pp 57-58
1/32" nanovolume
Fittings 59-60
External nuts 59
Internal nuts with
collapsible ferrules . 59
Liners for column end
fittings 62


TECH TIP

Use 27 mm liners

 with internal nuts with collapsible ferrules:



Use 10 mm liners


 with external nuts:



Nanovolume Column End Fittings for FS Capillaries

Nanovolume column end fittings include two liners to adapt the 1/32" fitting to fused silica. The 27 mm liner, used inside the internal nut, has a 1 µm 316 stainless steel screen embedded in the PEEK to provide closure for fused silica columns. The 10 mm liner is used with the external nut.

Like other nanovolume fittings, they include our one-piece 1/32" fingertight fittings, with a patented* collapsible ferrule. To avoid potential confusion, all fittings utilizing the Cheminert collapsible ferrule are made of black PEEK. The liners are natural PEEK.




Screen embedded in end of liner for column end fittings

Column end fittings

for 1/32" tubing

Each:	For tubing OD	100 µm bore		150 µm bore	
		Prod No	Price	Prod No	Price
Column end fitting	125 - 175 µm	C-NEF.5XFPK.15S1	\$75	C-NEF.5FPK.15S1	\$63
for fused silica tubing	175 - 225 µm	C-NEF.5XFPK.20S1	75	C-NEF.5FPK.20S1	63
Includes liners	225 - 275 µm	C-NEF.5XFPK.25S1	75	C-NEF.5FPK.25S1	63
	275 - 325 µm	C-NEF.5XFPK.30S1	75	C-NEF.5FPK.30S1	63
	325 - 375 µm	C-NEF.5XFPK.35S1	75	C-NEF.5FPK.35S1	63

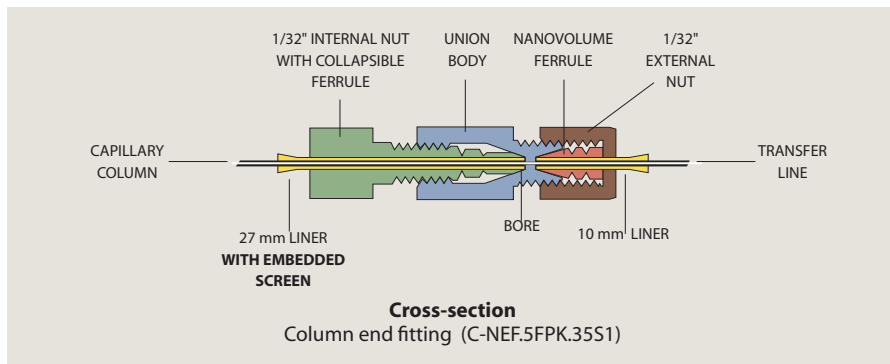


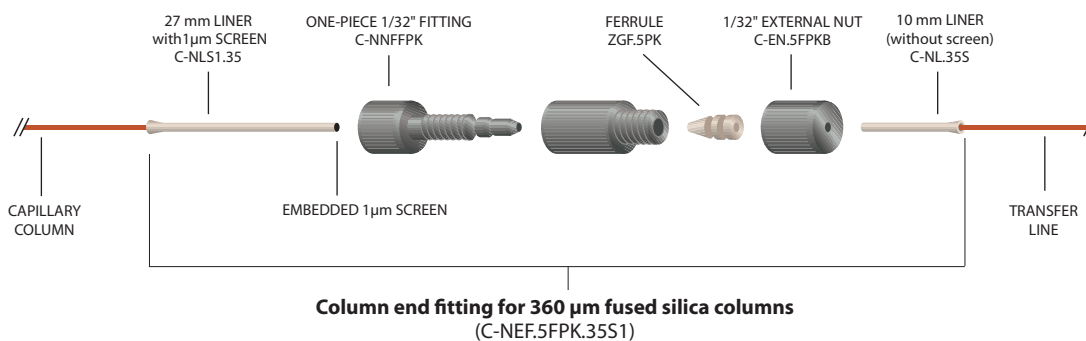
Replacement liners for column end fittings

for FS capillaries

Use these liners with nanovolume column end fittings to adapt to the most common sizes of fused silica tubing. Natural PEEK, with embedded screen to provide full closure for fused silica capillaries. Sold individually.

27 mm liners for column end fittings

	For tubing OD	Prod No	Price
	125 - 175 µm	C-NL S1.15	\$30
	175 - 225 µm	C-NLS1.20	30
	225 - 275 µm	C-NLS1.25	30
	275 - 325 µm	C-NLS1.30	30
	325 - 375 µm	C-NLS1.35	30



*U.S. patent no. 6,575,501.

MORE INFORMATION
Liners for
1/32" fittings .. page 61

TECH TIP
Liners with embedded screens are also available for 1/16" PEEK tubing. Consult the factory for sizes and product numbers.



No twist one-piece fittings

10-32 for 1/16" tubing

These new fittings offer the convenience of a one-piece fitting while solving a problem inherent to such designs. In other one-piece designs, the ferrule rotates against the fitting detail, creating particulates. The no twist design has a separate ferrule that snaps into the nut, so it's attached but still free to avoid rotation during tightening.

Since the ferrule is not machined onto the nut, it can be made from a different material. PEEK nut with PEEK ferrule, or PEEK nut with CTFE ferrule – the possibilities are endless.

Package of 5:		Glass-filled PEEK ferrule		PEEK ferrule		CTFE ferrule	
Nut type	Length	Prod No	Price	Prod No	Price	Prod No	Price
PEEK, hex short		ZNF1PKG-5	\$43	ZNF1PK-5	\$42	ZNF1KF-5	\$42
PEEK, hex medium		MZNF1PKG-5	43	MZNF1PK-5	42	MZNF1KF-5	42
PEEK, hex long		LZNF1PKG-5	45	LZNF1PK-5	44	LZNF1KF-5	44
PEEK, fingertight		ZNF1FPKG-5	45	ZNF1FPK-5	44	ZNF1FKF-5	44

Optional ferrule materials available – FEP, PFA, PTFE, and glass-filled PTFE. Call for availability. Some 1/32" versions are available. Call for details.

Patent No. 7,316,777

Internal nuts – high pressure PEEK

PEEK nuts are used in Cheminert polymeric valves with zero dead volume fittings. They can also be used as alternatives to standard stainless steel Valco nuts when polymeric ferrules are used (up to approximately 175°C). Fingertight nuts have a knurled surface designed to provide sufficient sealing force on the ferrule without wrenches. Hex style nuts allow wrench tightening; however, since they are polymeric, they can break and are recommended for use only when space is limited and fingers won't fit.

Caution: PEEK nuts are intended for use only with polymeric ferrules, which seal with lower force than their stainless steel counterparts. Overtightening can result in breakage.

Package of 10:	Prod no	Price	Length
1/32" fingertight	ZN.5FPK-10	\$33	.42"
1/32" fingertight	LZN.5FPK-10	39	.54"
1/16" fingertight	ZN1FPK-10	33	.88"
1/16" hex	ZN1PK-10	28	.45"
1/16" hex	MZN1PK-10	28	.62"
1/16" hex	LZN1PK-10	33	.87"
1/8" hex	ZN2PK-10	33	.62"



MORE INFORMATION

Tightening tool for hex-head PEEK nuts... 67

POLYMERS AT A GLANCE

PEEKPK
Chemical resistance; up to 225°C

100 µm	= .004"
150 µm	= .006"
0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm

Ferrules – high pressure PEEK

PEEK ferrules seal by the increased friction from compression.

Package of 10:	Prod No	Price	Pkg of 10:	Prod No	Price
1/32"	ZF.5PK-10	\$33	1/4"	ZF4PK-10	35
1/16"	ZF1PK-10	33	3/8"	ZF6PK-10	52
1/8"	ZF2PK-10	33	1/2"	ZF8PK-10	70



Ferrules – grooved PEEK

These patented ferrules* feature a grooved design that permits the ferrule to grip the tube in multiple places. They work great on tubing that is softer than the ferrule material. For example, PEEK grooved ferrules work well on PTFE or FEP tubing. They are not generally recommended if the tubing is the same material as the ferrule.

Package of 10:	Prod No	Price
1/32"	ZGF.5PK-10	\$44
1/16"	ZGF1PK-10	39



High Pressure PEEK Fittings

Plugs and caps – high pressure PEEK

Polymeric plugs and caps are available in knurled fingertight and wrench-tight hex nut designs, for use in valves or fittings. See discussion of PEEK nuts on page 63. PEEK caps include a PEEK nut and ferrule. For high pressure polymeric valve plugs, see below. For low pressure valve plugs, see page 71.



Description	Length of nut*	PEEK plugs		PEEK caps	
		Prod No	Price	Prod No	Price
1/32" fingertight	.42"	ZP.5FPK	\$11	ZC.5FPK	\$13
1/32" fingertight	.54"	LZP.5FPK	11	---	-
1/16" fingertight	.87"	ZP1FPK	10	ZC1FPK	13
1/16" hex	.62"	MZP1PK	10	ZC1PK	12
1/16" long hex	.87"	LZP1PK	10	---	-
1/8" hex	.62"	ZP2PK	13	ZC2PK	13

PEEK plugs for high pressure polymeric valves

These PEEK plugs are for use **only** in Cheminert HPLC polymeric valves (C1-C5 series) since the fitting detail in these valves is unique.

Description	Length of nut*	Prod No	Price
1/16" hex	.62"	C-MZP1PK	\$10
1/16" long hex	.87"	C-LZP1PK	10
1/16" fingertight	.88"	C-ZP1FPK	12



Tees and crosses – high pressure PEEK

Tees connect three lines. Crosses connect four lines. The 1/32" and 1/16" nuts are fingertight; 1/8" nuts are hex, for wrench tightening.

Tubing OD	Bore	PEEK tees		PEEK crosses	
		Prod No	Price	Prod No	Price
1/32"	0.25 mm	ZT.5FPK	\$42	ZX.5FPK	\$52
	0.50 mm	ZT.5LFPK	42	ZX.5LFPK	52
1/16"	0.25 mm	ZT1CFPK	39	ZX1CFPK	50
	0.50 mm	ZT1MFPK	36	ZX1MFPK	46
	0.75 mm	ZT1FPK	33	ZX1FPK	44
	1.00 mm	ZT1LFPK	33	ZX1LFPK	44
1/8"	0.75 mm	ZT2PK	36	ZX2PK	46
	2.00 mm	ZT2LPK	36	ZX2LPK	46



POLYMERS AT A GLANCE

PEEK PK
Chemical resistance;
up to 225°C

TECH TIP




Ferrules for high pressure PEEK fittings are available in PEEK and PFA.

PEEK ferrules page 63
PFA ferrules 13

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

Internal unions – high pressure PEEK


The 1/32" nuts are fingertight; 1/16" nuts are available in a choice of fingertight or hex; and 1/8" nuts are hex, for wrench tightening.

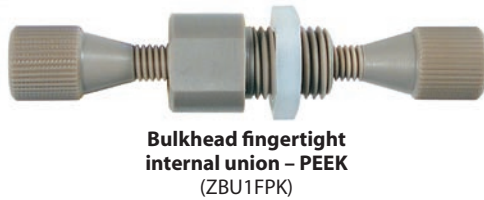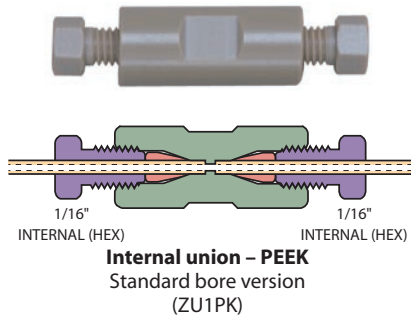

Tubing OD	Bore	Standard		Bulkhead		Bulkhead panel hole diameter
		Prod No	Price	Prod No	Price	
1/32" fingertight						
	0.25 mm	ZU.5FPK	\$26	ZBU.5FPK	\$36	5/16"
	0.50 mm	ZU.5LFPK	26	ZBU.5LFPK	36	5/16"
	1/32"	ZU.5TFPK	26	ZBU.5TFPK	36	5/16"
1/16" fingertight						
	0.25 mm	ZU1CFPK	21	ZBU1CFPK	26	3/8"
	0.50 mm	ZU1MFPK	19	ZBU1MFPK	24	3/8"
	0.75 mm	ZU1FPK	17	ZBU1FPK	22	3/8"
	1/16"	ZU1TFPK	17	ZBU1TFPK	22	3/8"
1/16" hex						
	0.25 mm	ZU1CPK	21	ZBU1CPK	26	3/8"
	0.50 mm	ZU1MPK	19	ZBU1MPK	24	3/8"
	0.75 mm	ZU1PK	17	ZBU1PK	22	3/8"
	1/16"	ZU1TPK	17	ZBU1TPK	22	3/8"
1/8" hex						
	0.75 mm	ZU2PK	20	ZBU2PK	25	7/16"
	2.0 mm	ZU2LPK	20	ZBU2LPK	25	7/16"
	1/8"	ZU2TPK	20	ZBU2TPK	25	7/16"

Internal reducing unions – high pressure PEEK

These unions connect two different sizes of tubing, with zero dead volume internal fittings on each end. In the bulkhead version, the bulkhead nut is on the side with smaller tubing. The 1/32" and 1/16" nuts are fingertight; 1/8" nuts are hex, for wrench tightening. A version with 1/16" and 1/8" hex nuts is also available.

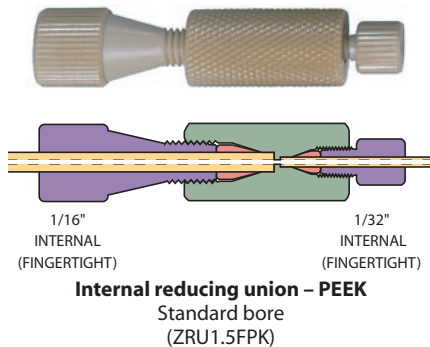

Tubing OD	Bore	Standard		Bulkhead		Bulkhead panel hole diameter
		Prod No	Price	Prod No	Price	
1/16" to 1/32"						
	0.25 mm	ZRU1.5FPK	\$28	ZBRU1.5FPK	\$33	5/16"
	0.50 mm	ZRU1.5LFPK	28	ZBRU1.5LFPK	33	5/16"
	1/32"	ZRU1.5TFPK	28	ZBRU1.5TFPK	33	5/16"
1/8" to 1/32"						
	0.25 mm	ZRU2.5FPK	30	ZBRU2.5FPK	35	3/8"
	0.50 mm	ZRU2.5LFPK	30	ZBRU2.5LFPK	35	3/8"
	1/32"	ZRU2.5TFPK	30	ZBRU2.5TFPK	35	3/8"
1/8" to 1/16"						
	0.25 mm	ZRU21CFPK	26	ZBRU21CFPK	32	3/8"
	0.75 mm	ZRU21FPK	22	ZBRU21FPK	28	3/8"
	1.00 mm	ZRU21LFPK	22	ZBRU21LFPK	28	3/8"
	1/16"	ZRU21TFPK	22	ZBRU21TFPK	28	3/8"

CHEMINERT FITTINGS

High Pressure Specialty PEEK Fittings

One-piece fingertight fittings – color-coded PEEK

These molded fingertight fittings are rated to 5000 psi (350 bar), so they can be used in virtually any HPLC fitting detail with 10-32 threads. Six colors allow easy identification of tubing lines.

Package of 5:

Color	Prod No	Price
Natural	JR-55020-5	\$22
Black	JR-55021-5	22
Red	JR-55022-5	22
Yellow	JR-55023-5	22
Blue	JR-55024-5	22
Green	JR-55025-5	22



One-piece PEEK fingertight fittings – narrow hex-head

This natural PEEK machined fitting has a narrow hex head and 10-32 threads.

Package of 5:

Color	Prod No	Price
Natural	JR-5508-5	\$29.50



Color-It fingertight adapters

Use Color-It snap-on extensions to color-code our 1/4" hex-head nuts, and turn the nut into a fingertight fitting at the same time. Color-It adapters are available in six different colors, and can be used with PEEK and stainless hex-head nuts.

Package of 5:

Color	Prod No	Price
Blue	JR-55010-5	\$3.50
Yellow	JR-55011-5	3.50
Green	JR-55012-5	3.50
Black	JR-55013-5	3.50
White	JR-55014-5	3.50
Red	JR-55015-5	3.50

Package of 12:

Color	Prod No	Price
Multi-color (2 of each color)	JR-55016-12	\$8.00



MORE INFORMATION

Color-coded
PEEK tubing ... page 89

CAUTION

One-piece combination nuts and ferrules are not for high pressure gas service.

0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm



PEEK starter kit


In LC applications involving proteins, peptides, nucleic acids, or other samples of biological origin, metal systems may interact with samples or release transition metals that will deactivate columns. The PEEK starter kit facilitates replacement of stainless steel tubing, fittings, ferrules, mobile phase filters, etc., to create a biocompatible environment for samples and mobile phase.

	<i>Prod No</i>	<i>Price</i>
PEEK starter kit	JR-35P	\$242

Includes:

- 1 Plastic box
- 10 PEEK one-piece fittings, 10-32
- 5 PEEK handtight fittings
- 5 PEEK nuts, hex-head long
- 20 PEEK ferrules, double-ended 1/16"
- 1 PEEK union, HP body only, 10-32
- 2 Tubing elbows 90°
- 2 Tubing elbows 180°
- 1 PEEK filter, in-line,
incl. PAT frit 5 µm
- 1 Clean-cut tubing cutter
- 1 Last Drop PTFE filter 5 µm
- 3m PEEK tubing, 1/16" x 0.25 mm ID,
blue stripe
- 3m PEEK tubing, 1/16" x 0.50 mm ID,
orange stripe
- 1 Tweezers

Tightening tools for PEEK fittings



These handy tools make it fast and easy to tighten PEEK hex-head fittings. The red version is for use with the C360 series fittings shown on page 57. The green tool is for any 1/32" PEEK fitting with a 3/16" hex head nut, and the blue version fits the 1/4" hex common in fittings for 1/16" tubing.

<i>Color</i>	<i>For use with</i>	<i>Prod No</i>	<i>Price</i>
Red	360 µm fittings	C360ET	\$10
Green	1/32" fittings	CNFT	10
Blue	1/16" fittings	ZNFT	9

MORE INFORMATION

- Hex-head PEEK fittings
 - 360 µm page 57
 - 1/32" 63-65
 - 1/16"
 - High pressure . . . 63-65
 - Low pressure 71

Low Pressure Flangeless Tube End Fittings

Cheminert low pressure fittings are ideally suited for flow injection analysis, low pressure liquid chromatography, and stream sampling devices. They may be safely used at pressures up to 500 psi and temperatures to 50°C. Two designs of low pressure tube end fittings are available. *Flangeless* tube end fittings

utilize our new collapsible ferrule, which grips the tubing as the fitting is tightened without significantly reducing the tube ID. *Standard* tube end fittings are retained on polymeric tubing by a flange formed with a Cheminert flanging tool.

Flangeless tube end fittings

1/4-28

Flangeless tube end fittings eliminate the flanging tool required with standard tube end fittings. The nut turns on the tubing as freely as with our flanged fitting, eliminating the possibility of cracking or unscrewing that can occur when plastic tubing is subjected to twisting as fittings are connected.

Cheminert flangeless fittings include our patented* collapsible ferrule design. This innovative design utilizes a one-piece ferrule engineered to collapse as it is tightened. The collapse takes place in a very narrow area, resulting in a very effective seal with virtually no distortion of the tubing ID and no dead volume. The assembly is rated at 500 psi liquid when tightened by hand. Since only the tubing and the ferrule come into contact with the solution, the result is an inert system. Use CTFE ferrules for soft tubing (PTFE, FEP, etc.), but use PEEK ferrules for harder tubing (PEEK, ETFE, polyurethane, etc.)

Cheminert tube end fittings work with any 1/16" or 1/8" OD polymeric tubing, and come in twelve different colors for system color coding.



Flangeless fittings

with CTFE ferrules

(pkg/5)

1/16" OD

Prod No

Price

1/8" OD

Prod No

Price

Black	CFL-1BK	\$11	CFL-2BK	\$11
Blue	CFL-1BE	11	CFL-2BE	11
Brown	CFL-1BR	11	CFL-2BR	11
Dark gray	CFL-1DG	11	CFL-2DG	11
Green	CFL-1G	11	CFL-2G	11
Lavender/pink	CFL-1L	11	CFL-2L	11
Natural	CFL-1N	11	CFL-2N	11
Orange	CFL-1E	11	CFL-2E	11
Purple	CFL-1P	11	CFL-2P	11
Red	CFL-1R	11	CFL-2R	11
White	CFL-1W	11	CFL-2W	11
Yellow	CFL-1Y	11	CFL-2Y	11


Assorted (pkg/12, one of each color)
with ferrule:

CTFE	CFL-1A	22	CFL-2A	22
PEEK	CFL-1A-PK	22	CFL-2A-PK	22

Replacements

PEEK ferrules (pkg/10)	CFL-CB1PK	12	CFL-CB2PK	12
CTFE ferrules (pkg/10)	CFL-CB1KF	12	CFL-CB2KF	12
PEEK nuts (pkg/5)	CFL-1PK	24	CFL-2PK	24

Setting tool	CST	6	CST	6
---------------------	-----	---	-----	---

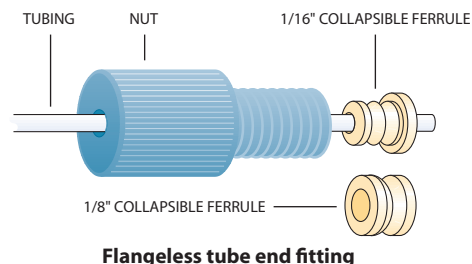

1/8" COLLAPSIBLE FERRULE

Flangeless tube end fitting

0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm

Low Pressure Standard Tube End Fittings and External Nuts




Standard flanged tube end fittings

1/4-28

The basic component of the Cheminert system is the polypropylene nut, retained on PTFE or FEP tubing by a flange formed with a Cheminert flanging tool (page 70). This is an excellent method for connecting fluorocarbon tubing, as there is no reduction of the inside diameter and no binding or twisting of the tubing when the fitting is tightened. A mating of the parts is achieved with zero dead volume, making this an ideal fitting for biological systems.

Cheminert tube end fittings come in twelve different colors for system color coding, and are available for 1/16" or 1/8" OD fluorocarbon tubing. (While in theory other polymers could be molded to form a flange, only fluorocarbons such as PTFE or FEP have low-temperature malleability and good form retention at operating temperatures.) Tube end fittings attach directly to Cheminert valves and fittings, and are easily joined to each other with a union. Tightening by hand is all that is required to make a leak-free seal at 500 psi liquid, although for long term reliability a wrench could be used to apply an additional 1/8 turn.

Packages include the same number of washers as fittings.

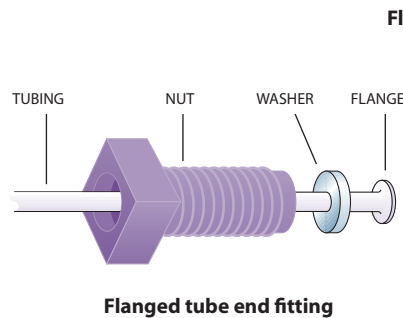

Flanged fittings (pkg/10)	1/16" OD		1/8" OD	
	Prod No	Price	Prod No	Price
Black	CF-1BK	\$13	CF-2BK	\$13
Blue	CF-1BE	13	CF-2BE	13
Brown	CF-1BR	13	CF-2BR	13
Dark gray	CF-1DG	13	CF-2DG	13
Green	CF-1G	13	CF-2G	13
Lavender/pink	CF-1L	13	CF-2L	13
Natural	CF-1N	13	CF-2N	13
Orange	CF-1E	13	CF-2E	13
Purple	CF-1P	13	CF-2P	13
Red	CF-1R	13	CF-2R	13
White	CF-1W	13	CF-2W	13
Yellow	CF-1Y	13	CF-2Y	13
Assorted (pkg/12, one of each color)				
	CF-1A	15	CF-2A	15
Washers (pkg/10)	CF-W1	3	CF-W2	3

MORE INFORMATION

High pressure fittings pp 63-66
PTFE and FEP tubing 90


TECH TIP

To make up standard flanged tube end fittings, use the flanging tool on page 70.

A flanging starter kit, complete with flanging tool, flanging tips, and an array of tubing and fittings, is also available. (See page 70.)

TECH TIP

Use our external nut tube end fittings to make true zero volume butt connections without a coupling.



External nuts for flanged tube ends

1/4-28

External nuts with female 1/4-28 threads are designed for use on tubing with a flanged end, just like the standard tube end fittings. Use them instead of a union or coupling to make a zero volume butt connection.

Package of 5:

Tubing OD	PEEK		CTFE	
	Prod No	Price	Prod No	Price
1/16"	CEN1PK	\$13	CEN1KF	\$13
1/8"	CEN2PK	13	CEN2KF	13




Flanging Tool, Starter Kit

Cheminert flanging tools

The flanging tool makes the flange which retains the standard 1/4-28 tube end fitting and washer on PTFE or FEP tubing. With this tool, lengths of tubing may be easily assembled to any required dimension. The time required is approximately 5 to 10 seconds per flange.

Flanging tools are available for 110 VAC or 230 VAC, and come complete with tips for 0.75 mm, 1.0 mm, and 2.00 mm ID tubing, a tubing holder for gripping the tubing during the flanging operation, a razor blade for tube cutting, and instructions.



Flange being made on tubing

		Prod No	Price
Flanging tools	110 VAC	CFT-110	\$215
	230 VAC	CFT-220	215
Flanging tool accessories			
Flanging tips			
	for tubing ID ≤ 0.25 mm	CFT-TXC	28
	for tubing ID ≤ 0.75 mm	CFT-TC	28
	for tubing ID ≤ 1.00 mm	CFT-TM	28
	for tubing ID ≤ 1.50 mm	CFT-TL	28
	for tubing ID ≤ 2.00 mm	CFT-TXL	28
	Razor blades (pkg /10)	CFT-R	6
	Tubing holder	CFT-H	20



Cheminert starter kits

Starter kits come in either 1/16" or 1/8" versions, with flanging tools for 110 VAC or 230 VAC.

	110 VAC		230 VAC	
	Prod No	Price	Prod No	Price
Starter kits				
1/16" tubing	CFT1K-110	\$330	CFT1K-220	\$330
1/8" tubing	CFT2K-110	330	CFT2K-220	330

The starter kit includes:

- 1 flanging tool with 3 flanging tips
- 1 tubing holder
- 20 standard tube end fittings
- 20 stainless steel washers
- 10 couplings
- 20 feet of PTFE tubing
(1/16" OD x 0.030" ID
or
1/8" OD x .060" ID)
- 1 male luer adapter
- 1 female luer adapter
- 1 plug
- 1 tee
- 1 glass connector



MORE INFORMATION

Standard tube end fittings page 69

Stainless steel washers 69

Couplings 72

Male luer adapter..... 76

Female luer adapter ... 76

Plug..... 71

Tee 74

Glass connector 75

Starter Kit, Low Pressure Plugs and Caps



Easy-Flange kit

The Easy-Flange flange-rolling tool uses mechanical force to form a flange on 1/16" - 1/8" OD PTFE tubing, offering an excellent non-electric alternative to the heated flanging tool.

The quality of the flange is excellent, since it is formed without stressing the tubing by heat. The specially designed negative conical profile of the flange-forming component yields an ideal shape for maximum sealing properties.

	<i>Prod No</i>	<i>Price</i>
Easy-Flange kit	JR-201540	\$170
<i>Includes:</i>		
Plastic box		
Flanging discs with:		
0.5 mm SS pin for PEEK tubing		
0.8 mm polymer pin		
0.8 mm titanium pin		
1.3 mm polymer pin		
1.3 mm titanium pin		
Clean-cut tubing cutter		
PTFE tubing, 1/16" x 0.75 mm ID, 6 ft.		

Plugs

1/4-28

Plugs can be used to close off an unused port in a 1/4-28 valve or manifold.

	PEEK		CTFE	
<i>Package of 5:</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
	CPPK	\$13	CPKF	\$13

Low pressure PEEK plugs

10-32

These all-PEEK plugs are for use in Cheminert PEEK fittings and low pressure polymeric valves (C20Z and C30Z series). For high pressure polymeric valves (C1-C5 series), use plugs on page 64.

	PEEK		PEEK	
<i>Package of 1: Length of nut*</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
1/16" hex	.62"		MZP1PK	\$10
1/16" long hex	.87"		LZP1PK	10
1/16" fingertight	.88"		ZP1FPK	10

Caps

1/4-28


Caps are used to close off lines with 1/4-28 tube end fittings.

	PEEK		CTFE	
<i>Package of 5:</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
	CCPK-5	\$31	CCKF-5	\$31

MORE INFORMATION

Clean-cut tubing
cutter page 90
Tightening tool for
hex-head PEEK nuts. . 67

0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"
1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"
4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"
7.0 mm = .275"
10.0 mm = .400"
27.0 mm = 1.08"
1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm
1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm



CHEMINERT FITTINGS

Low Pressure Unions

Unions *Cheminert to Cheminert* 1/4-28 to 1/4-28

Includes flangeless 1/4-28 fittings for tubing OD indicated. Polypropylene unions are for use with flanged tubing only.


Tubing OD	Bore	PEEK		CTFE		Polypropylene	
		Prod No	Price	Prod No	Price	Prod No	Price
1/16"	0.25 mm	CUCPK	\$23	CUCKF	\$23	-	-
1/16"	0.50 mm	CUPK	20	CUKF	20	-	-
1/16"	0.75 mm	CUMPK	20	CUMKF	20	-	-
1/8"	1.50 mm	CULPK	20	CULKF	20	-	-
1/8"	Butt connection	CUTPK	17	CUTKF	17	CUTPP *	\$9
						(* pkg/5)	



Unions *Cheminert to 1/16" ZDV* 1/4-28 to 10-32

Includes flangeless 1/4-28 and ZDV 10-32 fittings for 1/16" tubing.

Tubing OD	Bore	PEEK		CTFE		316 Stainless	
		Prod No	Price	Prod No	Price	Prod No	Price
1/16"	0.25 mm	CZUCPK	\$23	CZUCKF	\$23	CZUCS6	\$23
1/16"	0.50 mm	CZUPK	20	CZUKF	20	CZUS6	20
1/16"	0.75 mm	CZUMPK	20	CZUMKF	20	CZUMS6	20

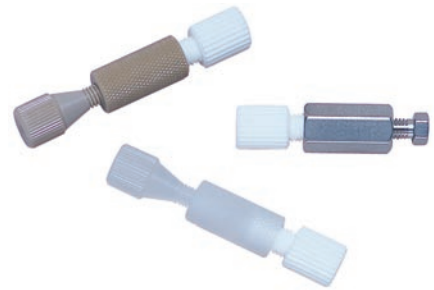

Unions *Cheminert to 1/4" tubing* 1/4-28 to 1/2-20

Includes flangeless 1/4-28 and 1/2-20 fittings.

Tubing OD	Bore	PEEK		CTFE	
		Prod No	Price	Prod No	Price
1/8" to 1/4"	1.50 mm	CU4LPK	\$45	CU4LKF	\$45

Components	Prod No	Price
1/2-20 nut, CTFE	CFL-4KF	\$8
1/2-20 nut, Delrin	CFL-4D	6
CTFE ferrule	CFL-CB4KF-S	5




0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

Low Pressure Bulkhead Unions

Bulkhead unions *Cheminert to Cheminert* *1/4-28 to 1/4-28*

Includes flangeless 1/4-28 fittings for tubing OD indicated.


Tubing		PEEK		CTFE		316 Stainless	
OD	Bore	Prod No	Price	Prod No	Price	Prod No	Price
1/16"	0.25 mm	CBUCPK	\$28	CBUCKF	\$28	CBUCS6	\$23
1/16"	0.50 mm	CBUPK	23	CBUKF	23	CBUS6	20
1/16"	0.75 mm	CBUMPK	23	CBUMKF	23	CBUMS6	20
1/8"	1.50 mm	CBULPK	23	CBULKF	23	CBULS6	20

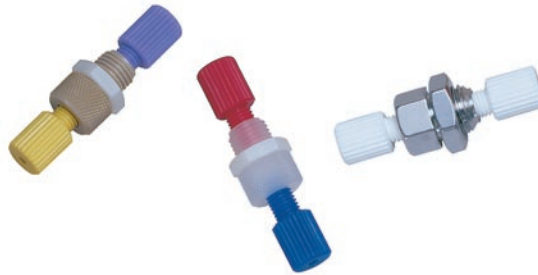

Bulkhead unions *Cheminert to 1/16" ZDV* *1/4-28 to 10-32*

Includes flangeless 1/4-28 and ZDV 10-32 fittings for 1/16" OD tubing.

Tubing		PEEK		CTFE		316 Stainless	
OD	Bore	Prod No	Price	Prod No	Price	Prod No	Price
1/16"	0.25 mm	CZBUCPK	\$28	CZBUCKF	\$28	CZBUCS6	\$23
1/16"	0.50 mm	CZBUPK	23	CZBUKF	23	CZBUS6	20
1/16"	0.75 mm	CZBUMPK	23	CZBUMKF	23	CZBUMS6	20

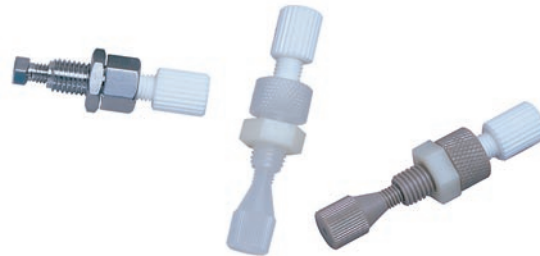

CHEMINERT FITTINGS

Low Pressure Tees, Crosses, and Manifolds

Tees 1/4-28

Includes flangeless 1/4-28 fittings for tubing OD indicated.

Tubing		PEEK		CTFE	
OD	Bore	Prod No	Price	Prod No	Price
1/16"	0.25 mm	CTCPK	\$39	CTCKF	\$39
1/16"	0.50 mm	CTPK	33	CTKF	33
1/16"	0.75 mm	CTMPK	33	CTMKF	33
1/8"	1.50 mm	CTLPK	33	CTLKF	33



Crosses 1/4-28

Includes flangeless 1/4-28 fittings for tubing OD indicated.

Tubing		PEEK		CTFE	
OD	Bore	Prod No	Price	Prod No	Price
1/16"	0.25 mm	CXCPK	\$44	CXCKF	\$44
1/16"	0.50 mm	CXPK	39	CXKF	39
1/16"	0.75 mm	CXMPK	39	CXMKF	39
1/8"	1.50 mm	CXLPK	39	CXLKF	39



Manifolds 1/4-28

Includes flangeless 1/4-28 fittings for tubing OD indicated.

Tubing		PEEK		CTFE	
OD	Bore	Prod No	Price	Prod No	Price
5 ports					
1/16"	0.75 mm	C5M1PK	\$60	C5M1KF	\$60
1/8"	1.50 mm	C5M2PK	60	C5M2KF	60
9 ports					
1/16"	0.75 mm	C9M1PK	88	C9M1KF	88
1/8"	1.50 mm	C9M2PK	88	C9M2KF	88



MORE INFORMATION
Flangeless tube end fittings page 68

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

Mixing Tees and Glass Connectors

Mixing tees

1/4-28



Includes flangeless 1/4-28 fittings for tubing OD indicated.

Tubing OD	Bore	PEEK		CTFE	
		Prod No	Price	Prod No	Price
1/16"	0.75 mm	CM1XPK	\$65	CM1XKF	\$65
1/8"	1.50 mm	CM2XPK	65	CM2XKF	65




Glass connectors

1/4-28 female to 1/4" glass tube

Glass connectors join a Cheminert tube end fitting to 1/4" OD glass tubing. They are available as individual components or as complete assemblies. Assemblies include a bushing and nut, a polypropylene or CTFE split ring, and a 1/4" OD x 3-1/4" long piece of 1 mm or 2 mm ID glass tube. This connector works only with our glass tubes.

Description	Acetal		CTFE	
	Prod No	Price	Prod No	Price
Complete assembly				
1 mm ID glass tubing	CGC41	\$39	CGC41KF	\$44
2 mm ID glass tubing	CGC42	39	CGC42KF	44
Components				
Bushing	CGCB	11	CGCBKF	11
Nut	CGCN	11	CGCNKF	11
Glass rod, 3-1/4" long				
1 mm ID	CGCG41	22	-	-
2 mm ID	CGCG42	22	-	-
Split rings (package of 5)	CGCR	17	CGCRKF	17

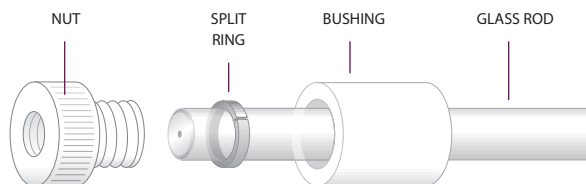

Glass connector

Adapters

Tube adapters

1/4-28

Tube adapters have male 1/4-28 threads going to 1/4" or 1/8" OD tubing.

Tubing		PEEK		CTFE		316 Stainless	
OD	Bore	Prod No	Price	Prod No	Price	Prod No	Price
1/8"	1.5 mm	CTA2PK	\$9	CTA2KF	\$9	CTA2S6	\$8
1/4"	1.5 mm	CTA4PK	8	CTA4KF	8	CTA4S6	7



Luer adapters

Luer to 1/4-28 or 10-32

Luer adapters make a leak-tight connection from male or female luer to 1/4-28 threads.

Description	Bore	PEEK		CTFE		PFA	
		Prod No	Price	Prod No	Price	Prod No	Price
Female luer to 1/4-28	1.50 mm	CFLAPK	\$17	CFLAKF	\$17	CFLAPFA	\$17
to 10-32	0.75 mm	ZUFLPK	22	ZUFLKF	22	-	-
Male luer to 1/4-28	1.50 mm	CMLAPK	17	CMLAKF	17	CMLAPFA	17




Luer adapter bulkhead unions

Luer to 1/4-28 or 10-32

Our luer adapter bulkhead union connects a male or female luer to 1/4-28 or 10-32 fittings. These are the ideal fittings for through-the-panel syringe injections. The 1/4-28 versions include flangeless fittings for 1/16" OD tubing. Versions with 10-32 connections (for 1/16" OD tubing) include a fingertight PEEK nut and a ferrule of the same material as the union.



Description	Bore	PEEK		CTFE	
		Prod No	Price	Prod No	Price
Female luer to 1/4-28	1.50 mm	CBUFLPK	\$26	CBUFLKF	\$26
to 10-32	1.00 mm	ZBUFLPK	24	ZBUFLKF	24
Male luer to 10-32	1.00 mm	ZBUMLPK	24	ZBUMLKF	24

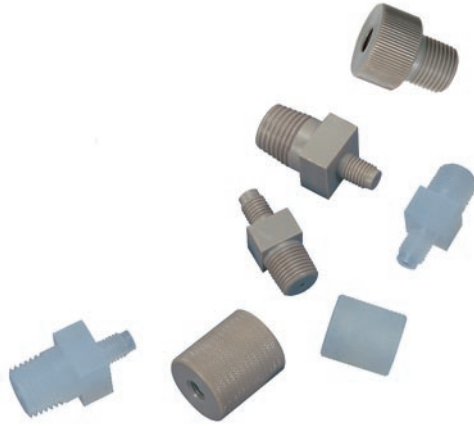

Pipe adapters

1/4-28 to NPT

Versions adapt male or female 1/4-28 fittings to male or female NPT.

NPT	Bore	PEEK		CTFE	
		Prod No	Price	Prod No	Price
Female 1/4-28 to male NPT					
1/8"	1.5 mm	CPA2PK	\$18	CPA2KF	\$18
1/4"	1.5 mm	CPA4PK	18	CPA4KF	18
Male 1/4-28 to male NPT					
1/8"	1.5 mm	CEPA2PK	18	CEPA2KF	18
1/4"	1.5 mm	CEPA4PK	18	CEPA4KF	18
Female 1/4-28 to female NPT					
1/8"	1.5 mm	CFPA2PK	22	CFPA2KF	22
1/4"	1.5 mm	CFPA4PK	22	CFPA4KF	22



NUT NOT INCLUDED

Cheminert 1/4-28 to Valco 10-32 ZDV adapter

This adapter permits Valco 10-32 fittings to be installed into any 1/4-28 fitting detail. (Nut and ferrule are not included.)


Description	Bore	Prod No	Price
Port adapter	0.50 mm	ZLCA1PK	\$22

One-piece fingertight column coupler

Choose from a variety of coupler IDs, indicated by the color of the sleeve (which parallels the color-coding of our PEEK tubing on page 89). A unique feature of this column coupler is that it adapts automatically to fit all pilot lengths – Valco, Waters, Upchurch, Rheodyne, etc. Since the tubing bottoms out in any fitting detail, added void volume is minimal. Material is PEEK.

0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm


Color	Bore	Prod No	Price
Red	0.13 mm ID	JR-26501	\$20
Yellow	0.17 mm ID	JR-26502	20
Blue	0.25 mm ID	JR-26503	20
Orange	0.50 mm ID	JR-26504	20

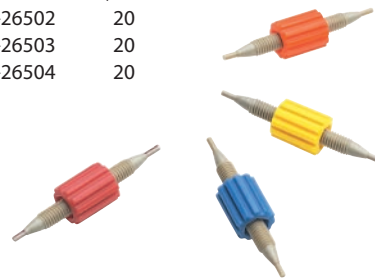

Filters and Perifit Fittings

Perifit fittings for peristaltic pump tubing

The Cheminert Perifit is a unique fitting with a barb on one end and a 1/4-28 female fitting on the other end, for connecting a FIA line with the most commonly used peristaltic tubing. The fitting is compact and easy to install while providing a secure, trouble-free connection. A Perifit can be used as a "stop" on standard inexpensive Tygon® tubing, eliminating the need to buy the more expensive pre-cut tubing with pre-installed stops. Unlike many competitive systems, Perifits are reusable as the tubing wears.

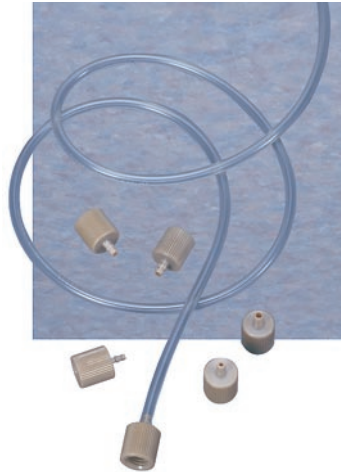

Three sizes of Perifits are available to cover the range of tubing most commonly used in FIA.

For use with tubing sizes	Prod No	Price
0.50 to 1.02 mm ID	C-PFS	\$7
1.12 to 1.65 mm ID	C-PFM	7
1.85 to 2.29 mm ID	C-PFL	8
Kit with 2 of each size above	C-PF	37

In-line filters

1/4-28

These convenient filters can be simply dropped into any 1/4-28 fitting detail. Constructed of PTFE and CTFE, with 316 stainless low-pressure-drop screen. (Fitting shown is not included.)



Pore size	Prod No	Price
2 micron	CFE-S2	\$6
10 micron	CFE-S10	6
75 micron	CFE-S75	6

Biocompatible filter

This all-PEEK filter can be placed in any 1/16" line, providing filtration to 0.5 microns. The filter can be changed without tools, since both the filter housing and the fittings are designed to be hand tightened.

Tubing OD	Bore	Prod No	Price
1/16"	0.5 mm	ZU1FPK.5	\$44



Replacement elements (PEEK-encapsulated titanium)

Pore size	Prod No	Price
0.5 micron	C-F1.5TI	\$5

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

Mobile Phase Filters and Spargers



Last Drop mobile phase filter

The Last Drop mobile phase filter allows more analyses per batch of mobile phase and helps reduce hazardous waste. The flat filter element sits parallel to the bottom of the reservoir, allowing the Last Drop to filter all but the last 2% of the mobile phase from the reservoir without drawing air into the system. Compare this with conventional cylindrical filters that can begin to draw air into the system when nearly 10% of the solvent remains in the reservoir.

The Last Drop mobile phase filter consists of a 316 stainless or PTFE filter element pressed into an inert PTFE housing. The top of the housing has a PEEK tripod which slips into 1.5, 2.2, or 3.5 mm ID pump inlet lines. It will also work with our 1/16" and 1/8" flangeless fittings.

Use the metal-free PTFE version for sensitive biochromatography applications where metal surfaces may corrode or interact with samples.

	<i>Filter element</i>	<i>Prod No</i>	<i>Price</i>
Last drop filter, 2.5µm	PTFE	JR-9000-0520	\$21
	Stainless steel	JR-9000-0530	21



Last Drop filter/spargers

The Last Drop filter/sparger combines filtration and sparging in a single unit. The PTFE housing contains a mobile phase filter with either a stainless steel or a PTFE filter element. The filter/sparger features a PEEK tripod connector for the solvent line, and a nut and ferrule for the sparging line.

	<i>Filter element</i>	<i>Prod No</i>	<i>Price</i>
Last drop filter/sparger 2.5 µm filter, 10 µm sparger	PTFE	JR-9000-0602	\$48.50
	Stainless steel	JR-9000-0640	48.50

Filters

No-Met biocompatible mobile phase filter

Stainless steel in the flowpath is not acceptable in a growing number of applications involving the separation of biomolecules. High salt buffers can corrode stainless steel, and the metal ions released from metallic filters may contaminate or otherwise react with the biomolecules of interest.

The No-Met polyethylene filter is designed for these applications, with inert polymeric fittings and 20 µm filter effectively eliminating metal contamination from the fluid path. Use them for IC and biochromatography applications.

Because they are hydrophobic, No-Met filters may initially require some priming with methanol or acetonitrile. They can be used up to a maximum flow rate of 500 m./min*.



	Prod No	Price
No-met mobile phase filter, 1/8"	JR-32178	\$13
Replacement element	JR-32179	2

* Flow rates measured with methanol/water (1:1), ultrasonically degassed.
Flow rates can vary with solvent and tubing ID.

Stainless steel mobile phase filters and helium spargers

Mobile phase filters protect your HPLC system from small particles in the mobile phase. These filters are made from 316 stainless and PEEK or PTFE, and are suitable for use with most solvents.

Helium spargers offer an inexpensive way to prepare and maintain mobile phases free of dissolved gases. Connect these spargers to a regulated supply of helium gas (0-400 ml/min) to remove dissolved gases from the mobile phase. Spargers are made from 10 micron porosity stainless steel.



Tubing OD	Porosity	Suggested Max. Flow Rate (ml/min)*	Prod No	Price
1/16"	2 µm	35	JR-367016-2	\$14.50
1/16"	10 µm	35	JR-367016-10	14.50
1/16"	20 µm	35	JR-367016-20	14.50
1/8"	2 µm	35	JR-367008-2	14.50
1/8"	10 µm	100	JR-367008-10	14.50
1/8"	20 µm	120	JR-367008-20	14.50


* Flow rates measured with methanol/water (1:1), ultrasonically degassed.
Flow rates can vary with solvent and tubing ID.

Mobile phase filters

Direct connect

Cheminert mobile phase filters provide point-of-use filtering of common HPLC or FIA solvents. They are designed to connect directly to 1/8" OD PTFE or PEEK tubing using a simple press fit. The filter housing is PTFE and includes a 2 or 10 micron titanium frit.

Pore size	Prod No	Price
2 micron	C-MPFTI2	\$20
10 micron	C-MPFTI10	20

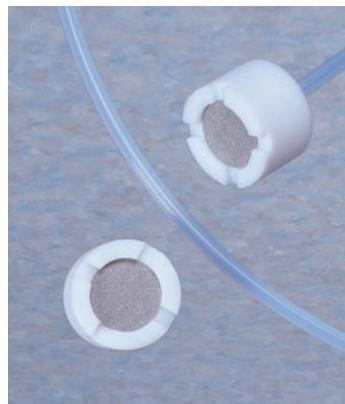

0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"
1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"
4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"
7.0 mm = .275"
10.0 mm = .400"
27.0 mm = 1.08"
1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm
1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm



Mobile phase or solvent reservoirs

1/4-28

These high density polyethylene reservoirs for in-line solvent use come with polypropylene caps, 1/4-28 flangeless fittings, and 1/8" PTFE tubes for one or two lines plus vent. Plugs are included for conversion to solvent storage when the reservoir is removed from the system. Optional PTFE filters with titanium frits are available on the facing page.

Capacity	Cap	Prod No	Price
0.5 liter	2-hole	C-MPR2	\$46
0.5 liter	3-hole	C-MPR3	60
0.5 liter	plain	C-BOT16	7
1.0 liter	plain	C-BOT32	11

VICI-cap



The VICI-cap is the most economical way to helium sparge and deliver HPLC mobile phases. The insert is manufactured from PTFE with an EPDM* O-ring and a polypropylene screw cap.

The VICI-cap is available for either GL45 or S40 threaded bottles. It has a 1/4-28 female port and three ports for tubing insertion: two 1/8" tubing ports and a 1/16" tubing port. The tubing ports are made so that you push the tubing through the hole, while 1/4-28 fittings provide the best connection. Unused ports can be plugged as required.

	Prod No	Price
VICI-cap GL-45	JR-9000-0001	\$26.50
VICI-cap S40	JR-9000-0006	26.50

Valves for vials



The screw-cap Mininert is available in a variety of sizes. The crimp-top valve for 13 mm ID glassware slides into the neck of the vial and features a threaded flange, which is turned to provide a leak-tight fit.

Pkg/12:	Cap/thread size	Prod No	Price
	13 mm-425	PS-614158	\$73
	15 mm-425	PS-614160	75
	18 mm-400	PS-614161	79
	20 mm-400	PS-614170	84
	24 mm-400	PS-614163	88
	Crimp top	PS-614250	99

MORE INFORMATION

Bulkhead connectors . . . page 73
 Flangeless fittings 68
 Plugs 71
 Polymeric tubing 90

TECH TIP

The VICI-cap is not usable for building up a helium atmosphere within the solvent bottle. It is only designed for continuous helium sparging.

*Ethylene Propylene Diene Monomer



Liquid Handling Products

Diluter/Dispensers, M Series

- Full liquid handling functionality
- Self-priming
- No syringes
- Largest volume range available
- Easy to use Wizard format does away with math problems and charts

Cheminert M Series diluter/dispensers simplify the sample preparation process for dispensing and diluting liquids. The user-friendly Wizard format eliminates all the math calculations and charts usually associated with diluting and dispensing applications. Just enter the dilution ratio and the final volume, and the correct volume is calculated and automatically dispensed for each ratio.

For multiple dispenses, you simply enter the volume and the number of dispense repetitions, and the Wizard calculates the total volume to be aspirated. It's that easy!

The diluter/dispenser is built around a patented syringe-free, bi-directional, positive displacement pump. This design approach gives the largest volume range available, and eliminates the inconvenience of having to change and refill syringes.



Additional Features

"Smart" hand probe

The hand probe signals the operator when an aspirate or dispense step is completed. The unique design also allows the use of fixed or disposable probe tips, as well as other accessories.

Program memory

Up to 100 programs can be permanently stored.

Multi-solvent option

A multiposition stream selection valve can be easily integrated with the pump for multi-solvent applications.

Printer option

Print out methods, sequential steps, time/date/operator stamp, titration and tubing volume values.

Patents pending

M10 Diluter/Dispensers

	Prod No	Price
10 nl - 10 ml - M10 diluter/dispenser	CD10-4841-M1A	\$3500

M50 Diluter/Dispensers

	Prod No	Price
50 µl - 50 ml - M50 diluter/dispenser	CD50-8182-M2A	\$3600

Applications

- Simple dispensing of reagents using the manual dispense mode
- Micro dispensing in microplates and genomic arrays
- Dilutions for AA, ICP, GC, and HPLC samples
- Serial dilutions for all samples
- Multi-sample and reagent additions, micro-plates, tube to plate, tube to tube
- Small and large volume dispensing of reagents
- Titrations



Liquid Handling Pumps, M Series

CE

The Cheminert® M Series liquid handling pump* is a syringe-free pump capable of delivering a bidirectional flow over six orders of magnitude.

The M Series is a positive displacement pump, which means that it is self-priming and tolerant of any gas which may find its way into the fluid lines. There is no separate fill cycle, and the capacity is unlimited.

RS-232 and RS-485 communication protocols are incorporated into the microprocessor-driven controller. (USB interface requires an adapter.) The included software package controls flow rates, flow direction, and metered volumes.

Operating principle

At the core of the pump is a polymeric rotor housing four 1/8" diameter pistons in sapphire cylinders. As the microstepper motor turns the rotor, the pistons float on a stationary cam; at any given moment, one piston is filling, one is dispensing, and the other two are in transit between the fill and dispense positions.

M6 pumps

10 nl - 10 ml

	<i>Prod No</i>	<i>Price</i>
M6 pump with:		
Controller and stepper motor	CP2-4841-100M1	\$2740
Stepper motor (no controller)	CP2-4841-100SM	2060
M6 pump only	CP2-4841-100D	1540

M50 pumps

50 µl - 50 ml

	<i>Prod No</i>	<i>Price</i>
M50 pump with:		
Controller and stepper motor	CP3-8182-625M2	\$2920
Stepper motor (no controller)	CP3-8182-625SM2	2230
M50 pump only	CP3-8182-625D	1710

Accessories and replacement parts

	<i>Prod No</i>	<i>Price</i>
Pump motor		
M6	CP-DSM	\$525
M50	CP-DSM2	550
Controller, MicroLynx-4	CP-CM1-P	600

SPECS

	M6	M50
Continuous minimum dispense	100 nl	50 µl
Continuous maximum dispense	5 ml/min	25 ml/min
Maximum back pressure	100 psi	100 psi
Gravimetric precision		
for 125 µl	0.5%	0.8%
for 1.25 ml	0.05%	0.1%
Pump internal volume (µl)	100 ± 2 µl	625 ± 10 µl

Applications

- Flow cytometry, cell and drug perfusion
- HTS and robotic systems
- Infusion and micro-dialysis
- Micro diluters/dispensers for nl to ml range applications
- Micro liquid transfers (nl) for micro arrays
- Microtiter plate dispensing using multiposition valves

* Patent No. 6,079,313

Ultra-High Pressure Injector System

40,000 psi ultra-high pressure injector system


The VICI 40K injector is comprised of six miniature air actuated needle valves, plumbed to simulate the flow path of a conventional rotor/stator injector. An integral controller sends the on/off positioning signals to each valve, coordinating them to perform load, inject, and flush functions. For more information, contact our technical department.

There are three methods for sending positioning commands to the injector:


- Manual control with the pushbuttons on the controller
- Laboratory computer via serial port communication
- Contact closure inputs

Ultra-high pressure injector system

Prod No	Price
SPSS40	\$4000

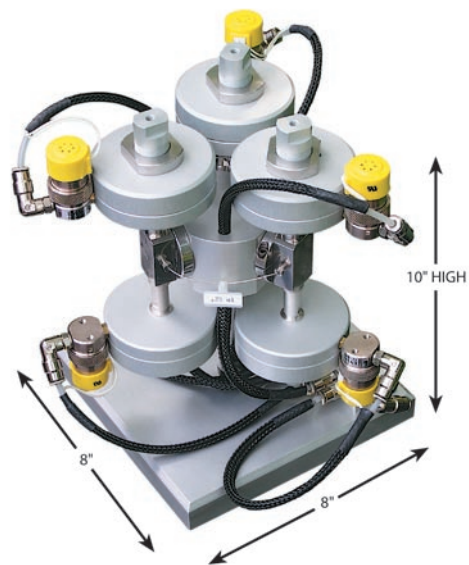


Ultra-high pressure injector system schematic

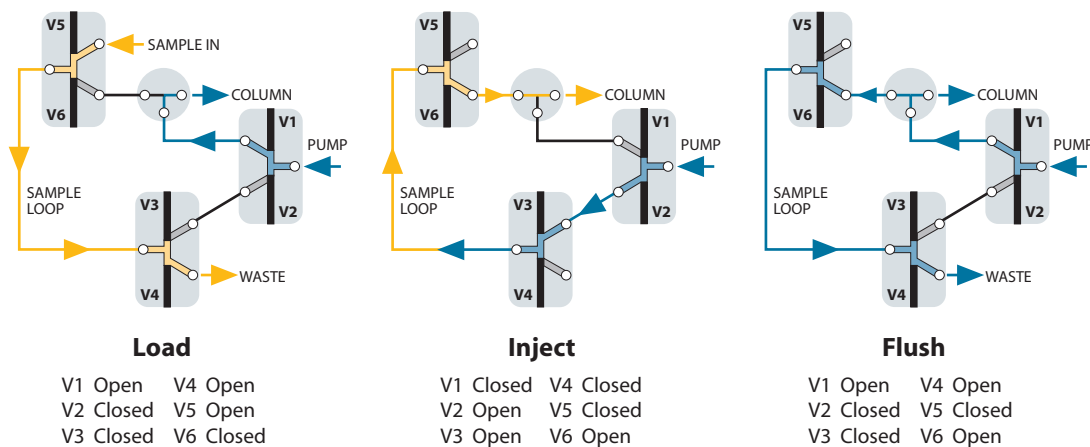


NEW 40,000 psi ultra-high pressure valves

The ultra-high pressure valves that are the heart of our SPSS40 (previous page) are now available individually, in 1/16", 1/32", and 360 micron versions. There are three types – a two port on/off valve, a dual on/off valve, and a 3-way prime/purge valve. (See page 213 for flowpath schematics.) The dual on/off configuration has two individually controlled outlets with a common inlet (or vice versa), emulating a rotary three way valve.

Implementation requires a single three-way solenoid: application of 50 psi opens the valve; venting the air allows the spring to return the valve to the closed position. A fitting for 1/8" air supply tubing is included; two fittings are included for dual valves. (Fitting: prod no EAOR21. See page 219.)

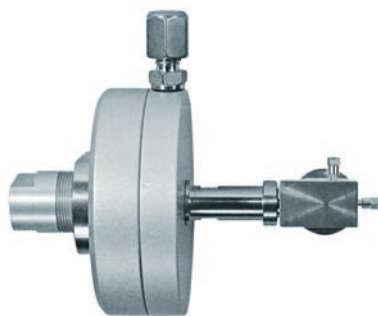

On/off valve
360 µm ZDV fittings

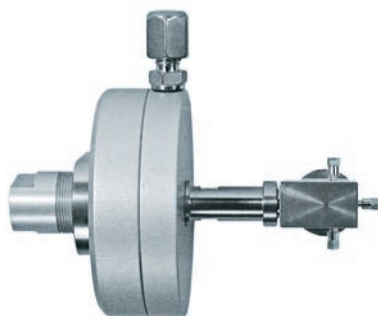

Prime/purge valve
360 µm ZDV fittings

On/off valves


SPECS		Fitting size	Bore	Prod No	Price
Temp	Pressure				
50°C	40,000 psi	360 µm	0.15 mm	ASFVO40K360	\$840
		1/32"	0.15 mm	ASFVO40K.5	760
		1/16"	0.15 mm	ASFVO40K1	715

Prime/purge valves


SPECS		Fitting size	Bore	Prod No	Price
Temp	Pressure				
50°C	40,000 psi	360 µm	0.15 mm	ASFV40K360	\$880
		1/32"	0.15 mm	ASFV40K.5	790
		1/16"	0.15 mm	ASFV40K1	745

Dual on/off valves

SPECS		Fitting size	Bore	Prod No	Price
Temp	Pressure				
50°C	40,000 psi	360 µm	0.15 mm	ASFVOD40K360	\$1460
		1/32"	0.15 mm	ASFVOD40K.5	1340
		1/16"	0.15 mm	ASFVOD40K1	1260

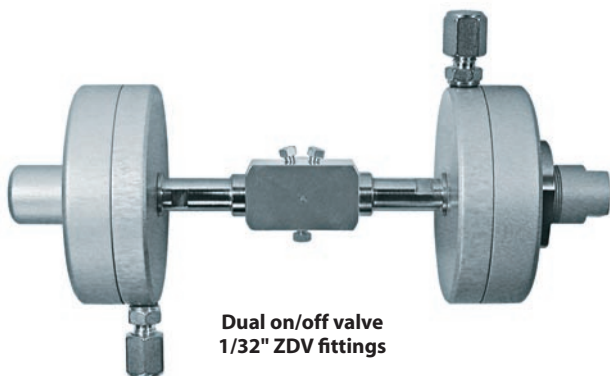


Dual on/off valve
1/32" ZDV fittings

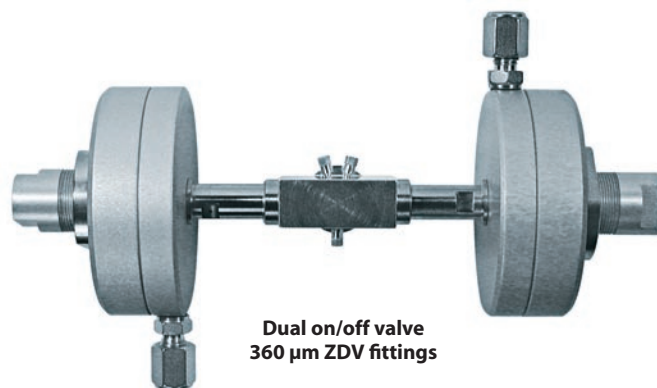

Dual on/off valve
360 µm ZDV fittings

TECH TIP

Three dual on/off valves comprise the ultra-high pressure injector system, SPSS40, on the facing page.

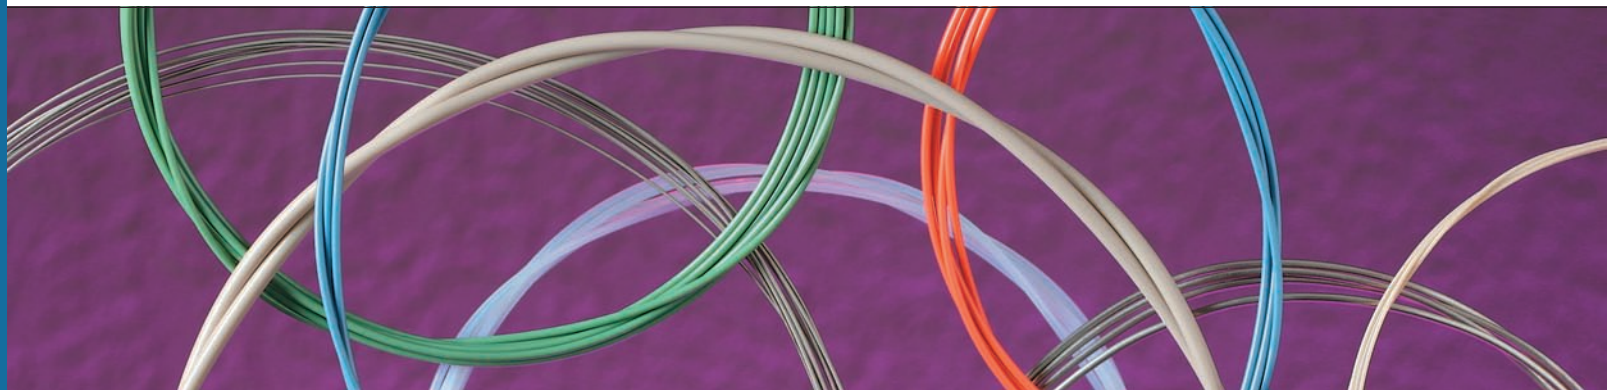

Tubing

We offer chromatography grade tubing in ODs of 360 μm , 1/32", 1/16", and 1/8". Tubing can be ordered in economical pre-cut standard lengths, or can be custom cut to meet your specific instrumentation requirements. All VICI metal tubing is chromatographic grade seamless drawn tubing of the highest available quality. Stainless tubing is 316 series.


Cutting and Cleaning

The improper cutting and cleaning of metal tubing is the largest single cause of chromatographic problems and premature valve failure. The use of our precision cut and finished tubing with VICI fittings and valves maintains the flow uniformity and cleanliness that high performance systems require.

VICI's electrolytic cutting process yields polished tubing with flat ends, minimizing the potential for dead volumes or leaks caused by the uneven ends and burrs left by the tools common in the general laboratory environment – wire cutters, files, jewelers' saws, and most tubing

cutters. These non-precision cutters are likely to generate particulates and deform inner and outer diameters, which can introduce dead volume and flow anomalies.

Each piece of VICI pre-cut metal tubing is specially cleaned with micro-filtered steam from deionized water to remove both organic and inorganic contaminants, representing a major improvement over the common practice of using organic solvents to "clean" tubing. Our test reports have been confirmed by most of the major instrument suppliers: the VICI process provides analytically clean tubing.

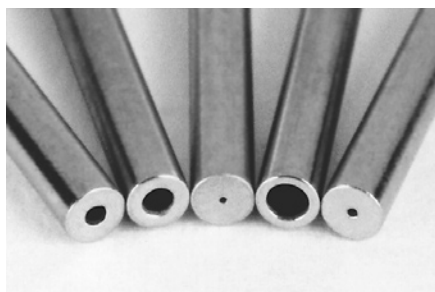

Electrolytically cut and polished



File cut



Plier cut

TECH TIP

Forty years of Valco experience show that the particles left in poorly cut tubing are the number one cause of valve damage.

TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards—OD tolerance should be nominal dimension $\pm .002$ ".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500

Electroformed Nickel Tubing




1/16" OD x .040" ID
1/32" OD x .004" ID
360 µm OD x .001" ID

Three sizes of electroformed nickel tubing


Our microbore EFNi tubing is made by electroplating nickel over a diamond-drawn mandrel in a continuous process. When the mandrel is removed, an internal surface with a mirror-like 1-2 microinch finish remains. The ductile nature of nickel allows the tubing to be easily manipulated. Unlike glass- or silica-lined stainless, EFNi can accept tight bends and cutting without heating, and does not release damaging glass fragments or silica particles.

A comparison of the interiors of commonly used tubing (below) shows the quality of the electroformed nickel tubing surface. (All photos are x500 magnification.) The rough interior surface of the mill-drawn Nickel 200 tubing has potential for carryover or cross contamination, and both the Nickel 200 and the stainless steel contain pits, voids, striations, and particles – problems which intensify as the ID decreases.


Custom IDs/ODs are available upon request.



Electroformed nickel (EFNi)



Nickel 200 alloy



Type 316 stainless steel

PRICING PER FOOT

For pricing purposes, the length is rounded up to the next foot. For example, a 5" piece is charged as one foot; an 18" piece as two feet. The price per foot is based on the length of each piece, not the total quantity ordered. Cutting and cleaning charges are included in the price per foot for EFNi tubing.

- 0.05 mm = .002"
- 0.10 mm = .004"
- 0.12 mm = .005"
- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"

- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

360 µm OD EFNi tubing

Custom lengths

Prices are per foot. See pricing note in box at left.

Tubing ID	Prod No	Max length	1-9 feet	10-24 feet	25-50 feet
.001"	TEFNI.101	1 foot	\$23.00	—	—
.002"	TEFNI.102	2 feet	18.00	—	—
.004"	TEFNI.104	20 feet	15.00	\$14.25	—
.005"	TEFNI.105	30 feet	14.00	13.30	\$12.60
.007"	TEFNI.110	50 feet	12.00	11.40	10.80

1/32" OD EFNi tubing

Custom lengths

Prices are per foot. See pricing note in box at left.

Tubing ID	Prod No	Max length	1-9 feet	10-24 feet	25-50 feet
.002"	TEFNI.502	2 feet	\$20.00	—	—
.004"	TEFNI.504	20 feet	18.00	\$17.10	—
.005"	TEFNI.505	30 feet	18.00	17.10	\$16.20
.007"	TEFNI.507	50 feet	16.00	15.20	14.40
.010"	TEFNI.510	50 feet	14.00	13.30	12.60
.012"	TEFNI.512	50 feet	13.50	12.83	12.15
.015"	TEFNI.515	50 feet	13.00	12.35	11.70
.020"	TEFNI.520	50 feet	10.00	9.50	9.00

1/16" OD EFNi tubing

Custom lengths


Prices are per foot. See pricing note in box at left.

Tubing ID	Prod No	Max length	1-9 feet	10-24 feet	25-50 feet
.020"	TEFNI.120	50 feet	\$16.00	\$15.20	\$14.40
.030"	TEFNI.130	50 feet	14.00	13.30	12.60
.040"	TEFNI.140	50 feet	12.00	11.40	10.80

PEEK Tubing – Natural

PEEK tubing has the strength required to withstand continuous use at HPLC pressure without swelling or bursting, and is not affected by halide salts, high strength buffers, or other aggressive mobile phases that corrode stainless steel. The polymer surface will not leach metal ions into the eluent or extract metal-sensitive components from the sample. Note however that dichloromethane, THF, and DMSO may cause swelling in PEEK, and concentrated nitric and sulphuric acid will attack PEEK.

OD and ID tolerances for our PEEK tubing are $\pm .0005''$ for 360 micron and 1/32" tubing; $\pm .0005''$ for 1/16" tubing with ID up to .010" and $\pm .001''$ for IDs above .010"; and $\pm .003''$ for 1/8".

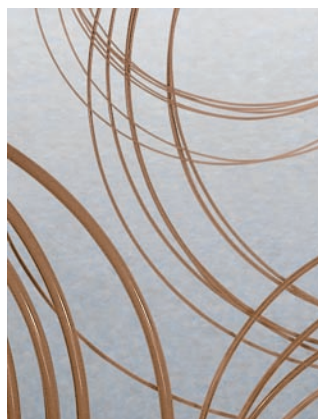

360 µm PEEK tubing

Custom lengths

Custom-length 360 µm PEEK tubing is square-cut and ready to use. Specify the length required, in inches or feet. For pricing of custom length tubing, the length is rounded up to the next foot. For example, a 5" piece is charged as one foot; an 18" piece as two feet.

	.002" ID		.004" ID		.005" ID		.006" ID	
	<i>Prod No</i>	<i>Price/ft</i>	<i>Prod No</i>	<i>Price/ft</i>	<i>Prod No</i>	<i>Price/ft</i>	<i>Prod No</i>	<i>Price/ft</i>
Priced per foot	TPK.102	\$4.50	TPK.104	\$4.50	TPK.105	\$4.50	TPK.106	\$4.50

1/32" OD PEEK tubing

<i>Length</i>	.0025" ID		.005" ID		.010" ID		.015" ID	
	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
10 feet	TPK.502-10FT	\$30	TPK.505-10FT	\$30	TPK.510-10FT	\$26	TPK.515-10FT	\$26
25 feet	TPK.502-25FT	72	TPK.505-25FT	72	TPK.510-25FT	62	TPK.515-25FT	62
100 feet	TPK.502-100FT	280	TPK.505-100FT	280	TPK.510-100FT	240	TPK.515-100FT	240

1/16" OD PEEK tubing

<i>Length</i>	.006" ID		.010" ID		.020" ID		.030" ID	
	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
10 feet	TPK106-10FT	\$30	TPK110-10FT	24	TPK120-10FT	24	TPK130-10FT	24
25 feet	TPK106-25FT	72	TPK110-25FT	60	TPK120-25FT	60	TPK130-25FT	60
100 feet	TPK106-100FT	280	TPK110-100FT	230	TPK120-100FT	230	TPK130-100FT	230

1/8" OD PEEK tubing

<i>Length</i>	.060" ID	
	<i>Prod No</i>	<i>Price</i>
10 feet	TPK260-10FT	\$40
25 feet	TPK260-25FT	95
100 feet	TPK260-100FT	370

MORE INFORMATION

Polymeric tubing
 PTFE page 90
 FEP..... 90
 ETFE..... 90

CUSTOM PEEK TUBING

We offer PEEK tubing custom-manufactured to meet your specific OD, ID, and color requirements. The OD range is .014" (360 micron) to 1/8" with a minimum ID of .002" for tubing up to 1/16" OD. (Maximum ID varies according to the OD.) Color coding can be solid or striped.


PEEK TUBING ELBOWS

Tubing elbows (90° and 180°) are ideal for routing 1/16" PEEK tubing through an LC system. These elbows are proportioned to bend PEEK tubing at the optimum radius for maximum chemical resistance and burst pressure. Installation is simple – just snap the tubing into the elbow.

<i>Package of 5:</i>	<i>Prod No</i>	<i>Price</i>
90° elbow	JR-357090-5	\$8
180° elbow	JR-357180-5	8



PEEK Tubing – Color-coded

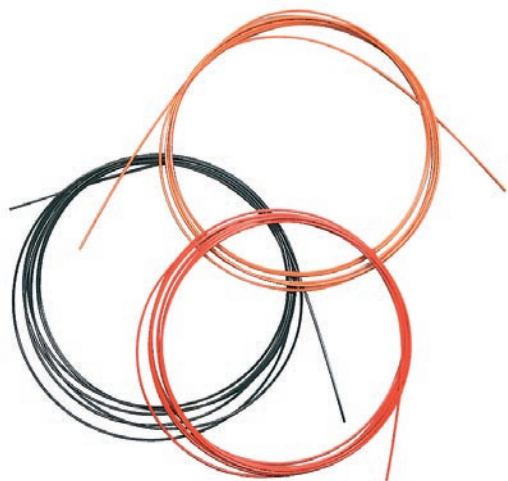


Color-coded tubing helps you identify the ID of your PEEK tubing – each ID is coded with a different color. Use this tubing where maximum chemical resistance and biocompatibility are required.

NEW 1/16" OD dual layer color-coded PEEK tubing *Custom lengths*

Our dual layer PEEK tubing eliminates any concern that a critical sample stream could be contaminated by pigments used to color code the tubing. It looks like any other color-coded tubing at first glance, but a closer look reveals that the pigmented layer* surrounds a separate but integrally-bonded inner layer of natural PEEK.

Tubing ID	Color	bar	psi	Prod No	Price per foot
.004"	Black	460	6700	JR-TD-5804	\$3.50
.005"	Red	420	6100	JR-TD-6007	3.50
.007"	Yellow	400	5800	JR-TD-6008	3.50
.010"	Blue	386	5600	JR-TD-6009	2.50
.020"	Orange	350	4500	JR-TD-6010	2.50
.030"	Green	240	3500	JR-TD-6011	2.50



1/16" OD striped color-coded PEEK tubing *Custom lengths*

A stripe* is added to the outside, so dye never contacts the fluid stream.

Specify the length required, in inches or feet. For pricing custom tubing, the length is rounded up to the next foot. For example, a 5" piece is charged as one foot; an 18" piece as two feet.

Tubing ID	Color	bar	psi	Prod No	Price per foot
.004"	Black	460	6700	JR-T-5804	\$3.50
.005"	Red	420	6100	JR-T-5999	3.50
.007"	Yellow	400	5800	JR-T-6000	3.50
.010"	Blue	386	5600	JR-T-6001	3.50
.020"	Orange	350	4500	JR-T-6002	3.50
.030"	Green	240	3500	JR-T-6003	3.50
.040"	Grey	165	2400	JR-T-60031	3.50

10 ft	=	3.05 m
25 ft	=	7.62 m
100 ft	=	30.48 m


50 µm	=	.002"
100 µm	=	.004"
125 µm	=	.005"
150 µm	=	.006"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

1/16" OD striped color-coded PEEK tubing *Pre-cut kits*

A stripe* is added to the outside, so dye never contacts the fluid stream.

Includes 15 pieces of tubing; 5 each of 5 cm, 10 cm, and 20 cm pre-cut lengths.

Tubing ID	Color	bar	psi	Prod No	Price
.005"	Red	420	6100	JR-T-98013	\$38
.007"	Yellow	400	5800	JR-T-98017	38
.010"	Blue	386	5600	JR-T-98025	35
.020"	Orange	350	4500	JR-T-98050	35
.030"	Green	240	3500	JR-T-98075	35
Super kit, one of each above product number (75 pieces total)				JR-T-98200	145

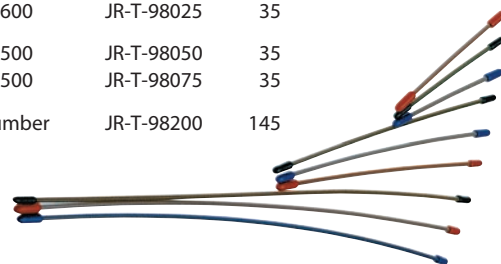


*All colorants used in the manufacture of this tubing are RoHS-compliant (Restriction of Hazardous Substances)

Polymeric Tubing

Polymeric tubing is square cut and ready to use. Each package of polymeric tubing contains one piece of the specified length.

See also PEEK tubing, pages 88-89.

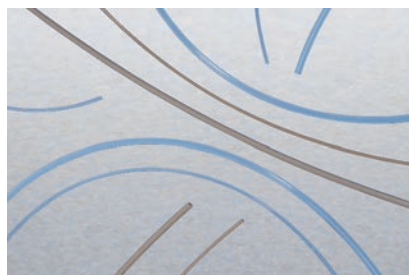

1/16" OD polymeric tubing

	.006" ID		.010" ID		.015" ID		.020" ID		.030" ID	
	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
PTFE										
10 feet	TTF106-10FT	\$15	TTF110-10FT	\$15	TTF115-10FT	\$15	TTF120-10FT	\$15	TTF130-10FT	\$15
25 feet	TTF106-25FT	35	TTF110-25FT	35	TTF115-25FT	35	TTF120-25FT	35	TTF130-25FT	35
100 feet	TTF106-100FT	130	TTF110-100FT	130	TTF115-100FT	130	TTF120-100FT	130	TTF130-100FT	130
FEP										
10 feet	-	-	TFEP110-10FT	16	-	-	TFEP120-10FT	16	TFEP130-10FT	16
25 feet	-	-	TFEP110-25FT	39	-	-	TFEP120-25FT	39	TFEP130-25FT	39
100 feet	-	-	TFEP110-100FT	156	-	-	TFEP120-100FT	156	TFEP130-100FT	156
ETFE										
10 feet	-	-	TTZ110-10FT	25	-	-	TTZ120-10FT	25	TTZ130-10FT	25
25 feet	-	-	TTZ110-25FT	57	-	-	TTZ120-25FT	57	TTZ130-25FT	57
100 feet	-	-	TTZ110-100FT	210	-	-	TTZ120-100FT	210	TTZ130-100FT	210

1/8" OD polymeric tubing

	.030" ID		.060" ID		.085" ID	
	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
PTFE						
10 feet	TTF230-10FT	\$20	TTF260-10FT	\$20	TTF285-10FT	\$20
25 feet	TTF230-25FT	45	TTF260-25FT	45	TTF285-25FT	45
100 feet	TTF230-100FT	170	TTF260-100FT	170	TTF285-100FT	170
FEP						
10 feet	-	-	TFEP260-10FT	20	-	-
25 feet	-	-	TFEP260-25FT	45	-	-
100 feet	-	-	TFEP260-100FT	175	-	-
ETFE						
10 feet	-	-	TTZ260-10FT	35	-	-
25 feet	-	-	TTZ260-25FT	80	-	-
100 feet	-	-	TTZ260-100FT	310	-	-

- Not available



MORE INFORMATION

PEEK tubing
 Natural page 88
 Color-coded 89
 Striped 89

CLEAN-CUT POLYMER TUBING CUTTER

For leak-free tubing connections in an LC system, right angles and clean cuts are essential. The Clean-Cut makes burr-free perpendicular cuts on polymeric tubing without distorting the outside diameter or closing the inside diameter. The handy pocket-sized tool features a unique safety locking mechanism to secure the blade when not in use.

	<i>Prod No</i>	<i>Price</i>
Clean-Cut tubing cutter	JR-797	\$16.50
Replacement blade	JR-798	2.50



TUBING CLIP – THE LC TUBING ORGANIZER

The tubing clip holds 1/16" and 1/8" polymer tubing precisely where you want them in your beakers, flasks, bottles, etc. up to 4 mm wall thickness. The stainless steel spring ensures a long lifetime.

<i>Package of 5:</i>	<i>Prod No</i>	<i>Price</i>
Tubing clip	JR-9001-5	\$12

TUBING POLYMERS

PTFE Inert; very soft, easily cold flows. Produced as Teflon®

FEP Chemically resistant like PTFE, but lower creep and higher friction. More transparent than PTFE.

ETFE Resistant to most chemical attack; some chlorinated solvents will cause tubing to swell. Produced as Tefzel®

10 ft	=	3.05 m
25 ft	=	7.62 m
100 ft	=	30.48 m

Metal Tubing – Bulk Quantities

Bulk metal tubing is not electrolytically cut or cleaned. The annealing process provides tubing which is sufficiently clean for most chromatography applications. (See note below for custom-cleaned tubing.)

Specify the length required, in inches or feet. For pricing of custom length tubing, the length is rounded up to the next foot. For example, a 5" piece is charged as one foot; an 18" piece as two feet. Add \$2 cutting/cleaning charge for each length.

CLEANED CUSTOM LENGTH TUBING

You can order custom length tubing which has been electrolytically cut, deburred, and steam cleaned. Please contact VICI or your local distributor for product numbers and pricing.

The maximum lengths available depends on the ID of the tubing:

Tubing ID	Max length
.005"	3 ft
.007"	5 ft
.010"	10 ft
.020"	20 ft
.026"	40 ft
.030"	50 ft
>.030"	50 ft

Tubing up to 6 feet in length will be supplied straight. Longer tubes will be supplied coiled.

50 µm	=	.002"
100 µm	=	.004"
125 µm	=	.005"
150 µm	=	.006"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"

1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

316 stainless

Bulk quantities

Tubing ID	1/32" OD		1/16" OD		1/8" OD	
	Prod No	Price/ft	Prod No	Price/ft	Prod No	Price/ft
.005"	TSS.505	\$3.25	TSS105	\$3.25	–	–
.007"	TSS.507	3.25	–	–	–	–
.010"	TSS.510	3.25	TSS110	3.25	–	–
.015"	–	–	TSS115	3.25	–	–
.020"	TSS.520	3.25	TSS120	3.25	–	–
.026"	–	–	TSS126	3.25	–	–
.030"	–	–	TSS130	3.25	TSS230	4.50
.040"	–	–	TSS140	3.25	TSS240	4.50
.060"	–	–	–	–	TSS260	4.50
.070"	–	–	–	–	TSS267	4.50
.085"	–	–	–	–	TSS285	4.00

Nickel 200

Bulk quantities

Tubing ID	1/32" OD		1/16" OD		1/8" OD	
	Prod No	Price/ft	Prod No	Price/ft	Prod No	Price/ft
.005"	–	–	TNI105	\$6.00	–	–
.010"	TNI.510	5.00	–	–	–	–
.020"	TNI.520	5.00	TNI120	5.00	–	–
.030"	–	–	TNI130	5.00	–	–
.040"	–	–	TNI140	5.00	–	–
.085"	–	–	–	–	TNI285	\$7.00

Hastelloy C

Bulk quantities

Tubing ID	1/32" OD		1/16" OD		1/8" OD	
	Prod No	Price/ft	Prod No	Price/ft	Prod No	Price/ft
.030"	–	–	THC130	\$14.00	–	–
.070"	–	–	–	–	THC270	\$20.00

Inconel 600

Bulk quantities


Tubing ID	1/32" OD		1/16" OD		1/8" OD	
	Prod No	Price/ft	Prod No	Price/ft	Prod No	Price/ft
.061"	–	–	–	–	TINCO261	\$10
.082"	–	–	–	–	TINCO282	10

– Not normally available

Stainless Steel Tubing – Pre-cut Lengths

These packages of pre-cut Type 316 stainless tubing provide an economical solution to the problems that are caused by “seat-of-the-pants” cutting in the lab or field. They are priced to give a savings over the \$2 per cut charge for custom-cut tubing.

All tubing is electrolytically cut and specially steam-cleaned with micro-filtered steam from deionized water, which removes both organic and inorganic contaminants.

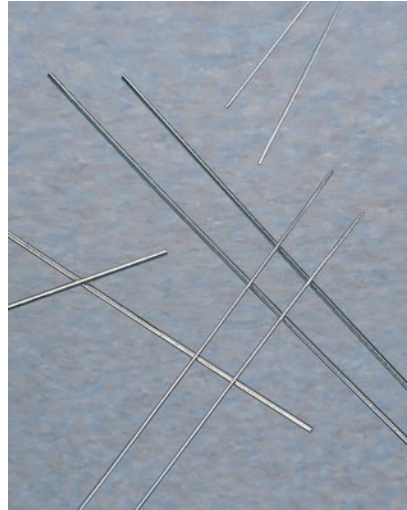

1/32" OD stainless tubing

Pre-cut lengths

Length	.005" ID		.010" ID		.020" ID	
	Prod No	Price	Prod No	Price	Prod No	Price
<i>2 pieces per package</i>						
5 cm	T5N5D	\$9	T5N10D	\$9	T5N20D	\$9
10 cm	T10N5D	10	T10N10D	10	T10N20D	10
20 cm	T20N5D	11	T20N10D	11	T20N20D	11
30 cm	T30N5D	14	T30N10D	14	T30N20D	14
50 cm	T50N5D	16	T50N10D	16	T50N20D	16
100 cm	-	-	T100N10D	25	T100N20D	25
<i>10 pieces per package</i>						
5 cm	T5N5-10	42	T5N10-10	42	T5N20-10	42
10 cm	T10N5-10	46	T10N10-10	46	T10N20-10	46
20 cm	T20N5-10	55	T20N10-10	55	T20N20-10	55
30 cm	T30N5-10	63	T30N10-10	63	T30N20-10	63
50 cm	T50N5-10	75	T50N10-10	75	T50N20-10	75
100 cm	-	-	T100N10-10	115	T100N20-10	115
<i>50 pieces per package</i>						
5 cm	T5N5-50	190	T5N10-50	190	T5N20-50	190
10 cm	T10N5-50	210	T10N10-50	210	T10N20-50	210
20 cm	T20N5-50	270	T20N10-50	270	T20N20-50	270
30 cm	T30N5-50	295	T30N10-50	295	T30N20-50	295
50 cm	T50N5-50	355	T50N10-50	355	T50N20-50	355
100 cm	-	-	T100N10-50	560	T100N20-50	560
<i>100 pieces per package</i>						
5 cm	T5N5-100	360	T5N10-100	360	T5N20-100	360
10 cm	T10N5-100	400	T10N10-100	400	T10N20-100	400
20 cm	T20N5-100	500	T20N10-100	500	T20N20-100	500
30 cm	T30N5-100	540	T30N10-100	540	T30N20-100	540
50 cm	T50N5-100	650	T50N10-100	650	T50N20-100	650
100 cm	-	-	T100N10-100	1070	T100N20-100	1070

TECH TIP

Forty years of Valco experience show that the particles left in poorly cut tubing are the number one cause of valve damage.

5 cm	=	1.97"
10 cm	=	3.94"
20 cm	=	7.87"
30 cm	=	11.82"
50 cm	=	19.68"
100 cm	=	39.37"
0.12 mm	=	.005"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

Stainless Steel Tubing – Pre-Cut Lengths

1/16" OD stainless tubing

Pre-cut lengths

Length	.005" ID		.010" ID		.020" ID		.030" ID		.040" ID	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
<i>2 pieces per package</i>										
5 cm	T5C5D	\$8	T5C10D	\$8	T5C20D	\$8	T5C30D	\$8	T5C40D	\$8
10 cm	T10C5D	9	T10C10D	9	T10C20D	9	T10C30D	9	T10C40D	9
20 cm	T20C5D	10	T20C10D	10	T20C20D	10	T20C30D	10	T20C40D	10
30 cm	T30C5D	12	T30C10D	12	T30C20D	12	T30C30D	12	T30C40D	12
50 cm	T50C5D	14	T50C10D	14	T50C20D	14	T50C30D	14	T50C40D	14
100 cm	-	-	T100C10D	22	T100C20D	22	T100C30D	22	T100C40D	22
<i>10 pieces per package</i>										
5 cm	T5C5-10	38	T5C10-10	38	T5C20-10	38	T5C30-10	38	T5C40-10	38
10 cm	T10C5-10	40	T10C10-10	40	T10C20-10	40	T10C30-10	40	T10C40-10	40
20 cm	T20C5-10	48	T20C10-10	48	T20C20-10	48	T20C30-10	48	T20C40-10	48
30 cm	T30C5-10	55	T30C10-10	55	T30C20-10	55	T30C30-10	55	T30C40-10	55
50 cm	T50C5-10	66	T50C10-10	66	T50C20-10	66	T50C30-10	66	T50C40-10	66
100 cm	-	-	T100C10-10	100	T100C20-10	100	T100C30-10	100	T100C40-10	100
<i>50 pieces per package</i>										
5 cm	T5C5-50	170	T5C10-50	170	T5C20-50	170	T5C30-50	170	T5C40-50	170
10 cm	T10C5-50	190	T10C10-50	190	T10C20-50	190	T10C30-50	190	T10C40-50	190
20 cm	T20C5-50	240	T20C10-50	240	T20C20-50	240	T20C30-50	240	T20C40-50	240
30 cm	T30C5-50	260	T30C10-50	260	T30C20-50	260	T30C30-50	260	T30C40-50	260
50 cm	T50C5-50	300	T50C10-50	300	T50C20-50	300	T50C30-50	300	T50C40-50	300
100 cm	-	-	T100C10-50	490	T100C20-50	490	T100C30-50	490	T100C40-50	490
<i>100 pieces per package</i>										
5 cm	T5C5-100	315	T5C10-100	315	T5C20-100	315	T5C30-100	315	T5C40-100	315
10 cm	T10C5-100	355	T10C10-100	355	T10C20-100	355	T10C30-100	355	T10C40-100	355
20 cm	T20C5-100	440	T20C10-100	440	T20C20-100	440	T20C30-100	440	T20C40-100	440
30 cm	T30C5-100	475	T30C10-100	475	T30C20-100	475	T30C30-100	475	T30C40-100	475
50 cm	T50C5-100	565	T50C10-100	565	T50C20-100	565	T50C30-100	565	T50C40-100	565
100 cm	-	-	T100C10-100	940	T100C20-100	940	T100C30-100	940	T100C40-100	940

CLEANED CUSTOM LENGTH TUBING

You can order custom length tubing which has been electrolytically cut, deburred, and steam cleaned. Please contact VICI or your local distributor for product numbers and pricing.

The maximum lengths available depends on the ID of the tubing:

Tubing ID	Max length
.005"	3 ft
.007"	5 ft
.010"	10 ft
.020"	20 ft
.026"	40 ft
.030"	50 ft
>.030"	50 ft

Tubing up to 6 feet in length will be supplied straight. Longer tubes will be supplied coiled.

VOLUME CHART

Tubing ID	Volume		Tubing ID	Volume	
	µl/cm	µl/in		µl/cm	µl/in
.005"	0.13	0.32	.030"	4.56	11.58
.010"	0.51	1.29	.040"	8.11	20.59
.015"	1.14	2.90	.060"	18.24	46.33
.020"	2.03	5.15	.070"	24.83	63.06
.025"	3.17	8.04	.085"	36.61	92.99

Typical ID tolerances for our tubing are ±.001". This is much tighter than normal commercial grades of tubing; however, it is enough to result in noticeable error if exact volumes are not measured.



Valve Selection

Following is an overview of the many types of valves available from VICI.

Valco Injectors and Valves for GC

pages 96–99, 102–111


For nearly 40 years Valco valves have been the industry standard in gas chromatography. Models are available with 3, 4, 6, 8, 10, 12, or 14 ports, with 1/32", 1/16", 1/8", or 1/4" fittings, and with bore sizes from 0.25 mm (.010") to 4 mm (.156"). In addition, Valco valves offer the widest range of rotor and body materials of any valve available, with alloys and polymer composites capable of meeting virtually any system requirement. All models can be ordered in manual, pneumatic, or electrically actuated versions.



Valco Injectors and Valves for HPLC

pages 96–99, 112–116


A pioneer and industry leader in products for HPLC, Valco continues to offer the market's most diverse line in terms of number of ports, fitting sizes, materials of construction, and actuation. 3, 4, 6, 8, 10, 12 port versions are offered, with 1/32", 1/16", or 1/8" fittings. As with the GC line, Valco valves offer the widest range of rotor and body materials of any valves available, with alloys and polymer composites capable of meeting virtually any system requirement. All models can be ordered in manual, pneumatic, or electrically actuated versions.



Valco Selectors

pages 100–101, 122–133

One inherent benefit of the Valco conical rotary design is that it allows multiple planes of ports, facilitating a variety of unique multiposition configurations useful for stream selection, column selection, or trapping. Versions are available for GC and HPLC applications, with 1/16", 1/8", or 1/4" fittings, with bore sizes from 0.40 to 4.0 mm (.016" to .156"). Selectors are available for up to 16 streams (34 ports), all with Valco's trademark flexibility in terms of actuation and material options.



Diaphragm Valves for GC

pages 140–143

A diaphragm valve consists of plungers and ports arranged in a circular pattern, with the plungers controlled by the reciprocating action of two air actuated pistons. Extremely long lifetime (typically 1,000,000 cycles at ambient temperature; approximately 500,000 cycles at elevated temperatures), very short actuation time (10 milliseconds), minimum internal dead volume, and reliability have made this type of valve very successful in process gas chromatography for both sample injection and column switching. Our miniature version features 1/16" or 1/32" zero dead volume fittings, and is the first to offer a 10 port configuration in addition to the 6 port and internal sample 4 port models.





Cheminert Injectors for Nanovolume® HPLC and UHPLC

pages 146, 152–155

New nanovolume® injectors feature a uniform flowpath as small as 100 microns, with specially designed fittings for 1/32" or 360 micron PEEK, fused silica, or Valco electroformed nickel tubing. Models are rated from 5,000 to 20,000 psi, with most having a proprietary coated stainless stator and high-strength PAEK rotor to ensure long periods of maintenance-free operation.



Cheminert Injectors and Valves for HPLC and UHPLC

pages 147, 156–163

The Cheminert line includes 4, 6, 8, and 10 port versions. The submicroliter injector has an injection volume as small as 10 nanoliters. Valves feature 1/16" zero dead volume fittings, with bore sizes from 0.15 mm (.006") to 0.75 mm (.030"). Most models are available in manual, air, or electrically actuated versions, and some can be ordered with a proprietary coated stainless stator and high-strength PAEK rotor to ensure long periods of maintenance-free operation.



Cheminert Injectors and Valves for Low Pressure Applications

pages 148, 164–167

Cheminert's two position design offers 4, 6, 8, or 10 port configurations. The design features a choice of Valco 1/16" zero dead volume fittings or 1/4-28 Cheminert internal fittings for 1/16" or 1/8" OD tubing. All models are available in manual, air, or electrically actuated versions.



Cheminert Selectors

pages 150-151, 170–177

Choose among 4, 6, 8, 10, 14, 20, 24, or 26 position stream selection valves, in high pressure and low pressure models. A variety of configurations are available with bore sizes from 0.10 mm (.004") for HPLC column selection to 4.6 mm (.180") for applications requiring minimal restriction across the valve. Metal or all-polymeric valves can be ordered, with models available in manual, pneumatic, or electrically actuated versions.



40,000 psi Ultra-High Pressure Injector System

page 84

The VICI 40K injector is comprised of six miniature air actuated needle valves, plumbed to simulate the flow path of a conventional rotor/stator injector. An integral controller sends the on/off positioning signals to each valve, coordinating them to perform load, inject, and flush functions.

FOR OEMs

See our injectors for autosamplers and our new low and high pressure integrated motor/injector and motor/selector assemblies designed specifically to be built into OEM systems.

HPLC pp 178-181
 Low pressure . . . 182-183
 Selectors 184-185






Valco Injectors and Valves

- 1/32", 1/16", 1/8", or 1/4" Valco ZDV fittings
- 3, 4, 6, 8, 10, 12, and 14 port and internal sample two position versions
- Five multiposition flowpath configurations with as many as 16 positions
- A variety of materials for hostile environments and continuous use at elevated temperature
- Can be configured for use at temperatures up to 350°C or pressures up to 10,000 psi

The Valco design lends itself to a unique variety of connecting slots and port arrangements. The rotor is held in place by a preload assembly, which allows rotor replacement without removing loops and tubing and without disengaging the valve from the actuator or mounting bracket.

In addition, the preload assembly ensures that the valve is always reassembled to the factory-set tension.

Two position injector and valve descriptions are on page 99; product numbers and prices begin on page 102. For information on **selectors**, refer to pages 100-101.

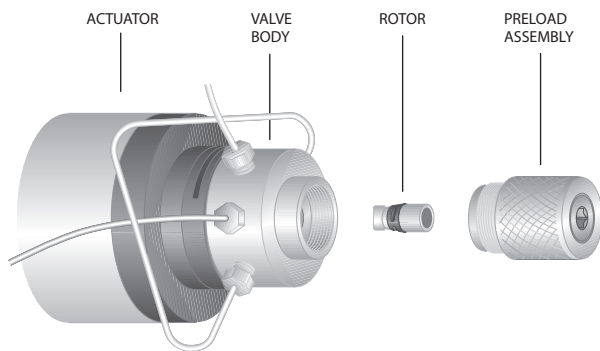

MORE INFORMATION

Decoding Valco valve product no's... 266-269

Valve descriptions

Cheminert injectors 144-149
 Cheminert selectors 144, 150-151
 Diaphragm 140-141
 Valco two position 99
 Valco selectors 100-101

Valco valve prices

GC 102-111
 HPLC 112-116
 Selector 122-133

TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards. The OD tolerance should be nominal dimension $\pm .002$ ".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500

The standard valve body material is Nitronic 60, a gall-resistant stainless steel which has proven superior to Type 316 or 303 in the majority of applications. Valves may also be ordered in Hastelloy C-22, Inconel 600, Type 316 stainless, Monel 400, Nickel 200, Nitronic 50, or Titanium.

Medium temperature GC valves have a rotor made of Valcon E, a polyaryletherketone/PTFE composite. The high temperature versions use a polyimide/PTFE/carbon composite designated Valcon T. Valcon H, a carbon-fiber-reinforced, PTFE-lubricated inert polymer, is standard in HPLC valves.

Appropriate fittings are supplied with all valves. Valves rated at 1000 psi or less have Type 303 stainless ferrules; those rated above 1000 psi have Type 316 stainless ferrules. A valve ordered with an optional body material is supplied with ferrules of the same material as the body, with Type 316 stainless nuts.

**SPECIAL BODY MATERIAL—
CODES AND PRICES**

TWO POSITION VALVES

Body material	Code	1/32" and 1/4" fittings	1/16" and 1/8" fittings
HPLC grade Stainless steel	SS	Standard	Standard
Hastelloy C-22	HC	\$230	\$170
Inconel 600	IN	230	170
Monel 400	M4	290	230
Nickel	NI	400	350
Nitronic 50	N5	125	75
Titanium *	TI	290	230

* Not available for WT, UWT, or T series valves (high temperature) due to material temperature limit.

MULTIPOSITION VALVES

Body material	Code	1/16" and 1/8" fittings SC and SD flowpaths	1/4" fittings SF and ST flowpaths	1/4" fittings SD, SC, SF flowpaths
HPLC grade Stainless steel	SS	Standard, most versions	Standard, most versions	Standard
Hastelloy C-22	HC	\$290	\$350	\$400
Inconel 600	IN	290	350	400
Monel 400	M4	290	350	400
Nickel	NI	580	690	800
Nitronic 50	N5	150	150	—
Titanium *	TI	290	350	400

* Not available for WT, UWT, or T series valves (high temperature) due to material temperature limit.

**Specifying a Special Body
Material**

To specify a special valve body material, add the material code to the end of the valve product number, and add the amount listed in charts opposite to the base price.

Example:

An A4C6WE (air actuated 1/16" 6 port WE valve with a 4" standoff) made of Hastelloy C-22 would be designated A4C6WEHC.

The cost is \$830 + \$170 = \$1000.

Due to design requirements, several special grades of stainless steel may be used where "HPLC grade" is noted. The specific types include Nitronic 60, Type 316 stainless steel, and Type 316L stainless steel. VICI will select the material to be used based on availability and quality. HPLC grade stainless is the standard material for all Valco two position valves and high pressure multiposition valves.

MORE INFORMATION

Materials

- Metals pp 254-255
- Polymers 256
- Valve rotors 257

Leak Testing

The standard test methods for cross-port and outport leakage insure valve performance at pressures and temperatures up to the specifications listed. For valves used on mass spectrometers or for ultra-trace fixed gas analysis, we recommend an optional test method utilizing a helium mass spectrometer, which provides data on mechanical leaks and on those due to seal porosity and permeability. With this method, we can certify leak rates as low as 10^{-10} cc-atm/sec.

Please consult the factory prior to ordering, since the minimum leak rate will vary widely depending on valve configuration.

Leak Rates for Gas Sampling Valves

The actual minimum leak rates attainable vary widely with seal material and valve type. In general, the acceptable leak rates fall into three ranges. (See chart below.)

In order to seal to less than 10^{-7} , the valve loading tension is increased, which somewhat lowers the maximum operating temperature and the valve lifetime. Currently, only select material can seal to 10^{-8} in most valve styles. Valcon M rotor material can seal to 10^{-10} , but has a temperature limit of 50°C.

Not all valves can achieve these leak rates. As a general rule, the larger the valve seal and port size, the higher the leak rate.

Test Method for Liquid Sampling Valves

The standard test method for liquid valves is a pressure drop over time for both crossport and outport leakage, using isopropanol at the specified test pressure. This test is designed to ensure proper performance at the specification limit.

RANGES FOR ACCEPTABLE LEAK RATES

10^{-4} to 10^{-5} cc-atm/sec	Commercial use Not normally sold by VICI
10^{-6} to 10^{-7} cc-atm/sec	General GC use Standard tension and components
10^{-8} to 10^{-10} cc-atm/sec	Ultra trace gas analysis (ppb range) Higher tension and specially processed stator and rotor material

OPTIONAL LEAK TESTING with Helium Mass Spectrometer

To order a valve certified to have helium leak rates less than 10^{-7} cc-atm/sec, add the suffix "Z" to the valve product number and \$175 to the price.

Certified valves are supplied with gold-plated stainless steel ferrules.

We can generally tell you what leak rate is possible prior to manufacturing the valve.

About Two Position Injectors and Switching Valves



Two position injectors and switching valves have many applications, as shown in the section beginning on page 117. In this catalog, Valco two position valves are divided into GC and HPLC sections, with the GC section starting on page 102 and the HPLC section on page 112.

Sample Injectors

Since the most common method of sample injection utilizes a 6 port valve with an external sample loop, 6 port valves are often referred to as "injectors." However, as the Applications section shows, 6 port valves can do more than inject sample, and 8 and 10 port valves can be sample injectors at the same time they're also being backflushers or column switchers. One more variation is the 4 port internal sampling valve (pages 102–103 and 112), which is used when the sample size must be smaller than the smallest available loop. The internal sample "loop" is actually an engraved connecting slot on the rotor which is sized to contain a specified amount of sample.

Sample Loops

Loops are electrolytically cut and electrochemically polished to ensure square, burr-free ends, then cleaned with microfiltered steam from deionized water. Standard material is Type 316 stainless, but loops can be supplied in electroformed nickel, Hastelloy C, Nickel 200, titanium, or several polymers. Consult the factory for availability.

Valco sample loops are accurately sized for each valve type. However, with small volume sloops, the tolerance on the ID of the tubing (± 0.001 ") can have a significant effect on the volume. Therefore, loop volumes and loop appearance may differ from batch to batch.

MORE INFORMATION

Actuation .. pp 186-209

Applications . 117-121

Materials

Metals..... 254-255
 Polymers256
 Valve rotors.....257

Valve descriptions

Cheminert injectors..... 144-149
 Cheminert selectors 144, 150-151
 Diaphragm 140-141
 Valco selectors..... 100-101

Valco valve prices

GC 102-111
 HPLC 112-116
 Selectors 122-133

SPECIFICATIONS

VALCO TWO POSITION VALVES

Valve type	Standard rotor material	Max pressure	Max temp	Max pressure	Max temp
			Internal sample injectors	Sampling and switching valves	
GC					
W and UW	Valcon E	1000 psi liq	175°C	400 psi gas	225°C
	Valcon T	–	–	300 psi gas	330°C
MW	Valcon E2	–	–	100 psi gas	75°C
HPLC					
W and UW	Valcon H	5000 psi liq	75°C	5000 psi liq	75°C

VALVE TYPES

	Fitting size	Standard port diameter
W Type	1/32"	0.25 mm (.010")
	1/16"	0.40 mm (.016")
UW Type	1/16"	0.75 mm (.030")
	1/8"	0.75 mm (.030")
MW Type	1/4"	4.0 mm (.156")

For special port diameters, please consult the factory.

OPTIONAL ROTORS

Valcon M	400 psi	50°C
Valcon P	400 psi	175°C
Valcon R	400 psi	75°C
Valcon TF	200 psi	50°C

See page 257 for a discussion of these optional rotor materials.

About Selectors

Instead of the back and forth switching of two position valves, selectors (multiposition valves) step incrementally through continuous revolutions (bi-directionally with the microelectric actuator). While we can supply older models, all the valves in this catalog have a preload assembly. This design allows the rotor to be inspected or replaced without taking the valve off the actuator, and valves ordered with a microelectric actuator are permanently aligned.

Flowpath Configurations

SD (dead-ended) valves select one of 4 to 16 dead-ended streams, directing it through the valve outlet to a sample valve, pressure sensor, detector, column, etc. The same configuration can also direct one stream to a number of outlets for fraction collection.

SC (common outlet) selectors are similar to SDs, except that instead of being dead-ended the non-selected streams flow to a common outlet.

SF (flow-through) selectors are similar to SDs and SCs, selecting a stream and sending it to the outlet. However, SFs allow the non-selected streams to flow through individual outlets instead of a common outlet.

ST (trapping) selectors are used for multi-column, multi-sample, or multi-trap operations.

STF (trapping/flow-through) selectors are similar to STs, with the single difference being that the non-selected streams are returned to their own vents or sources rather than being dead-ended or trapped as they are in the standard ST configuration.



PORT DIAMETERS—

Low pressure (MW)

Fitting size	No. of Positions	Standard port diameter
SD		
1/16"	4 - 16	0.75 mm (.030")
1/8"	4 - 16	1.0 mm (.040")
1/4"	4 - 10	4.0 mm (.156")

SC

1/16"	4 - 16	1.0 mm (.040")
1/8"	4 - 16	1.0 mm (.040")
1/4"	4 - 8	4.0 mm (.156")

SF

1/16"	4 - 16	1.0 mm (.040")
1/8"	4 - 16	1.0 mm (.040")
1/4"	4 - 8	4.0 mm (.156")

ST

1/16"	4 - 16	0.75 mm (.030")
1/8"	4 - 16	1.0 mm (.040")

STF

1/16"	4 - 16	0.75 mm (.030")
1/8"	4 - 16	1.0 mm (.040")

PORT DIAMETERS—

High pressure (UW)

Fitting size	No. of Positions	Standard port diameter
SD		
1/16"	4 - 12	0.40 mm (.016")
1/8"	4, 6, 8	0.75 mm (.030")
ST		
1/16"	4, 6	0.40 mm (.016")

MORE INFORMATION

Actuation . . pp 186-209

Applications . . 134-139

Materials

Metals 254-255
 Polymers 256
 Valve rotors 257

Specifying a special body material 97

Selector prices

Low pressure
 SD 122-123
 SC 124-125
 SF 126-127
 ST 128-129
 STF 130-131
 High pressure
 SD 132
 ST 133

Loops, if required, are found on corresponding valve pages.

For special port diameters, please consult the factory.

Low Pressure Selectors

Valco **MW Type** selectors are available with 1/16", 1/8", or 1/4" fittings. (For port diameters, refer to the chart on the preceding page.) The 1/16" and 1/8" selectors can be ordered with 4, 6, 8, 10, 12, or 16 positions, in any of the five flowpath configurations. Selectors with 1/4" fittings are available in SD, SC, and SF flowpaths: SDs have 4, 6, 8, or 10 positions; SCs and SFs have 4, 6, or 8.

Although not shown in this catalog, MW selectors are also available in a higher temperature version. While actual specifications vary with the configuration, typical specifications are 200 psi and 330°C. Consult our technical staff for more information.

SPECIFICATIONS

VALCO SELECTORS – **Low pressure** (MW)

Fittings size	Number of positions	Standard rotor material	Max pressure	Max temp	Max pressure	Max temp	Max pressure	Max temp
			SD Dead-end flowpath		SC Common outlet flowpath			
1/16"	4 - 16	Valcon E	400 psi gas	200°C	200 psi gas	200°C	Note: All low pressure 1/16" and 1/8" valves are also available in versions up to 330°C.	
1/8"	4 - 8	Valcon E	400 psi gas	200°C	200 psi gas	200°C		
	10 - 16	Valcon E	200 psi gas	200°C	200 psi gas	200°C		
1/4"	4 - 8	Valcon E2	100 psi gas	75°C	100 psi gas	75°C		
			SF Flow-through flowpath		ST Trapping flowpath		STF Trapping/Flow-through flowpath	
1/16"	4 - 16	Valcon E	200 psi gas	200°C	200 psi gas	200°C	200 psi gas	200°C
1/8"	4 - 16	Valcon E	200 psi gas	200°C	200 psi gas	200°C	200 psi gas	200°C
1/4"	4 - 8	Valcon E2	100 psi gas	75°C	–	–	–	–

High Pressure Selectors

Valco **UW Type** high pressure selectors are available in SD and ST flowpaths. SD selectors with 1/16" fittings are available in 4, 6, 8, 10, or 12 positions, while 1/8" selectors can be

ordered with 4, 6, 8, or 10 positions. ST flowpath UW selectors have 1/16" fittings, with either 4 or 6 positions. (For port diameters, refer to the chart on the preceding page.)

SPECIFICATIONS

VALCO SELECTORS – **High pressure** (UW)

Fittings size	Number of positions	Standard rotor material	Max pressure	Max temp	Max pressure	Max temp
			SD Dead-end flowpath		ST Trapping flowpath	
1/16"	4 - 12	Valcon E	5000 psi liq	75°C	5000 psi liq	75°C
1/8"	4 - 8	Valcon E	5000 psi liq	75°C	–	–

Internal sample injectors, 1/32" fittings, 0.25 mm ports (.010")

W Type

- Med temp
- Internal sample
- 1/32" 0.25 mm

Includes 2" standoff. Manual version is not available without standoff.

Standard electric actuator:
110 VAC for USA;
110/230 VAC to 24 VDC power supply for international

Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply



SPECS
1000 psi liq
175°C max
Nitronic 60 valve body
Valcon E rotor

Sample volume	.06 µl		.1 µl		.2 µl		.5 µl	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual with standoff	2NI4WE.06	\$775	2NI4WE.1	\$775	2NI4WE.2	\$775	2NI4WE.5	\$775
With air actuator	A2NI4WE.06	935	A2NI4WE.1	935	A2NI4WE.2	935	A2NI4WE.5	935
With standard electric actuator	E2NI4WE.06	1255	E2NI4WE.1	1255	E2NI4WE.2	1255	E2NI4WE.5	1255
With microelectric actuator	EP2NI4WE.06	1425	EP2NI4WE.1	1425	EP2NI4WE.2	1425	EP2NI4WE.5	1425
Replacement valve	DNI4WE.06	685	DNI4WE.1	685	DNI4WE.2	685	DNI4WE.5	685
Replacement rotor	SSANI4WE.06	75	SSANI4WE.1	75	SSANI4WE.2	75	SSANI4WE.5	75

OPTIONS

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)

Internal sample injectors, 1/16" fittings, 0.40 mm ports (.016")

W Type

- Med temp
- Internal sample
- 1/16" 0.40 mm

Includes 2" standoff. Manual version has no standoff.

Standard electric actuator:
110 VAC for USA;
110/230 VAC to 24 VDC power supply for international

Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply




SPECS
1000 psi liq
175°C max
Nitronic 60 valve body
Valcon E rotor

Sample volume	.06 µl		.1 µl		.2 µl		.5 µl	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	CI4WE.06	\$620	CI4WE.1	\$620	CI4WE.2	\$620	CI4WE.5	\$620
Manual with standoff	2CI4WE.06	665	2CI4WE.1	665	2CI4WE.2	665	2CI4WE.5	665
With air actuator	A2CI4WE.06	825	A2CI4WE.1	825	A2CI4WE.2	825	A2CI4WE.5	825
With standard electric actuator	E2CI4WE.06	1145	E2CI4WE.1	1145	E2CI4WE.2	1145	E2CI4WE.5	1145
With microelectric actuator	EP2CI4WE.06	1315	EP2CI4WE.1	1315	EP2CI4WE.2	1315	EP2CI4WE.5	1315
Replacement valve	DCI4WE.06	575	DCI4WE.1	575	DCI4WE.2	575	DCI4WE.5	575
Replacement rotor	SSACI4WE.06	75	SSACI4WE.1	75	SSACI4WE.2	75	SSACI4WE.5	75

OPTIONS

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)

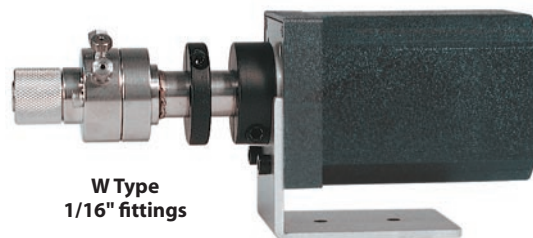

W Type
1/16" fittings

MORE INFORMATION

Actuators

- Air page 195
- Manual 204
- Microelectric .. 188-189
- Standard elec..... 193

Materials

- Metals..... 254-255
- Polymers 256
- Valve rotors..... 257

Standoff assemblies 205

Internal sample injectors, 1/16" fittings, 0.75 mm ports (.030")

UW Type

SPECS
1000 psi liq
175°C max

Nitronic 60 valve body
Valcon E rotor

Includes 2" standoff.
Manual version has no
standoff.

Standard electric actuator:

110 VAC for USA

110/230 VAC to 24 VDC power supply for international

Microelectric actuator:

24 VDC, with 110/230 VAC to 24 VDC power supply



Med temp

Internal sample

1/16" 0.75 mm

OPTIONS

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)

Sample volume

	.2 µl		.5 µl		1 µl		2 µl	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	CI4UWE.2	\$565	CI4UWE.5	\$565	CI4UWE1	\$565	CI4UWE2	\$565
Manual with standoff	2CI4UWE.2	610	2CI4UWE.5	610	2CI4UWE1	610	2CI4UWE2	610
With air actuator	A2CI4UWE.2	770	A2CI4UWE.5	770	A2CI4UWE1	770	A2CI4UWE2	770
With std electric actuator	E2CI4UWE.2	1090	E2CI4UWE.5	1090	E2CI4UWE1	1090	E2CI4UWE2	1090
With microelectric actuator	ED2CI4UWE.2	1320	ED2CI4UWE.5	1320	ED2CI4UWE1	1320	ED2CI4UWE2	1320
Replacement valve	DCI4UWE.2	520	DCI4UWE.5	520	DCI4UWE1	520	DCI4UWE2	520
Replacement rotor	SSACI4UWE.2	75	SSACI4UWE.5	75	SSACI4UWE1	75	SSACI4UWE2	75

Internal sample injectors, 1/8" fittings, 0.75 mm ports (.030")

UW Type

SPECS
1000 psi liq
175°C max

Nitronic 60 valve body
Valcon E rotor

Includes 2" standoff.
Manual version has no
standoff.

Standard electric actuator:

110 VAC for USA

110/230 VAC to 24 VDC power supply for international

Microelectric actuator:

24 VDC, with 110/230 VAC to 24 VDC power supply



Med temp

Internal sample


1/8" 0.75 mm

OPTIONS

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)

Sample volume

	.2 µl		.5 µl		1 µl		2 µl	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	I4UWE.2	\$565	I4UWE.5	\$565	I4UWE1	\$565	I4UWE2	\$565
Manual with standoff	2I4UWE.2	610	2I4UWE.5	610	2I4UWE1	610	2I4UWE2	610
With air actuator	A2I4UWE.2	770	A2I4UWE.5	770	A2I4UWE1	770	A2I4UWE2	770
With std electric actuator	E2I4UWE.2	1090	E2I4UWE.5	1090	E2I4UWE1	1090	E2I4UWE2	1090
With microelectric actuator	ED2I4UWE.2	1320	ED2I4UWE.5	1320	ED2I4UWE1	1320	ED2I4UWE2	1320
Replacement valve	DI4UWE.2	520	DI4UWE.5	520	DI4UWE1	520	DI4UWE2	520
Replacement rotor	SSAI4UWE.2	75	SSAI4UWE.5	75	SSAI4UWE1	75	SSAI4UWE2	75

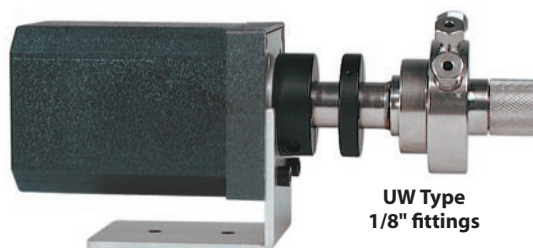

UW Type
1/8" fittings

Capillary GC

Sampling and switching valves, 1/32" fittings, 0.25 mm ports (.010")

W Type

Med temp
1/32" 0.25 mm

Includes 4" standoff.
Manual version not available without standoff.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply

Sample loops are not included with valves.
Order separately.

SPECS

400 psi gas
225°C max
Nitronic 60 valve body
Valcon E rotor

For 300 psi, 350°C max, see facing page.



4 Ports

Prod No Price



6 Ports

Prod No Price



8 Ports

Prod No Price




10 Ports

Prod No Price

Manual with standoff	4N4WE	\$725	4N6WE	\$780	4N8WE	\$835	4N10WE	\$835
With air actuator	A4N4WE	885	A4N6WE	940	A4N8WE	995	A4N10WE	995
With standard electric actuator	E4N4WE	1205	E4N6WE	1260	E4N8WE	1315	E4N10WE	1315
With microelectric actuator	EH4N4WE	1375	EH4N6WE	1430	EH4N8WE	1485	EH4N10WE	1485
Replacement valve	DN4WE	635	DN6WE	690	DN8WE	745	DN10WE	745
Replacement rotor	SSAN4WE	75	SSAN6WE	75	SSAN8WE	75	SSAN10WE	75

OPTIONS

- 3 and 12 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)

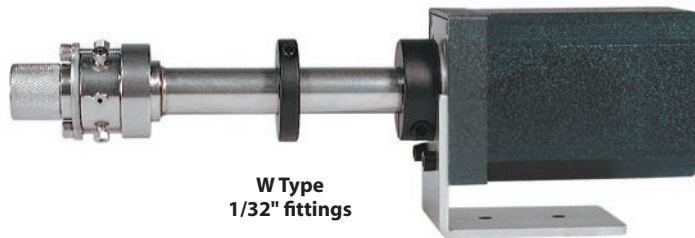

W Type
1/32" fittings

1/32" Stainless steel loops for W Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Price	Volume	Prod No	Price
2 µl	SL2NW	\$25.00	25 µl	SL25NW	\$25.00
5 µl	SL5NW	25.00	50 µl	SL50NW	27.50
10 µl	SL10NW	25.00	100 µl	SL100NW	27.50
15 µl	SL15NW	25.00	250 µl	SL250NW	31.25
20 µl	SL20NW	25.00	500 µl	SL500NW	37.50

MORE INFORMATION

Actuators

- Air page 195
- Manual 204
- Microelectric .. 188-189
- Standard elec. 193

Materials

- Metals 254-255
- Polymers 256
- Valve rotors 257

Standoff assemblies 205

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Nickel 200, PEEK, and PTFE

Sampling and switching valves, 1/32" fittings, 0.25 mm ports (.010")

W Type

SPECS

300 psi gas
350°C max

Nitronic 60 valve body
Valcon T rotor

For 400 psi, 225°C max,
see facing page

Includes 4" standoff.
Manual version not
available without
standoff.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for
international

Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply

Sample loops are not
included with valves.
Order separately.

High temp

1/32" 0.25 mm

OPTIONS

- 3 and 12 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)



4 Ports

Prod No Price



6 Ports

Prod No Price



8 Ports

Prod No Price



10 Ports

Prod No Price

Manual with standoff
With air actuator

4N4WT \$725
A4N4WT 885

4N6WT \$780
A4N6WT 940

4N8WT \$835
A4N8WT 995

4N10WT \$835
A4N10WT 995

With standard electric actuator
With microelectric actuator

E4N4WT 1205
EH4N4WT 1375

E4N6WT 1260
EH4N6WT 1430

E4N8WT 1315
EH4N8WT 1485

E4N10WT 1315
EH4N10WT 1485


Replacement valve
Replacement rotor

DN4WT 635
SSAN4WT 75

DN6WT 690
SSAN6WT 75

DN8WT 745
SSAN8WT 75

DN10WT 745
SSAN10WT 75

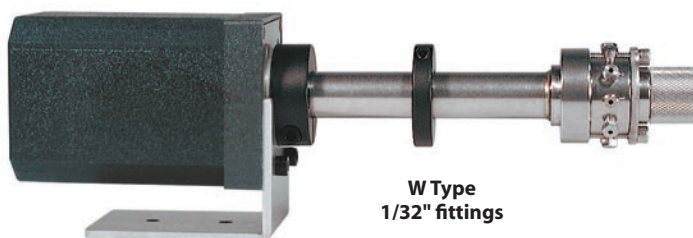

W Type
1/32" fittings

1/32" Stainless steel loops

for W Type valves

Each stainless steel loop includes two stainless
nuts and two stainless ferrules. Order special
fittings separately.



Volume	Prod No	Price	Volume	Prod No	Price
2 µl	SL2NW	\$25.00	25 µl	SL25NW	\$25.00
5 µl	SL5NW	25.00	50 µl	SL50NW	27.50
10 µl	SL10NW	25.00	100 µl	SL100NW	27.50
15 µl	SL15NW	25.00	250 µl	SL250NW	31.25
20 µl	SL20NW	25.00	500 µl	SL500NW	37.50

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Nickel 200, PEEK, and PTFE

Sampling and switching valves, 1/16" fittings, 0.40 mm (.016")

W Type

Med temp
1/16" 0.40 mm

Includes 4" standoff
Manual version has no
standoff

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply
for international
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply

Sample loops are not
included with valves.
Order separately.

SPECS

400 psi gas
225°C max
Nitronic 60 valve body
Valcon E rotor

For 300 psi, 350°C max,
see page 108.



4 Ports

Prod No Price



6 Ports

Prod No Price



8 Ports

Prod No Price




10 Ports

Prod No Price

Manual	C4WE	\$570	C6WE	\$625	C8WE	\$680	C10WE	\$680
Manual with standoff	4C4WE	615	4C6WE	670	4C8WE	725	4C10WE	725
With air actuator	A4C4WE	775	A4C6WE	830	A4C8WE	885	A4C10WE	885
With standard electric actuator	E4C4WE	1095	E4C6WE	1150	E4C8WE	1205	E4C10WE	1205
With microelectric actuator	EH4C4WE	1265	EH4C6WE	1320	EH4C8WE	1375	EH4C10WE	1375
Replacement valve	DC4WE	525	DC6WE	580	DC8WE	635	DC10WE	635
Replacement rotor	SSAC4WE	75	SSAC6WE	75	SSAC8WE	75	SSAC10WE	75

OPTIONS

- 3 and 12 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)

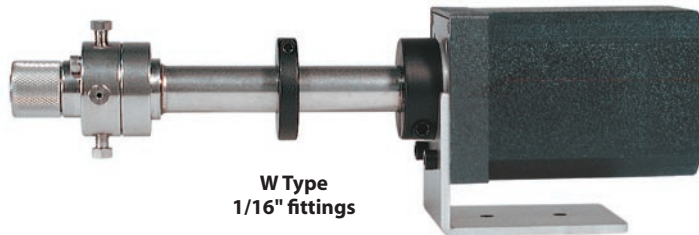

W Type
1/16" fittings

1/16" Stainless steel loops for W Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Price	Volume	Prod No	Price
2 µl	SL2CW	\$22.50	100 µl	SL100CW	\$22.50
5 µl	SL5CW	22.50	250 µl	SL250CW	27.50
10 µl	SL10CW	22.50	500 µl	SL500CW	31.25
15 µl	SL15CW	22.50	1 ml	SL1KCW	35.00
20 µl	SL20CW	22.50	2 ml	SL2KCW	45.00
25 µl	SL25CW	22.50	5 ml	SL5KCW	52.50
50 µl	SL50CW	22.50	10 ml	SL10KCW	68.75

MORE INFORMATION

Actuators
Air page 195
Manual 204
Microelectric .. 188-189
Standard elec..... 193
Materials
Metals 254-255
Polymers 256
Valve rotors..... 257
Standoff
assemblies 205

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

Sampling and switching valves, 1/16" fittings, 0.75 mm ports (.030")

UW Type

SPECS

**400 psi gas
225°C max**

Nitronic 60 valve body
Valcon E rotor

For 300 psi, 330°C max,
see page 109.

Includes 4" standoff.
Manual version has no
standoff.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply
for international
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply

Sample loops are not
included with valves.
Order separately.

Med temp

1/16" 0.75 mm

OPTIONS

- 3, 12 and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
- Larger bore available



4 Ports

Prod No Price



6 Ports

Prod No Price



8 Ports


Prod No Price



10 Ports

Prod No Price

Manual	C4UWE	\$515	C6UWE	\$570	C8UWE	\$625	C10UWE	\$625
Manual with standoff	4C4UWE	560	4C6UWE	615	4C8UWE	670	4C10UWE	670
With air actuator	A4C4UWE	720	A4C6UWE	775	A4C8UWE	830	A4C10UWE	830
With standard electric actuator	E4C4UWE	1040	E4C6UWE	1095	E4C8UWE	1150	E4C10UWE	1150
With microelectric actuator	ED4C4UWE	1270	ED4C6UWE	1325	ED4C8UWE	1380	ED4C10UWE	1380
Replacement valve	DC4UWE	470	DC6UWE	525	DC8UWE	580	DC10UWE	580
Replacement rotor	SSAC4UWE	75	SSAC6UWE	75	SSAC8UWE	75	SSAC10UWE	75

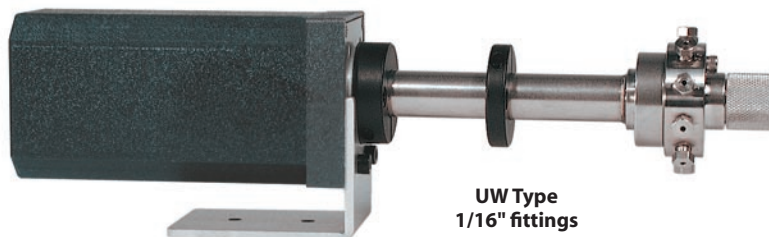

**UW Type
1/16" fittings**

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

1/16" Stainless steel loops

for UW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Price	Volume	Prod No	Price
5 µl	SL5CUW	\$22.50	100 µl	SL100CUW	\$22.50
10 µl	SL10CUW	22.50	250 µl	SL250CUW	27.50
15 µl	SL15CUW	22.50	500 µl	SL500CUW	31.25
20 µl	SL20CUW	22.50	1 ml	SL1KCUW	35.00
25 µl	SL25CUW	22.50	2 ml	SL2KCUW	45.00
50 µl	SL50CUW	22.50	5 ml	SL5KCUW	52.50
			10 ml	SL10KCUW	68.75

High Temperature GC

Sampling and switching valves, 1/16" fittings, 0.40 mm ports (.016")

W Type

High temp
1/16" 0.40 mm

Includes 4" standoff

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply
for international
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply

Sample loops are not
included with valves.
Order separately.

SPECS

300 psi gas
350°C max
Nitronic 60 valve body
Valcon T rotor

For 400 psi, 225°C max,
see page 106.



4 Ports

Prod No Price



6 Ports

Prod No Price



8 Ports

Prod No Price



10 Ports

Prod No Price

Manual with standoff
With air actuator

4C4WT \$615
A4C4WT 775

4C6WT \$670
A4C6WT 830

4C8WT \$725
A4C8WT 885

4C10WT \$725
A4C10WT 885

With standard electric actuator
With microelectric actuator

E4C4WT 1095
EH4C4WT 1265

E4C6WT 1150
EH4C6WT 1320

E4C8WT 1205
EH4C8WT 1375

E4C10WT 1205
EH4C10WT 1375

Replacement valve
Replacement rotor

DC4WT 525
SSAC4WT 75


DC6WT 580
SSAC6WT 75

DC8WT 635
SSAC8WT 75

DC10WT 635
SSAC10WT 75

OPTIONS

- 3 and 12 port valves available
UW type: 3, 12, and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)

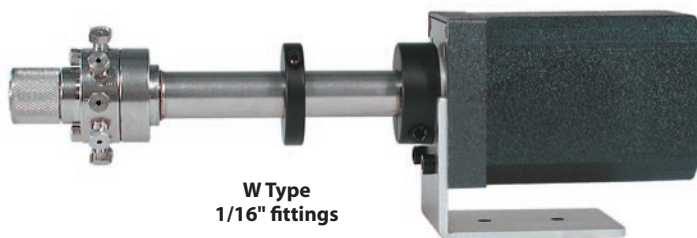

W Type
1/16" fittings

1/16" Stainless steel loops

for W Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Price	Volume	Prod No	Price
2 µl	SL2CW	\$22.50	100 µl	SL100CW	\$22.50
5 µl	SL5CW	22.50	250 µl	SL250CW	27.50
10 µl	SL10CW	22.50	500 µl	SL500CW	31.25
15 µl	SL15CW	22.50	1 ml	SL1KCW	35.00
20 µl	SL20CW	22.50	2 ml	SL2KCW	45.00
25 µl	SL25CW	22.50	5 ml	SL5KCW	52.50
50 µl	SL50CW	22.50	10 ml	SL10KCW	68.75

MORE INFORMATION

Actuators	
Air	page 195
Manual	204
Microelectric	188-189
Standard elec.	193
Materials	
Metals	254-255
Polymers	256
Valve rotors	257
Standoff assemblies	205

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

Sampling and switching valves, 1/16" fittings, 0.75 mm ports (.030")

UW Type

SPECS

300 psi gas
330°C max

Nitronic 60 valve body
Valcon T rotor

For 400 psi, 225°C max,
see page 107.

Includes 4" standoff

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for
international
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply

Sample loops are not
included with valves.
Order separately.

High temp

1/16" 0.75 mm

OPTIONS

- 3, 12 and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
- Larger bore available



4 Ports

Prod No Price



6 Ports

Prod No Price



8 Ports

Prod No Price



10 Ports

Prod No Price

Manual with standoff
With air actuator

4C4UWT \$560
A4C4UWT 720

4C6UWT \$615
A4C6UWT 775

4C8UWT \$670
A4C8UWT 830

4C10UWT \$670
A4C10UWT 830

With standard electric actuator
With microelectric actuator

E4C4UWT 1040
ED4C4UWT 1270

E4C6UWT 1095
ED4C6UWT 1325

E4C8UWT 1150
ED4C8UWT 1380

E4C10UWT 1150
ED4C10UWT 1380


Replacement valve
Replacement rotor

DC4UWT 470
SSAC4UWT 75

DC6UWT 525
SSAC6UWT 75

DC8UWT 580
SSAC8UWT 75

DC10UWT 580
SSAC10UWT 75

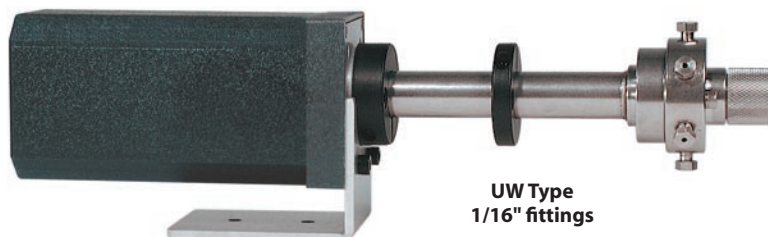

UW Type
1/16" fittings

1/16" Stainless steel loops for UW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Price	Volume	Prod No	Price
5 µl	SL5CUW	\$22.50	100 µl	SL100CUW	\$22.50
10 µl	SL10CUW	22.50	250 µl	SL250CUW	27.50
15 µl	SL15CUW	22.50	500 µl	SL500CUW	31.25
20 µl	SL20CUW	22.50	1 ml	SL1KCUW	35.00
25 µl	SL25CUW	22.50	2 ml	SL2KCUW	45.00
50 µl	SL50CUW	22.50	5 ml	SL5KCUW	52.50
			10 ml	SL10KCUW	68.75





ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

Sampling and switching valves, 1/8" fittings, 0.75 mm ports (.030")

UW Type

Med temp	Includes 4" standoff. Manual version has no standoff.	Standard electric actuator: 110 VAC for USA 110/230 VAC to 24 VDC power supply for international Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply	Sample loops are not included with valves. Order separately (see facing page).	SPECS 400 psi gas 225°C max Nitronic 60 valve body Valcon E rotor For 300 psi, 330°C max, see facing page.
1/8"				




				
	4 Ports	6 Ports	8 Ports	10 Ports
	<i>Prod No Price</i>	<i>Prod No Price</i>	<i>Prod No Price</i>	<i>Prod No Price</i>
Manual	4UWE \$515	6UWE \$570	8UWE \$625	n/a
Manual with standoff	44UWE 560	46UWE 615	48UWE 670	410UWE \$670
With air actuator	A44UWE 720	A46UWE 775	A48UWE 830	A410UWE 830
With standard electric actuator	E44UWE 1040	E46UWE 1095	E48UWE 1150	E410UWE 1150
With microelectric actuator	ED44UWE 1270	ED46UWE 1325	ED48UWE 1380	ED410UWE 1380
Replacement valve	D4UWE 470	D6UWE 525	D8UWE 580	D10UWE 580
Replacement rotor	SSA4UWE 75	SSA6UWE 75	SSA8UWE 75	SSA10UWE 75

OPTIONS	
■	3, 12, and 14 port valves available
■	2", 3", and 6" standoffs
■	Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
■	Larger bore available


Sampling and switching valves, 1/4" fittings, 4.0 mm ports (.156")

MW Type

Low temp	Includes 4" standoff. Manual version not available without standoff.	Standard electric actuator: 110 VAC for USA 110/230 VAC to 24 VDC power supply for international Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply	Sample loops are not available.	SPECS 100 psi gas 75°C max Nitronic 60 valve body Valcon E2 rotor
1/4"				

			
	4 Ports	6 Ports	8 Ports
	<i>Prod No Price</i>	<i>Prod No Price</i>	<i>Prod No Price</i>
Manual with standoff	4VL4MWE2 \$1065	4VL6MWE2 \$1120	4VL8MWE2 \$1175
With air actuator	A4VL4MWE2 1200	A4VL6MWE2 1255	A4VL8MWE2 1310
With std electric actuator	E4VL4MWE2 1520	E4VL6MWE2 1575	E4VL8MWE2 1630
With microelectric actuator	ET4VL4MWE2 1750	ET4VL6MWE2 1805	ET4VL8MWE2 1860
Replacement valve	DVL4MWE2 950	DVL6MWE2 1005	DVL8MWE2 1060
Replacement rotor	SSAVL4MWE2 175	SSAVL6MWE2 175	SSAVL8MWE2 175

OPTIONS	
■	2", 3", and 6" standoffs
■	Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)

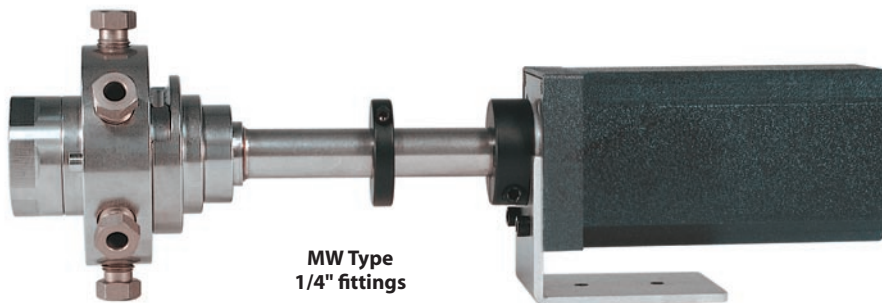

Sampling and switching valves, 1/8" fittings, 0.75 mm ports (.030")

UW Type

SPECS
300 psi gas
330°C max

Nitronic 60 valve body
Valcon T rotor

For 400 psi, 225°C max,
see facing page.

Includes 4" standoff.
Manual version not
available without
standoff.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for
international
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply

Sample loops are not
included with valves.
Order separately.

High temp

1/8" 0.75 mm

OPTIONS

- 3, 12, and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
- Larger bore available



4 Ports

Prod No Price



6 Ports

Prod No Price



8 Ports

Prod No Price



10 Ports

Prod No Price

Manual with standoff
With air actuator

44UWT \$560
A44UWT 720

46UWT \$615
A46UWT 775

48UWT \$670
A48UWT 830

410UWT \$670
A410UWT 830

With standard electric actuator
With microelectric actuator

E44UWT 1040
ED44UWT 1270

E46UWT 1095
ED46UWT 1325

E48UWT 1150
ED48UWT 1380

E410UWT 1150
ED410UWT 1380


Replacement valve
Replacement rotor

D4UWT 470
SSA4UWT 75

D6UWT 525
SSA6UWT 75

D8UWT 580
SSA8UWT 75

D10UWT 580
SSA10UWT 75

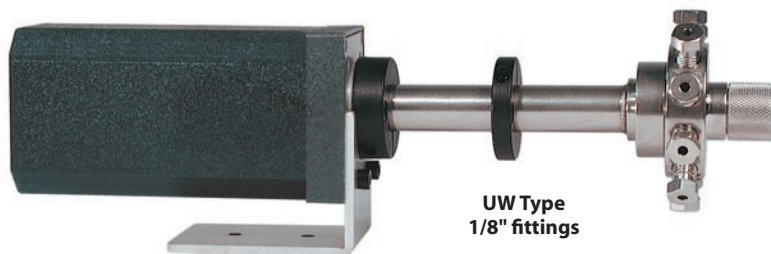


UW Type
1/8" fittings

MORE INFORMATION

- Actuators
Air page 195
Manual 204
Microelectric .. 188-189
Standard elec. 193
- Materials
Metals 254-255
Polymers 256
Valve rotors 257
- Standoff
assemblies 205

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops <100 µl are made from 1/16" OD tubing with brazed or welded 1/8" tube ends.



1/8" Stainless steel loops

for UW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.

Volume	Prod No	Price	Volume	Prod No	Price
10 µl	SL10UW	\$35.00	250 µl	SL250UW	\$27.50
15 µl	SL15UW	35.00	500 µl	SL500UW	30.00
20 µl	SL20UW	35.00	1 ml	SL1KUW	30.00
25 µl	SL25UW	35.00	2 ml	SL2KUW	32.50
50 µl	SL50UW	35.00	5 ml	SL5KUW	40.00
100 µl	SL100UW	27.50	10 ml	SL10KUW	56.25
			20 ml	SL20KUW	100.00

HPLC Injectors

Internal sample injectors, 1/16" fittings, 0.40 mm ports (.016")
0.25 mm column port diameter (.010")

W Type

5,000 psi
Internal sample
1/16" 0.40 mm

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.



SPECS
5000 psi liq
75°C max
 Nitronic 60 valve body
 Valcon H rotor

Sample volume	.06 µl		.1 µl		.2 µl		.5 µl	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	CI4W.06	\$620	CI4W.1	\$620	CI4W.2	\$620	CI4W.5	\$620
With air actuator	ACI4W.06	825	ACI4W.1	825	ACI4W.2	825	ACI4W.5	825
With standard electric actuator	ECI4W.06	1145	ECI4W.1	1145	ECI4W.2	1145	ECI4W.5	1145
With microelectric actuator	EPCI4W.06	1315	EPCI4W.1	1315	EPCI4W.2	1315	EPCI4W.5	1315
Replacement valve	DCI4W.06	575	DCI4W.1	575	DCI4W.2	575	DCI4W.5	575
Replacement rotor	SSACI4W.06	75	SSACI4W.1	75	SSACI4W.2	75	SSACI4W.5	75

OPTIONS

- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
- 1/32" fittings with 0.25 mm bore (.010") also available. Consult factory for product number and pricing.



W Type
1/16" fittings



UW Type
1/16" fittings

Internal sample injectors, 1/16" fittings, 0.75 mm ports (.030")

UW Type

5,000 psi
Internal sample
1/16" 0.75 mm

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.



SPECS
5000 psi liq
75°C max
 Nitronic 60 valve body
 Valcon H rotor

Sample volume	.2 µl		.5 µl		1 µl		2 µl	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	CI4UW.2	\$615	CI4UW.5	\$615	CI4UW1	\$615	CI4UW2	\$615
With air actuator	ACI4UW.2	820	ACI4UW.5	820	ACI4UW1	820	ACI4UW2	820
With standard electric actuator	ECI4UW.2	1140	ECI4UW.5	1140	ECI4UW1	1140	ECI4UW2	1140
With microelectric actuator	EDCI4UW.2	1370	EDCI4UW.5	1370	EDCI4UW1	1370	EDCI4UW2	1370
Replacement valve	DCI4UW.2	570	DCI4UW.5	570	DCI4UW1	570	DCI4UW2	570
Replacement rotor	SSACI4UW.2	75	SSACI4UW.5	75	SSACI4UW1	75	SSACI4UW2	75

OPTIONS

- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
- 1/32" fittings with 0.25 mm bore (.010") also available. Consult factory for product number and pricing.

Injectors and switching valves, 1/16" fittings, 0.40 mm ports (.016")

W Type

SPECS
5000 psi liq
75°C max

Nitronic 60 valve body
Valcon H rotor

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply

Sample loops are not included with valves.
Order separately.

5,000 psi
Analytical
1/16" 0.40 mm

OPTIONS

- 3 and 12 port valves available
- 2", 3", 4", and 6" standoffs
- 1/32" and 1/16" versions available with 0.25 mm (.010") bore
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)



4 Ports
Prod No Price



6 Ports
Prod No Price




8 Ports
Prod No Price



10 Ports
Prod No Price

Manual	C4W	\$570	C6W	\$625	C8W	\$680	C10W	\$680
With air actuator	AC4W	775	AC6W	830	AC8W	885	AC10W	885
With standard electric actuator	EC4W	1095	EC6W	1150	EC8W	1205	EC10W	1205
With microelectric actuator	EPC4W	1265	EPC6W	1320	EPC8W	1375	EPC10W	1375
Replacement valve	DC4W	525	DC6W	580	DC8W	635	DC10W	635
Replacement rotor	SSAC4W	75	SSAC6W	75	SSAC8W	75	SSAC10W	75



W Type
1/16" fittings

MORE INFORMATION

- Actuators
Air page 195
Manual 204
Microelectric .. 188-189
Standard elec. 193
- Materials
Metals 254-255
Polymers 256
Valve rotors 257
- Standoff assemblies 205

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

1/16" Stainless steel loops

for W Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules.
Order special fittings separately.



Volume	Prod No	Price	Volume	Prod No	Price
2 µl	SL2CW	\$22.50	100 µl	SL100CW	\$22.50
5 µl	SL5CW	22.50	250 µl	SL250CW	27.50
10 µl	SL10CW	22.50	500 µl	SL500CW	31.25
15 µl	SL15CW	22.50	1 ml	SL1KCW	35.00
20 µl	SL20CW	22.50	2 ml	SL2KCW	45.00
25 µl	SL25CW	22.50	5 ml	SL5KCW	52.50
50 µl	SL50CW	22.50	10 ml	SL10KCW	68.75

Semi-Preparative HPLC

Injectors and switching valves, 1/16" fittings, 0.75 mm ports (.030")

UW Type

5,000 psi

Semi-prep





1/16" 0.75 mm

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international

Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply

Sample loops are not included with valves. Order separately.

SPECS
5000 psi liq
75°C max
Nitronic 60 valve body
Valcon H rotor

								
	4 Ports		6 Ports		8 Ports		10 Ports	
	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
Manual	C4UW	\$565	C6UW	\$620	C8UW	\$675	C10UW	\$675
With air actuator	AC4UW	770	AC6UW	825	AC8UW	880	AC10UW	880
With standard electric actuator	EC4UW	1090	EC6UW	1145	EC8UW	1200	EC10UW	1200
With microelectric actuator	EDC4UW	1320	EDC6UW	1375	EDC8UW	1430	EDC10UW	1430
Replacement valve	DC4UW	520	DC6UW	575	DC8UW	630	DC10UW	630
Replacement rotor	SSAC4UW	75	SSAC6UW	75	SSAC8UW	75	SSAC10UW	75

- OPTIONS**
- 3, 12, and 14 port valves available
 - 2", 3", 4", and 6" standoffs
 - 1/32" and 1/16" versions available with 0.25 mm (.010") bore
 - Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
 - Larger bore available.



UW Type
1/16" fittings

1/16" Stainless steel loops *for UW Type valves*

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



<i>Volume</i>	<i>Prod No</i>	<i>Price</i>	<i>Volume</i>	<i>Prod No</i>	<i>Price</i>
3 µl	SL3CUW	\$25.00	100 µl	SL100CUW	\$22.50
5 µl	SL5CUW	22.50	250 µl	SL250CUW	27.50
10 µl	SL10CUW	22.50	500 µl	SL500CUW	31.25
15 µl	SL15CUW	22.50	1 ml	SL1KCUW	35.00
20 µl	SL20CUW	22.50	2 ml	SL2KCUW	45.00
25 µl	SL25CUW	22.50	5 ml	SL5KCUW	52.50
50 µl	SL50CUW	22.50	10 ml	SL10KCUW	68.75

- ABOUT LOOPS**
- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
 - Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

Injectors and switching valves, 1/8" fittings, 0.75 mm (.030")

UW Type

SPECS
5000 psi liq
75°C max
 Nitronic 60 valve body
 Valcon H rotor

Manual 10 port
 includes 2" standoff.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for
 international
 Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC
 power supply

Sample loops are not
 included with valves.
 Order separately.

5,000 psi

Semi-prep

1/8" 0.75 mm

OPTIONS

- 3 and 12 port valves available
- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
- Larger bore available. (see page 116)

Manual
 With air actuator
 With standard electric actuator
 With microelectric actuator
 Replacement valve
 Replacement rotor



4 Ports

Prod No Price



6 Ports

Prod No Price



8 Ports


Prod No Price



10 Ports

Prod No Price

Manual	4UW	\$565	6UW	\$620	8UW	\$675	210UW	\$720
With air actuator	A4UW	770	A6UW	825	A8UW	880	A10UW	880
With standard electric actuator	E4UW	1090	E6UW	1145	E8UW	1200	E10UW	1200
With microelectric actuator	ED4UW	1320	ED6UW	1375	ED8UW	1430	ED10UW	1430
Replacement valve	D4UW	520	D6UW	575	D8UW	630	D10UW	630
Replacement rotor	SSA4UW	75	SSA6UW	75	SSA8UW	75	SSA10UW	75



UW Type
1/8" fittings

MORE INFORMATION

- Actuators
 Air page 195
 Manual.....204
 Microelectric . . 188-189
 Standard elec. 193
- Materials
 Metals. 254-255
 Polymers256
 Valve rotors.257
- Standoff
 assemblies205

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops < 100 µl are made from 1/16" OD tubing with brazed or welded 1/8" tube ends.



1/8" Stainless steel loops

for UW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.

<i>Volume</i>	<i>Prod No</i>	<i>Price</i>	<i>Volume</i>	<i>Prod No</i>	<i>Price</i>
10 µl	SL10UW	\$35.00	250 µl	SL250UW	\$27.50
15 µl	SL15UW	35.00	500 µl	SL500UW	30.00
20 µl	SL20UW	35.00	1 ml	SL1KUW	30.00
25 µl	SL25UW	35.00	2 ml	SL2KUW	32.50
50 µl	SL50UW	35.00	5 ml	SL5KUW	40.00
100 µl	SL100UW	27.50	10 ml	SL10KUW	56.25
			20 ml	SL20KUW	100.00

Preparative HPLC

Injectors and switching valves, 1/8" fittings, large bore

UW Type

5,000 psi
Prep
1/8" Large bore

Manual 10 port
includes 2" standoff.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for
international.

Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply.

Sample loops are not
included with valves.
Order separately.

SPECS

5000 psi liq
75°C max
Nitronic 60 valve body
Valcon H rotor



4 Ports
1.7 mm (.067")
Prod No Price



6 Ports
1.7 mm (.067")
Prod No Price



8 Ports
1.3 mm (.050")
Prod No Price




10 Ports
1.0 mm (.040")
Prod No Price

Manual	L4UW	\$620	L6UW	\$675	L8UW	\$730	2L10UW	\$775
With air actuator	AL4UW	825	AL6UW	880	AL8UW	935	AL10UW	935
With standard electric actuator	EL4UW	1145	EL6UW	1200	EL8UW	1255	EL10UW	1255
With microelectric actuator	EDL4UW	1375	EDL6UW	1430	EDL8UW	1485	EDL10UW	1485
Replacement valve	DL4UW	575	DL6UW	630	DL8UW	685	DL10UW	685
Replacement rotor	SSAL4UW	105	SSAL6UW	105	SSAL8UW	105	SSAL10UW	105

OPTIONS

- 3 port valve available
- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
- Smaller bore available. (see page 115)



UW Type
1/8" fittings

MORE INFORMATION

Actuators
Air page 195
Manual 204
Microelectric ... 188-189
Standard elec. 193

Materials
Metals 254-255
Polymers 256
Valve rotors. 257

Standoff
assemblies 205

1/8" Stainless steel loops for UW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.

Volume	Prod No	Price	Volume	Prod No	Price
100 µl	SL100UW	\$27.50	2 ml	SL2KUW	\$32.50
250 µl	SL250UW	27.50	5 ml	SL5KUW	40.00
500 µl	SL500UW	30.00	10 ml	SL10KUW	56.25
1 ml	SL1KUW	30.00	20 ml	SL20KUW	100.00



ABOUT LOOPS


- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops < 100 µl are made from 1/16" OD tubing with brazed or welded 1/8" tube ends..

Two Position Applications

These illustrations show basic sample injection techniques using Valco two position valves. With rare exceptions, there is no difference between switching valves and external volume sampling valves, so the same valve can be used for either function.

The unique advantage of 8 and 10 port valves is that they reduce extra column volume by combining sampling and switching functions in a single valve. This minimizes expense, maintenance, service, and risk of leaks as compared to multiple 6 port valve systems.


4 port internal sample injector

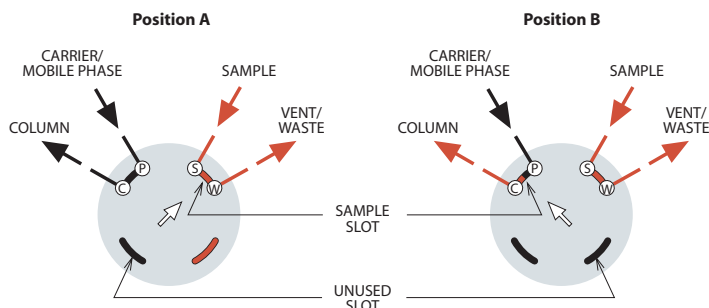

MICROVOLUME SAMPLE INJECTION

The internal sample (fixed volume) flowpath is used when very small sample volumes are required. The sample size is determined by a passage engraved on the valve rotor, allowing precise, repeatable injections. In Position A, the sample flows through the sample passage while the mobile phase flows through to the column. The third passage is inactive. In Position B, the sample passage is in line with the column and the mobile phase injects the contents of the sample passage onto the column. The passage which was inactive in Position A allows the sample to continue flowing without interruption.

6 port internal sample injector

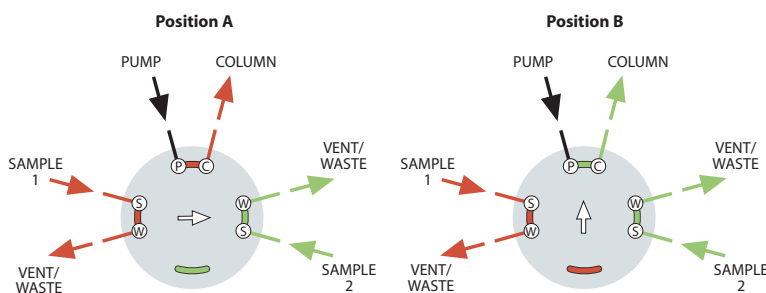

DUAL MICROVOLUME SAMPLE INJECTION

This microvolume injector can be used to alternate between two different samples. Each time the valve is switched, a sample is injected. By connecting the two sample inlets in series, the valve injects the sample each time the valve switches. This is particularly useful in heavy duty cycle operations to minimize valve wear. The valve can also be used to make alternating injections of the same sample onto two different columns by swapping sample/waste and pump/column connections.


Note: This CI6 valve is not shown in this catalog. Call for details.

Two Position Applications

4 port switching valve

DETECTOR SELECTION FROM TWO COLUMNS OR ONE COLUMN AND AUXILIARY CARRIER

This unique configuration allows analyses of different parts of one analysis with two different detectors, without splitting or multiple injections. For example, fixed gases can be analyzed with a thermal conductivity detector, followed by the analysis of a hydrocarbon fraction with a flame ionization detector.

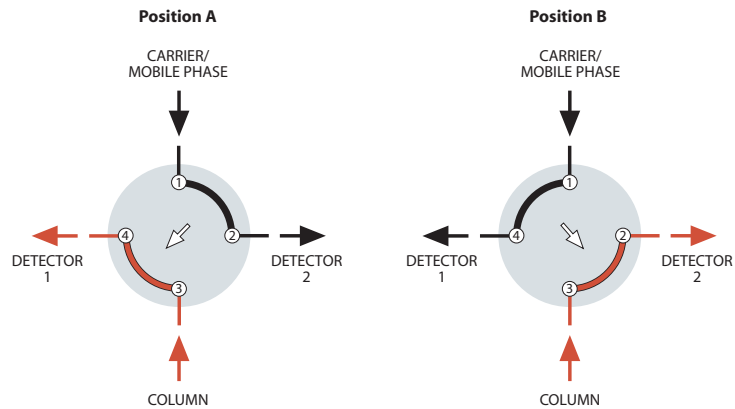


6 port external sample injector

SAMPLE INJECTION

With the valve in Position A, sample flows through the external loop while the mobile phase flows directly through to the chromatographic column. When the valve is switched to Position B, the sample contained in the sample loop and valve flow passage is displaced by the mobile phase and is carried onto the column.

Note: This is especially critical for partially-filled loops. The flow direction of the mobile phase through the loop should be opposite (backflush) to the flow direction during the loading of the loop.

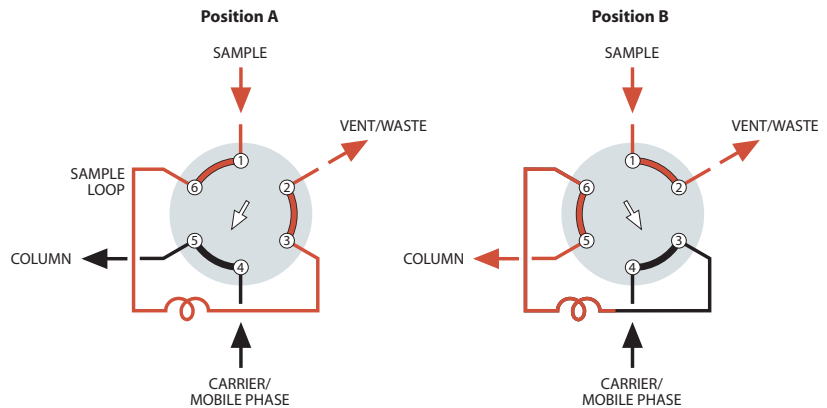


6 port column switching

BACKFLUSH OF PRECOLUMN TO VENT


This plumbing scheme allows slower eluting components (end cut) which are not of interest to be backflushed to vent. Often a shorter version of the analytical column is used as the precolumn. Once all the components of interest have entered the main column (at port 2), the valve switches, backflushing the precolumn to vent and reducing analysis time.

Note: An auxiliary source of carrier or mobile phase is required for this application.

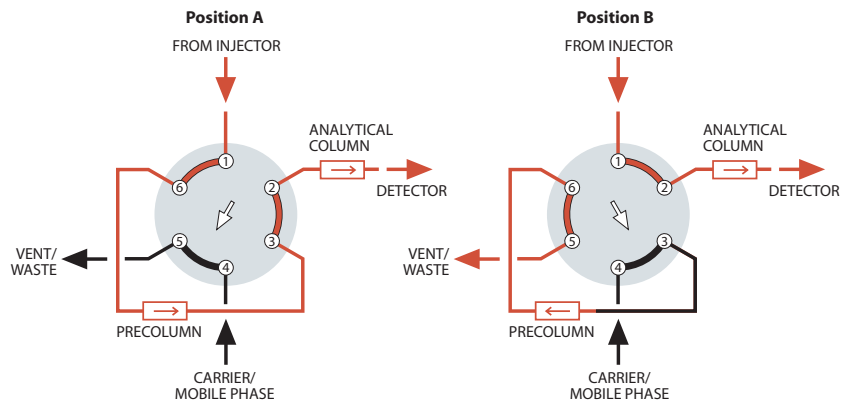

Two Position Applications

6 port column selection

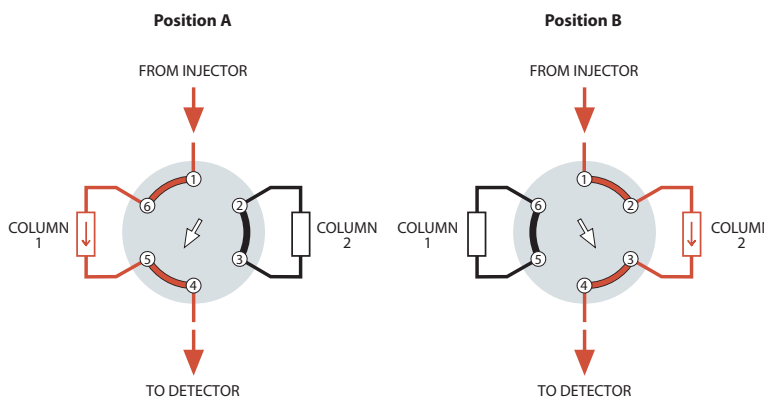


TWO COLUMN SELECTION

When two different columns are required at frequent intervals at similar oven temperatures, a 6 port valve can provide rapid selection of the one to be used. The column not in use is protected by a blanket of inert mobile phase and may be rapidly brought to equilibrium when required.

Note: If flow must be maintained to the non-selected column, an 8 or 10 port valve is required.


8 port dual external sample injector

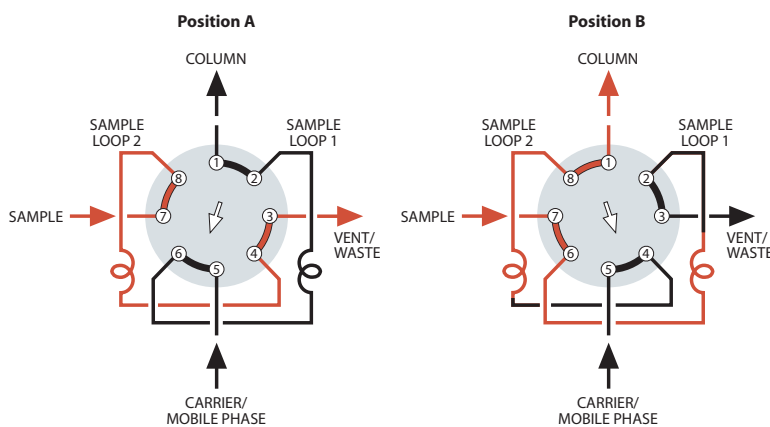

SAME SAMPLE TO DIFFERENT LOOPS

In a dual external sample loop configuration, sample is injected in both positions. In Position A, Loop 2 is loaded while the mobile phase flows through Loop 1 and onto the column. In Position B, the Loop 2 sample is injected into the column and another sample is loaded into Loop 1. When the valve is returned to Position A, the Loop 1 sample is injected onto the column and Loop 2 is reloaded.

8 port sampling/switching

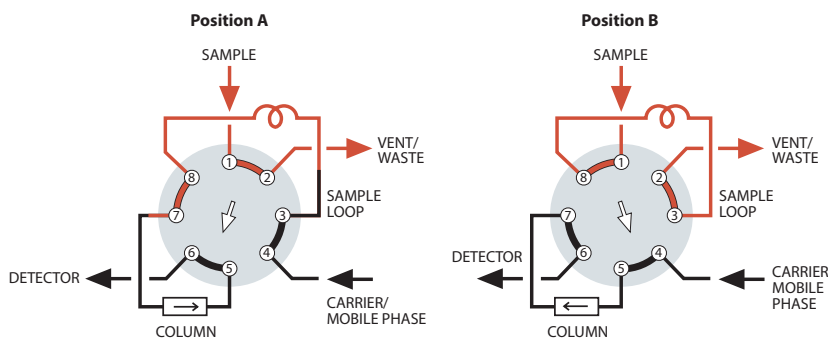

LOOP SAMPLING WITH BACKFLUSH TO DETECTOR

One valve functions as both a sampling and a backflush valve, simplifying operation and reducing cost. When components of interest are detected, the strongly retained components are backflushed and removed from the column without temperature programming.

Two Position Applications


10 port dual external sampling

TWO DIFFERENT SAMPLES TO SAME COLUMN

A 10 port valve permits alternate injections from the two loops, which may be identical or of different sizes. This technique replaces a 4 port sample selector and a 6 port sample injector.

In Position A, Loop 2 is loaded with sample 2 while the mobile phase flows through Loop 1 and onto the column.

In Position B, the Loop 2 sample is injected onto the column and Loop 1 is loaded with sample 1. When the valve is returned to Position A, the Loop 1 sample is injected onto the column and Loop 2 is reloaded with sample 2.

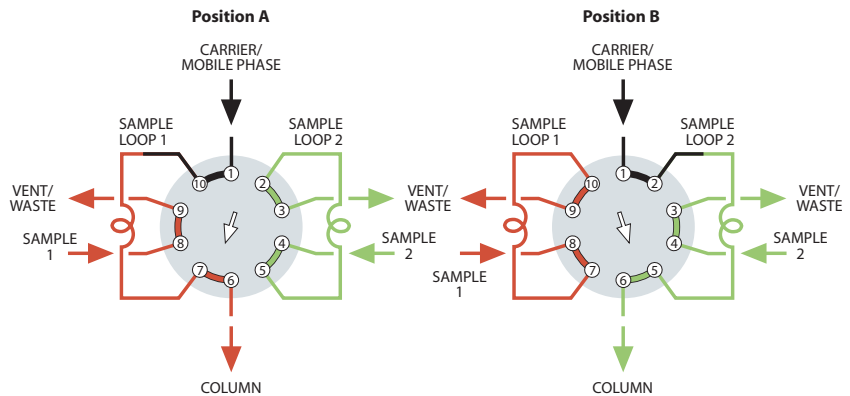


10 port dual external sampling

SIMULTANEOUS INJECTION OF THE SAME SAMPLE ONTO SEPARATE COLUMNS

In Position A, sample fills the two loops in series. In Position B, the sample is simultaneously injected into two separate flow systems. A single autosampler used with this flowpath can automate two analytical procedures for the same sample.


In an important non-chromatographic application, the roles of carrier and sample are reversed, permitting two different quantities of two different materials to be dispensed together, as in automatic dilution.

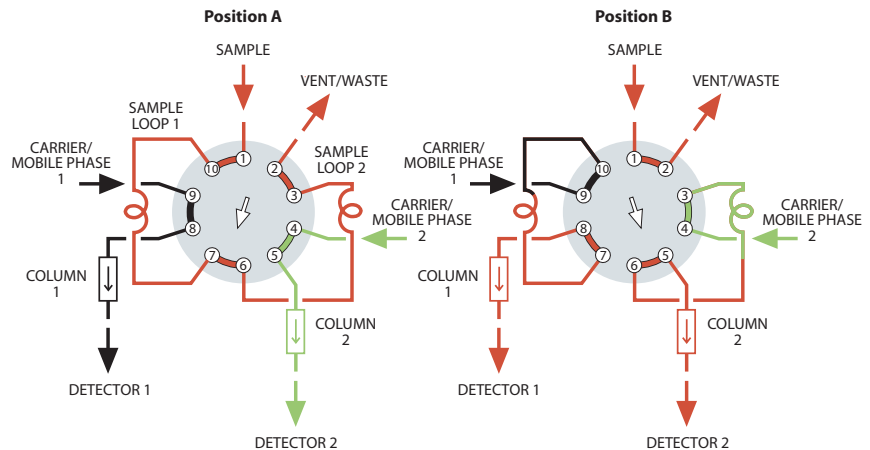

10 port sampling/switching


LOOP SAMPLING WITH BACKFLUSH OF PRE-COLUMN TO VENT

When components of interest have low boiling points, this plumbing scheme allows "heavy" components with long retention times to be backflushed to waste. After the sample loop is loaded in Position A, the valve is switched to Position B to inject the sample onto column 2. As soon as all components of interest have entered column 2, the valve is switched back to Position A. Column 1 is backflushed to vent during the analysis, reducing the total analysis time.

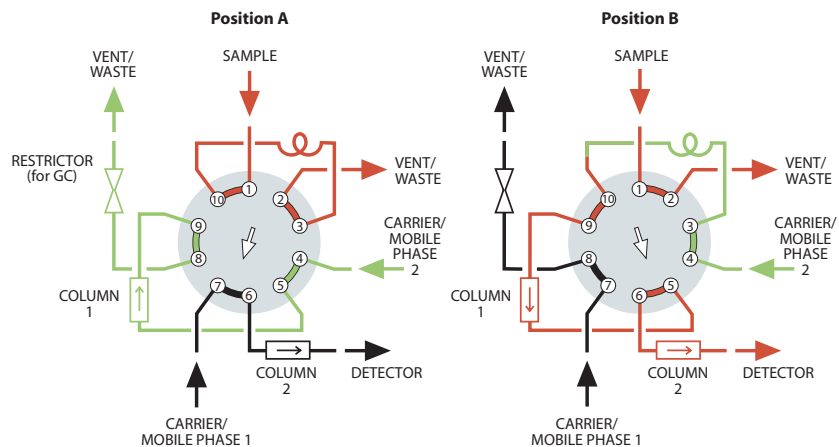

Two Position Applications


10 port sampling/switching

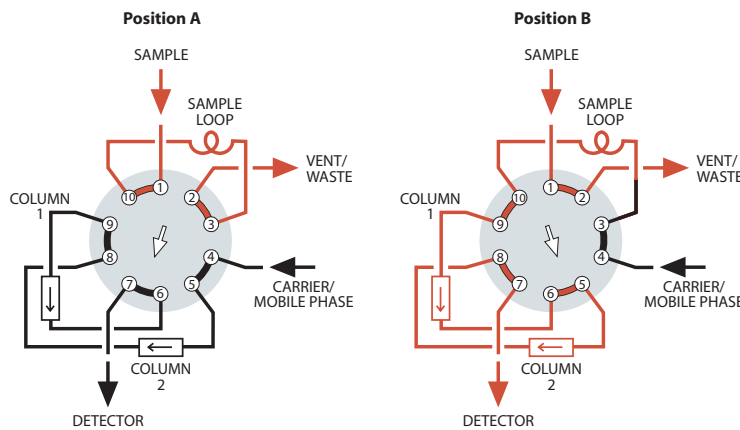

LOOP SAMPLING WITH TWO COLUMN SEQUENCE REVERSAL

This is ideal for fixed-gas-from-CO₂ analysis where no “high boilers” are present. Column 1 is packed with a porous polymer and Column 2 with molecular sieve. The sample loop is loaded in Position A. When the valve is switched, the loop contents are sent onto Column 1. As the inorganic gases and methane leave Column 1 and enter Column 2, the valve is returned to Position A, reversing the column sequence. CO₂ now leaves Column 1, becoming the first peak. The inorganics and methane are separated by the molesieve and pass through the porous polymer column to the detector.


10 port column switching

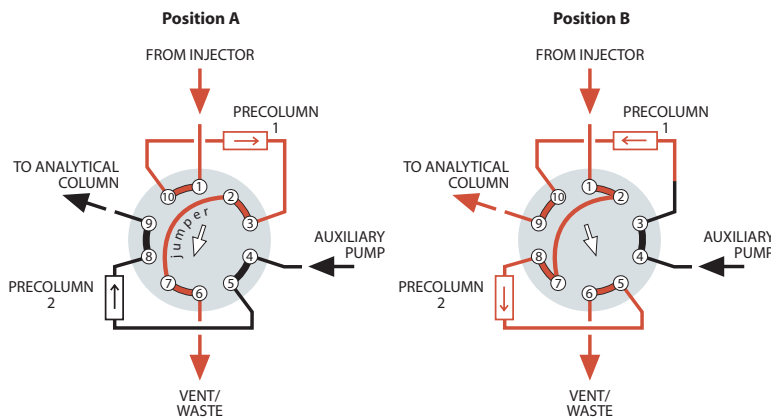

SAMPLE ENRICHMENT (CLEANUP) USING DUAL PRECOLUMNS

Sample is injected by a separate injector onto one of two precolumns (stripper). Early eluting components vent at port 6 while components of interest are retained on the stripper. When the valve is switched, a new injection is made onto the second stripper while components retained on the first stripper are backflushed onto the analytical column at port 9. *Note:* This application requires an auxiliary pump at port 4.

10 port column switching

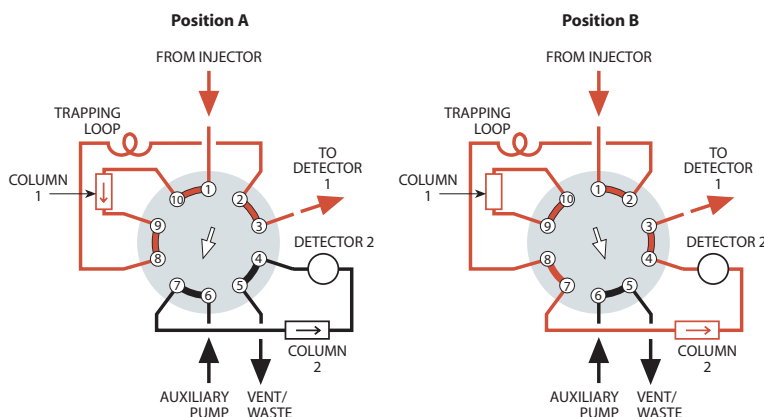


HEART CUT TRAPPED IN A LOOP AND INJECTED ONTO A SECOND COLUMN

Sample is injected (using a separate injector) onto an analytical column. Early eluting components (front cut) pass through a trapping loop and are detected (at port 3). The valve is then switched, and the center (or heartcut) which was retained in the trapping loop is injected onto the second column to the detector (at port 4). Late eluting components (end cut) are trapped on the first column. When the valve is switched again, the end cut passes through the trapping loop to the first detector, completing the analysis.

Selectors – Low Pressure

Dead-end flowpath – SD configuration

SD valves select one of 4 to 16 dead-ended streams. The selected stream flows from the outlet to a sample valve, pressure sensor, detector, column, etc. The same flowpath can also be used to direct one stream to a number of outlets in applications such as fraction collection. For an application suggestion, see page 134.

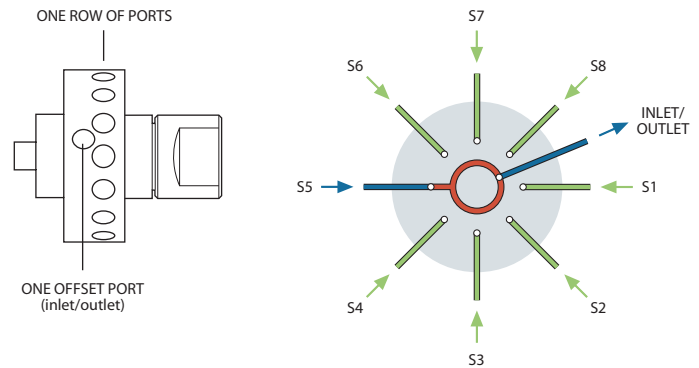

1/16" fittings, 0.75 mm ports (.030")

MW Type

Low pressure

SD Dead-end

1/16" 0.75 mm

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.

Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international


Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

SPECS
 400 psi gas
 200°C max
 Nitronic 60 body
 Valcon E rotor

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2CSD6MWE	\$820	2CSD10MWE	\$905	2CSD12MWE	\$985	2CSD16MWE	\$985
With air actuator	A2CSD6MWE	1065	A2CSD10MWE	1150	A2CSD12MWE	1230	A2CSD16MWE	1230
With standard electric actuator	E2CSD6MWE	1470	E2CSD10MWE	1555	E2CSD12MWE	1635	E2CSD16MWE	1635
With microelectric actuator	EMT2CSD6MWE	1690	EMT2CSD10MWE	1775	EMT2CSD12MWE	1855	EMT2CSD16MWE	1855
Replacement valve	DCSD6MWE	660	DCSD10MWE	745	DCSD12MWE	825	DCSD16MWE	825
Replacement rotor	SSACSD6MWE	105	SSACSD10MWE	105	SSACSD12MWE	105	SSACSD16MWE	105

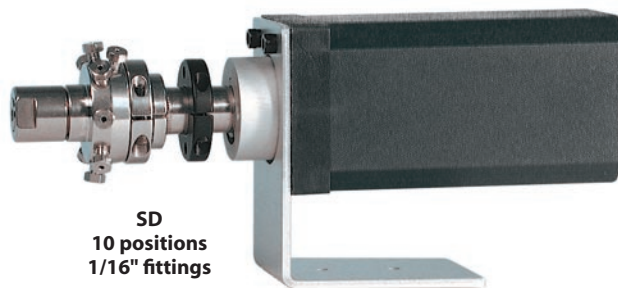

MORE INFORMATION

Application. page 134

Actuators

- Air 194
- Microelectric 190-191
- Standard elec. 193

Materials

- Metals. 254-255
- Polymers 256
- Valve rotors. 257

Mounting hardware

- Closemount 208
- Standoff. 205

1/8" fittings, 1.0 mm ports (.040")

MW Type

SPECS

4-8 Positions:
400 psi gas
200°C max
 10-16 Positions:
200 psi gas
200°C max
 Nitronic 60 body
 Valcon E rotor

Includes 2" standoff.
 Ask about closemount assembly if valve will not be heated.

Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

Low pressure

SD
 Dead-end

1/8"

1.0 mm

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2SD6MWE	\$820	2SD10MWE	\$905	2SD12MWE	\$985	2SD16MWE	\$985
With air actuator	A2SD6MWE	1065	A2SD10MWE	1150	A2SD12MWE	1230	A2SD16MWE	1230
With standard electric actuator	E2SD6MWE	1470	E2SD10MWE	1555	E2SD12MWE	1635	E2SD16MWE	1635
With microelectric actuator	EMT2SD6MWE	1690	EMT2SD10MWE	1775	EMT2SD12MWE	1855	EMT2SD16MWE	1855
Replacement valve	DSD6MWE	660	DSD10MWE	745	DSD12MWE	825	DSD16MWE	825
Replacement rotor	SSASD6MWE	105	SSASD10MWE	105	SSASD12MWE	105	SSASD16MWE	105

1/4" fittings, 4.0 mm ports (.156")

MW Type

SPECS

100 psi gas
75°C max
 Nitronic 60 body
 Valcon E2 rotor

Includes 2" standoff.
 Ask about closemount assembly if valve will not be heated.

Manual version not available.

Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international

Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

Low pressure

SD
 Dead-end


1/4"

4.0 mm

OPTIONS

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)


	4 Position		6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
With air actuator	AH2VLS4MWE2	\$1665	AH2VLS6MWE2	\$1720	AH2VLS8MWE2	\$1805	AH2VLS10MWE2	\$1805
With std electric actuator	E2VLS4MWE2	1845	E2VLS6MWE2	1900	E2VLS8MWE2	1985	E2VLS10MWE2	1985
With microelectric actuator	EMT2VLS4MWE2	2065	EMT2VLS6MWE2	2120	EMT2VLS8MWE2	2205	EMT2VLS10MWE2	2205
Replacement valve	DVLS4MWE2	1035	DVLS6MWE2	1090	DVLS8MWE2	1175	DVLS10MWE2	1175
Replacement rotor	SSAVLS4MWE2	190	SSAVLS6MWE2	190	SSAVLS8MWE2	190	SSAVLS10MWE2	190

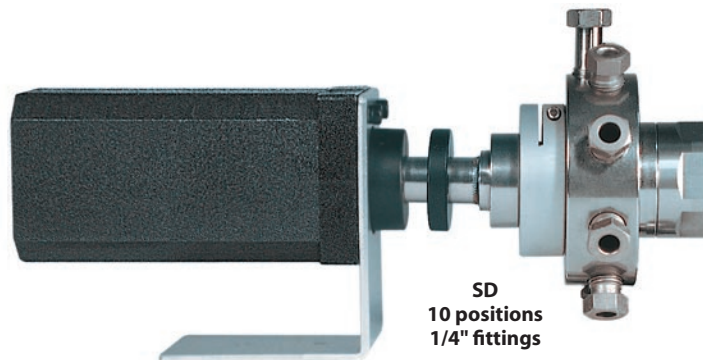

Selectors – Low Pressure

Common outlet flowpath – SC configuration

SC selectors are similar to the SD configuration, except that instead of being dead-ended the non-selected streams flow to a common outlet. For an application suggestion, see page 135.

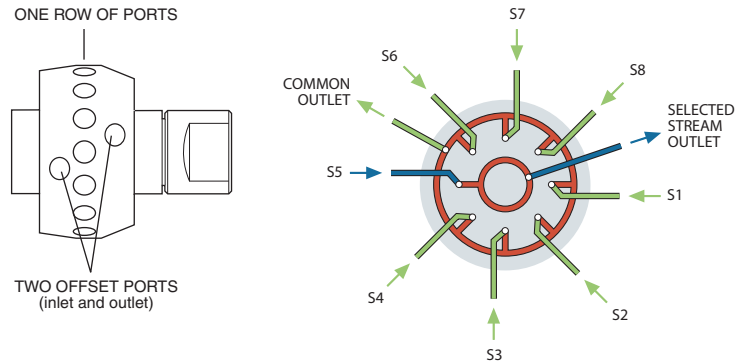

1/16" fittings, 1.0 mm ports (.040")

MW Type

Low pressure

SC Common outlet

1/16" 1.0 mm

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.


Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

SPECS
 200 psi gas
 200°C max
 Nitronic 60 body
 Valcon E rotor

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2CSC6MWE	\$850	2CSC10MWE	\$935	2CSC12MWE	\$1015	2CSC16MWE	\$1015
With air actuator	A2CSC6MWE	1095	A2CSC10MWE	1180	A2CSC12MWE	1260	A2CSC16MWE	1260
With standard electric actuator	E2CSC6MWE	1500	E2CSC10MWE	1585	E2CSC12MWE	1665	E2CSC16MWE	1665
With microelectric actuator	EMT2CSC6MWE	1720	EMT2CSC10MWE	1805	EMT2CSC12MWE	1885	EMT2CSC16MWE	1885
Replacement valve	DCSC6MWE	690	DCSC10MWE	775	DCSC12MWE	855	DCSC16MWE	855
Replacement rotor	SSACSC6MWE	105	SSACSC10MWE	105	SSACSC12MWE	105	SSACSC16MWE	115

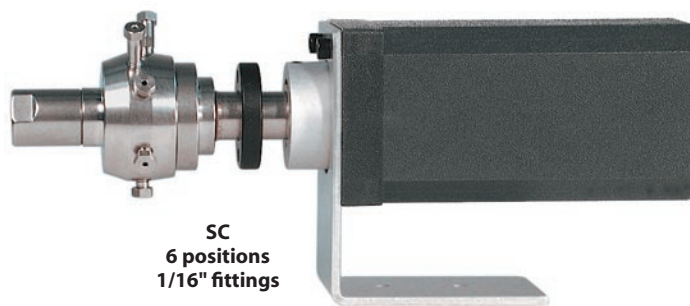

MORE INFORMATION

Application. page 135

Actuators

- Air 194
- Microelectric 190-191
- Standard elec. 193

Materials

- Metals. 254-255
- Polymers 256
- Valve rotors. 257

Mounting hardware

- Closemount 208
- Standoff. 205

1/8" fittings, 1.0 mm ports (.040")

MW Type

SPECS
200 psi gas
200°C max
 Nitronic 60 body
 Valcon E rotor

Includes 2" standoff.
 Ask about closemount assembly if valve will not be heated.

Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

Low pressure

SC
Common outlet

1/8" **1.0 mm**

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2SC6MWE	\$850	2SC10MWE	\$935	2SC12MWE	\$1015	2SC16MWE	\$1015
With air actuator	A2SC6MWE	1095	A2SC10MWE	1180	A2SC12MWE	1260	A2SC16MWE	1260
With standard electric actuator	E2SC6MWE	1500	E2SC10MWE	1585	E2SC12MWE	1665	E2SC16MWE	1665
With microelectric actuator	EMT2SC6MWE	1720	EMT2SC10MWE	1805	EMT2SC12MWE	1885	EMT2SC16MWE	1885
Replacement valve	DSC6MWE	690	DSC10MWE	775	DSC12MWE	855	DSC16MWE	855
Replacement rotor	SSASC6MWE	105	SSASC10MWE	105	SSASC12MWE	105	SSASC16MWE	115

1/4" fittings, 4.0 mm ports (.156")

MW Type

SPECS
100 psi gas
75°C max
 Nitronic 60 body
 Valcon E2 rotor

Includes 2" standoff.
 Ask about closemount assembly if valve will not be heated.

Manual version not available.

Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

Low pressure


SC
Common outlet

1/4" **4.0 mm**

OPTIONS

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)


	4 Position		6 Position		8 Position	
	Prod No	Price	Prod No	Price	Prod No	Price
With air actuator	AH2VLSC4MWE2	\$1695	AH2VLSC6MWE2	\$1750	AH2VLSC8MWE2	\$1835
With std electric actuator	E2VLSC4MWE2	1875	E2VLSC6MWE2	1930	E2VLSC8MWE2	2015
With microelectric actuator	EMT2VLSC4MWE2	2095	EMT2VLSC6MWE2	2150	EMT2VLSC8MWE2	2235
Replacement valve	DVLSC4MWE2	1065	DVLSC6MWE2	1120	DVLSC8MWE2	1205
Replacement rotor	SSAVLSC4MWE2	190	SSAVLSC6MWE2	190	SSAVLSC8MWE2	190

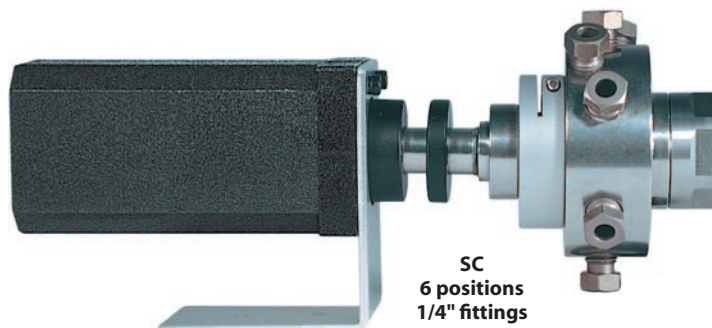

Selectors – Low Pressure

Flow-through flowpath – SF configuration

SD and SC valves select and isolate one of 4 to 16 streams, with the remainder dead-ended in the SD and flowing to a common outlet in the SC. The SF selector is similar, but carries the evolution a step further with the non-selected streams flowing through individual outlets. For an application suggestion, see page 136.

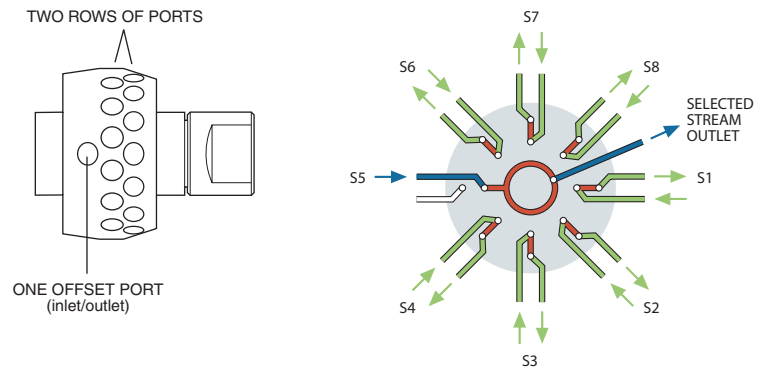

1/16" fittings, 1.0 mm ports (.040")

MW Type

Low pressure

SF Flow-through

1/16" 1.0 mm


Includes 2" standoff. Standard electric actuators:
 Ask about closemount 110 VAC for USA
 assembly if valve will 110/230 VAC to 24 VDC power supply for international
 not be heated. Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

SPECS
200 psi gas
200°C max
 Nitronic 60 body
 Valcon E rotor

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2CSF6MWE	\$965	2CSF10MWE	\$1050	2CSF12MWE	\$1130	2CSF16MWE	\$1130
With air actuator	A2CSF6MWE	1210	A2CSF10MWE	1295	A2CSF12MWE	1375	A2CSF16MWE	1375
With standard electric actuator	E2CSF6MWE	1615	E2CSF10MWE	1700	E2CSF12MWE	1780	E2CSF16MWE	1780
With microelectric actuator	EMT2CSF6MWE	1835	EMT2CSF10MWE	1920	EMT2CSF12MWE	2000	EMT2CSF16MWE	2000
Replacement valve	DCSF6MWE	805	DCSF10MWE	890	DCSF12MWE	970	DCSF16MWE	970
Replacement rotor	SSACSF6MWE	115	SSACSF10MWE	115	SSACSF12MWE	115	SSACSF16MWE	115

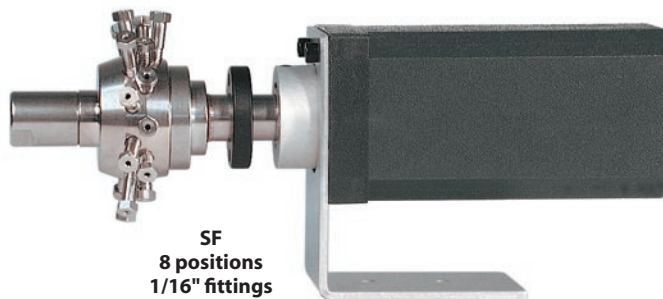

MORE INFORMATION

Application. page 136

Actuators

- Air 194
- Microelectric 190-191
- Standard elec. 193

Materials

- Metals. 254-255
- Polymers 256
- Valve rotors. 257

Mounting hardware

- Closemount 208
- Standoff. 205

1/8" fittings, 1.0 mm ports (.040")

MW Type

SPECS
 200 psi gas
 200°C max
 Nitronic 60 body
 Valcon E rotor

Includes 2" standoff.
 Ask about closemount assembly if valve will not be heated.

Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

Low pressure
 SF
 Flow-through
 1/8" 1.0 mm

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2SF6MWE	\$965	2SF10MWE	\$1050	2SF12MWE	\$1130	2SF16MWE	\$1130
With air actuator	A2SF6MWE	1210	A2SF10MWE	1295	A2SF12MWE	1375	A2SF16MWE	1375
With standard electric actuator	E2SF6MWE	1615	E2SF10MWE	1700	E2SF12MWE	1780	E2SF16MWE	1780
With microelectric actuator	EMT2SF6MWE	1835	EMT2SF10MWE	1920	EMT2SF12MWE	2000	EMT2SF16MWE	2000
Replacement valve	DSF6MWE	805	DSF10MWE	890	DSF12MWE	970	DSF16MWE	970
Replacement rotor	SSASF6MWE	105	SSASF10MWE	115	SSASF12MWE	115	SSASF16MWE	115

1/4" fittings, 4.0 mm ports (.156")

MW Type

SPECS
 100 psi gas
 75°C max
 Nitronic 60 body
 Valcon E2 rotor

Includes 2" standoff.
 Ask about closemount assembly if valve will not be heated.

Manual version is not available.


Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

Low pressure
 SF
 Flow-through
 1/4" 4.0 mm

OPTIONS

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	4 Position		6 Position		8 Position	
	Prod No	Price	Prod No	Price	Prod No	Price
With air actuator	AH2VLSF4MWE2	\$1810	AH2VLSF6MWE2	\$1865	AH2VLSF8MWE2	\$1950
With std electric actuator	E2VLSF4MWE2	1990	E2VLSF6MWE2	2045	E2VLSF8MWE2	2130
With microelectric actuator	EMT2VLSF4MWE2	2210	EMT2VLSF6MWE2	2265	EMT2VLSF8MWE2	2350
Replacement valve	DVLSF4MWE2	1180	DVLSF6MWE2	1235	DVLSF8MWE2	1320
Replacement rotor	SSAVLSF4MWE2	190	SSAVLSF6MWE2	190	SSAVLSF8MWE2	190

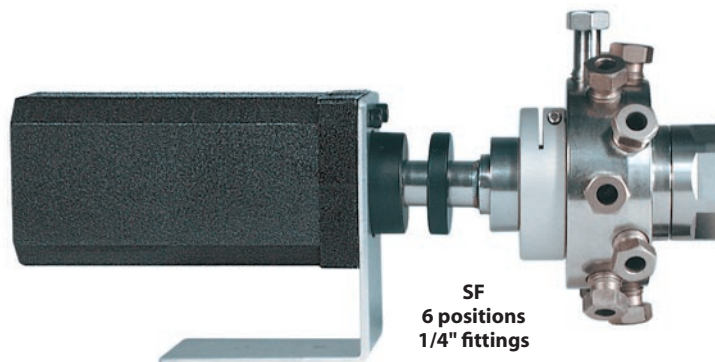


Selectors – Low Pressure


Trapping flowpath – ST configuration

ST selectors are used for multi-column, multi-sample, or multi-trap operations, and are available for use with 4 to 16 loops, or positions. For an application suggestion, see page 137.

TWO ROWS OF PORTS



TWO OFFSET PORTS (inlet and outlet)

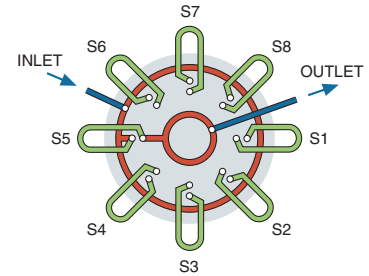

1/16" fittings, 0.75 mm ports (.030")

MW Type

Low pressure

ST Trapping

1/16" 0.75 mm

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.

Standard electric actuators:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international
Microelectric actuators:
24 VDC (includes a 110/230 VAC to 24 VDC power supply)


SPECS

200 psi gas
200°C max
Nitronic 60 body
Valcon E rotor

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2CST6MWE	\$965	2CST10MWE	\$1050	2CST12MWE	\$1130	2CST16MWE	\$1130
With air actuator	A2CST6MWE	1210	A2CST10MWE	1295	A2CST12MWE	1375	A2CST16MWE	1375
With standard electric actuator	E2CST6MWE	1615	E2CST10MWE	1700	E2CST12MWE	1780	E2CST16MWE	1780
With microelectric actuator	EMT2CST6MWE	1835	EMT2CST10MWE	1920	EMT2CST12MWE	2000	EMT2CST16MWE	2000
Replacement valve	DCST6MWE	805	DCST10MWE	890	DCST12MWE	970	DCST16MWE	970
Replacement rotor	SSACST6MWE	105	SSACST10MWE	115	SSACST12MWE	115	SSACST16MWE	115

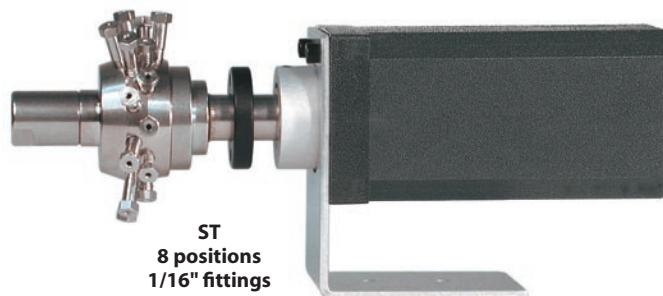

1/16" Stainless steel loops for MW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately. When a set of loops is ordered, loops will be supplied from the same lot.

Volume	Prod No	Price	Volume	Prod No	Price
50 µl	SL50CSTP	\$23.75	1 ml	SL1KCSTP	\$36.25
100 µl	SL100CSTP	23.75	2 ml	SL2KCSTP	46.25
250 µl	SL250CSTP	23.75	5 ml	SL5KCSTP	53.75
500 µl	SL500CSTP	32.50	10 ml	SL10KCSTP	70.00



MORE INFORMATION

Application.....	page 137
Actuators	
Air	194
Microelectric ..	190-191
Standard elec.....	193
Materials	
Metals.....	254-255
Polymers	256
Valve rotors.....	257
Mounting hardware	
Closemount	208
Standoff.....	205

1/8" fittings, 1.0 mm ports (.040")

MW Type

SPECS
200 psi gas
200°C max
 Nitronic 60 body
 Valcon E rotor

Includes 2" standoff.
 Ask about closemount assembly if valve will not be heated.

Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

Low pressure

ST Trapping

1/8"

1.0 mm

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2ST6MWE	\$965	2ST10MWE	\$1050	2ST12MWE	\$1130	2ST16MWE	\$1130
With air actuator	A2ST6MWE	1210	A2ST10MWE	1295	A2ST12MWE	1375	A2ST16MWE	1375
With standard electric actuator	E2ST6MWE	1615	E2ST10MWE	1700	E2ST12MWE	1780	E2ST16MWE	1780
With microelectric actuator	EMT2ST6MWE	1835	EMT2ST10MWE	1920	EMT2ST12MWE	2000	EMT2ST16MWE	2000
Replacement valve	DST6MWE	805	DST10MWE	890	DST12MWE	970	DST16MWE	970
Replacement rotor	SSAST6MWE	105	SSAST10MWE	115	SSAST12MWE	115	SSAST16MWE	115

ABOUT LOOPS

- Other materials are available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- 1/16" loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- 1/8" loops < 100 µl are made from 1/16" OD tubing with brazed or welded 1/8" tube ends.



1/8" Stainless steel loops for MW Type valves


Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately. When a set of loops is ordered, loops will be supplied from the same lot.

Volume	Prod No	Price	Volume	Prod No	Price
100 µl	SL100STP	\$28.75	1 ml	SL1KSTP	\$32.50
250 µl	SL250STP	28.75	2 ml	SL2KSTP	33.75
500 µl	SL500STP	31.25	5 ml	SL5KSTP	41.25
			10 ml	SL10KSTP	57.50

Selectors – Low Pressure

Trapping/flow-through flowpath – STF configuration

The STF selector is a variation of the ST flowpath, with the single difference that the non-selected streams are returned to their own vents or sources rather than being dead-ended or trapped as they are in the standard ST configuration. For an application suggestion, see page 138.

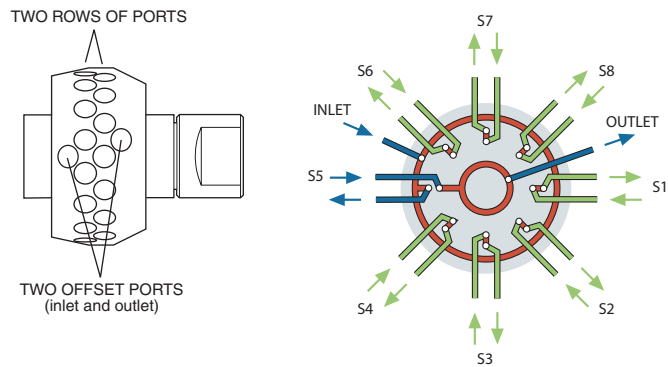

1/16" fittings, 0.75 mm ports (.030")

MW Type

Low pressure

STF
Trap/ flow-throw

1/16" **0.75 mm**

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.

Standard electric actuators:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international

Microelectric actuators:
24 VDC (includes a 110/230 VAC to 24 VDC power supply)

SPECS
200 psi gas
200°C max
Nitronic 60 body
Valcon E rotor

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2CSTF6MWE	\$990	2CSTF10MWE	\$1075	2CSTF12MWE	\$1155	2CSTF16MWE	\$1155
With air actuator	A2CSTF6MWE	1235	A2CSTF10MWE	1320	A2CSTF12MWE	1400	A2CSTF16MWE	1400
With standard elec actuator	E2CSTF6MWE	1640	E2CSTF10MWE	1725	E2CSTF12MWE	1805	E2CSTF16MWE	1805
With microelectric actuator	EMT2CSTF6MWE	1860	EMT2CSTF10MWE	1945	EMT2CSTF12MWE	2025	EMT2CSTF16MWE	2025
Replacement valve	DCSTF6MWE	830	DCSTF10MWE	915	DCSTF12MWE	995	DCSTF16MWE	995
Replacement rotor	SSACSTF6MWE	105	SSACSTF10MWE	115	SSACSTF12MWE	115	SSACSTF16MWE	115

MORE INFORMATION

Application. page 138

Actuators

- Air 194
- Microelectric 190-191
- Standard elec. 193

Materials

- Metals. 254-255
- Polymers 256
- Valve rotors. 257

Mounting hardware

- Closemount 208
- Standoff. 205

1/8" fittings, 1.0 mm ports (.040")

MW Type

SPECS
200 psi gas
200°C max
 Nitronic 60 body
 Valcon E rotor

Includes 2" standoff.
 Ask about closemount assembly if valve will not be heated.

Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

Low pressure


STF
Trap/ flow-throw

1/8" **1.0 mm**

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2STF6MWE	\$990	2STF10MWE	\$1075	2STF12MWE	\$1155	2STF16MWE	\$1155
With air actuator	A2STF6MWE	1235	A2STF10MWE	1320	A2STF12MWE	1400	A2STF16MWE	1400
With standard elec actuator	E2STF6MWE	1640	E2STF10MWE	1725	E2STF12MWE	1805	E2STF16MWE	1805
With microelectric actuator	EMT2STF6MWE	1860	EMT2STF10MWE	1945	EMT2STF12MWE	2025	EMT2STF16MWE	2025
Replacement valve	DSTF6MWE	830	DSTF10MWE	915	DSTF12MWE	995	DSTF16MWE	995
Replacement rotor	SSASTF6MWE	105	SSASTF10MWE	115	SSASTF12MWE	115	SSASTF16MWE	115


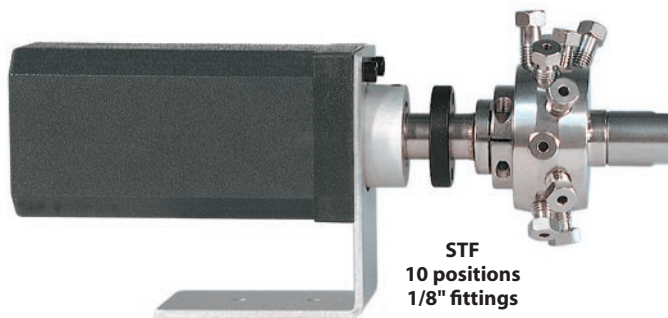


STF
10 positions
1/8" fittings

Selectors – High Pressure

Dead-end flowpath – SD configuration

SD valves select one of 4 to 16 dead-ended streams. The selected stream flows from the valve outlet to a sample valve, pressure sensor, detector, column, etc. This configuration may also be used to direct one stream to a number of outlets for applications such as fraction collection. For an application suggestion, see page 139.

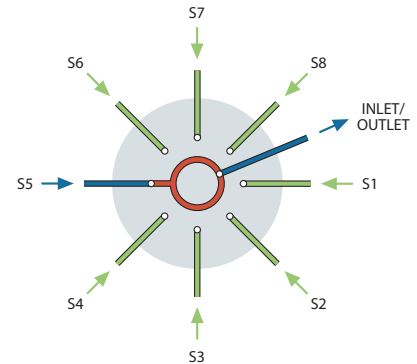

1/16" fittings, 0.4 mm ports (.016")

UW Type

5,000 psi

SD Dead-end

1/16" 0.40 mm

Standard electric actuators:
110 VAC for USA;
110/230 VAC to 24 VDC power supply for international

Microelectric actuators:
24 VDC (includes a 110/230 VAC to 24 VDC power supply)

SPECS
5000 psi
75°C max
Nitronic 60 body
Valcon E rotor

OPTIONS

- 8 and 12 positions available
- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Low pressure, high temperature versions available
- Larger bore available except 10 and 12 positions

	4 Position		6 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	CSD4UW	\$790	CSD6UW	\$845	CSD10UW	\$930
With air actuator	ACSD4UW	1035	ACSD6UW	1090	ACSD10UW	1175
With standard electric actuator	ECSD4UW	1440	ECSD6UW	1495	ECSD10UW	1580
With microelectric actuator	EMTCS4UW	1660	EMTCS6UW	1715	EMTCS10UW	1800
Replacement valve	DCSD4UW	630	DCSD6UW	685	DCSD10UW	770
Replacement rotor	SSACSD4UW	105	SSACSD6UW	105	SSACSD10UW	105

1/8" fittings, 0.75 mm ports (.030")

UW Type

5,000 psi

SD Dead-end

1/8" 0.75 mm

Standard electric actuators:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international


Microelectric actuators:
24 VDC (includes a 110/230 VAC to 24 VDC power supply)

SPECS
5000 psi liq
75°C max
Nitronic 60 body
Valcon E rotor

OPTIONS

- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see page 254-255)
- Low pressure, high temperature versions available
- Larger bore available except 8 position

	4 Position		6 Position		8 Position	
	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	SD4UW	\$790	SD6UW	\$845	SD8UW	\$930
With air actuator	ASD4UW	1035	ASD6UW	1090	ASD8UW	1175
With standard electric actuator	ESD4UW	1440	ESD6UW	1495	ESD8UW	1580
With microelectric actuator	EMTSD4UW	1660	EMTSD6UW	1715	EMTSD8UW	1800
Replacement valve	DSD4UW	630	DSD6UW	685	DSD8UW	770
Replacement rotor	SSASD4UW	105	SSASD6UW	105	SSASD8UW	105





SD
6 positions
1/8" fittings

Selectors – High Pressure

Both column ends selected – ST configuration

ST selectors are used for multi-column, multi-sample, or multi-trap operations. This valve can be used between an injector and detector to permit manual or automated HPLC column selection. For an application suggestion, see page 139.

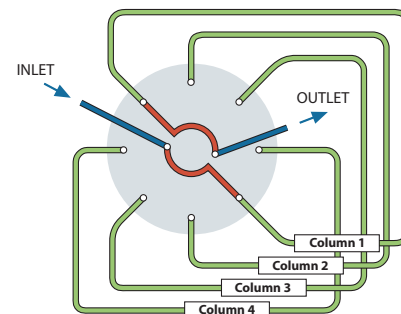

1/16" fittings, 0.4 mm ports (.016")

UW Type

SPECS
 5000 psi liq
 75°C max
 Nitronic 60 body
 Valcon E rotor

Manual versions are not available.

Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply).

5,000 psi

ST Trapping

1/16" 0.40 mm

OPTIONS

- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Low pressure, high temperature versions available. (Consult factory.)

	4 Columns or Loops		6 Columns or Loops	
	Prod No	Price	Prod No	Price
With air actuator	ACST4UW	\$1125	ACST6UW	\$1180
With standard electric actuator	ECST4UW	1530	ECST6UW	1585
With microelectric actuator	EMTCST4UW	1750	EMTCST6UW	1805
Replacement valve	DCST4UW	720	DCST6UW	775
Replacement rotor	SSACST4UW	105	SSACST6UW	105



ST
4 position
1/16" fittings

MORE INFORMATION

- Application page 139
- Actuators
 - Air 194
 - Microelectric . . . 190-191
 - Standard elec. 193
- Materials
 - Metals 254-255
 - Polymers 256
 - Valve rotors 257
- Mounting hardware
 - Closemount 208
 - Standoff 205

ABOUT LOOPS

- Other materials are available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.



1/16" Stainless steel loops

for UW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately. When a set of loops is ordered, loops will be supplied from the same lot.

Volume	Prod No	Price	Volume	Prod No	Price
10 µl	SL10CSTUW	\$23.75	250 µl	SL250CSTUW	\$28.75
15 µl	SL15CSTUW	23.75	500 µl	SL500CSTUW	32.50
20 µl	SL20CSTUW	23.75	1 ml	SL1KCSTUW	36.25
25 µl	SL25CSTUW	23.75	2 ml	SL2KCSTUW	46.25
50 µl	SL50CSTUW	23.75	5 ml	SL5KCSTUW	53.75
100 µl	SL100CSTUW	23.75	10 ml	SL10KCSTUW	70.00

Selector Applications

SD flowpath — low pressure


STREAM SELECTION WITH DEAD-ENDED STREAMS

SD valves select one of 4 to 16 dead-ended streams. The selected stream flows from the valve outlet to a sample valve, pressure sensor, detector, column, etc. The same configuration may also be used to direct one stream to a number of outlets for applications such as fraction collection.

This example illustrates automated sampling of non-pressurized containers.

1 A vacuum pump is used to move sample from the containers to a 6 port sampling valve. **2** The 3 port valve is used to block the vacuum flow through the sampling valve to allow the sample within the loop to equilibrate at atmospheric pressure. **3** The 6 port valve is then switched, injecting the sample. This method eliminates any possible effect from pressure differences among the containers, providing accurate and repeatable results. All three valves can be automated with air or electric actuators for unattended operation.


The SD flowpath isolates the unselected sample streams, but the potential exists for extraneous sample or contaminants to be in the lines when containers are first connected. To avoid problems, either prepurge each line or allow sufficient sampling time for the line to purge prior to injection.

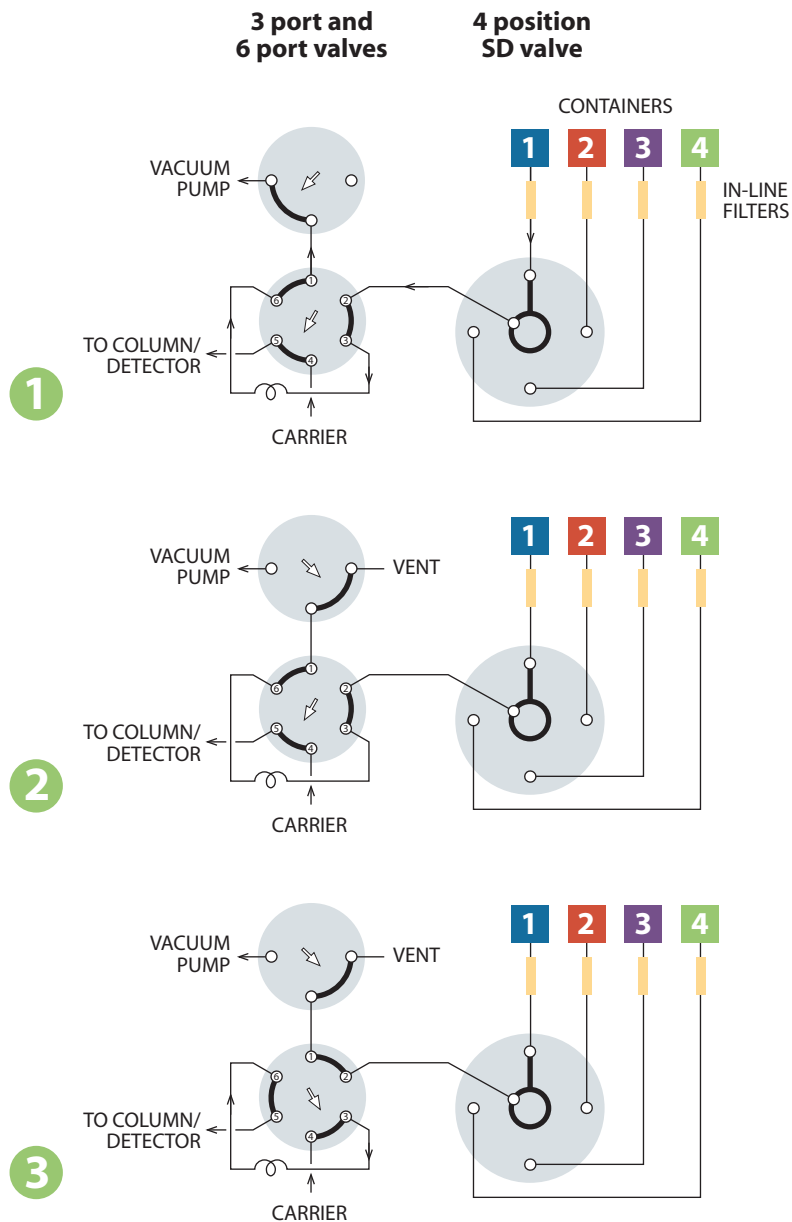

MORE INFORMATION

- SD prices
- Low pressure . . . 122-123
- High pressure 132
- Application
- High pressure SD . . . 139

SC flowpath

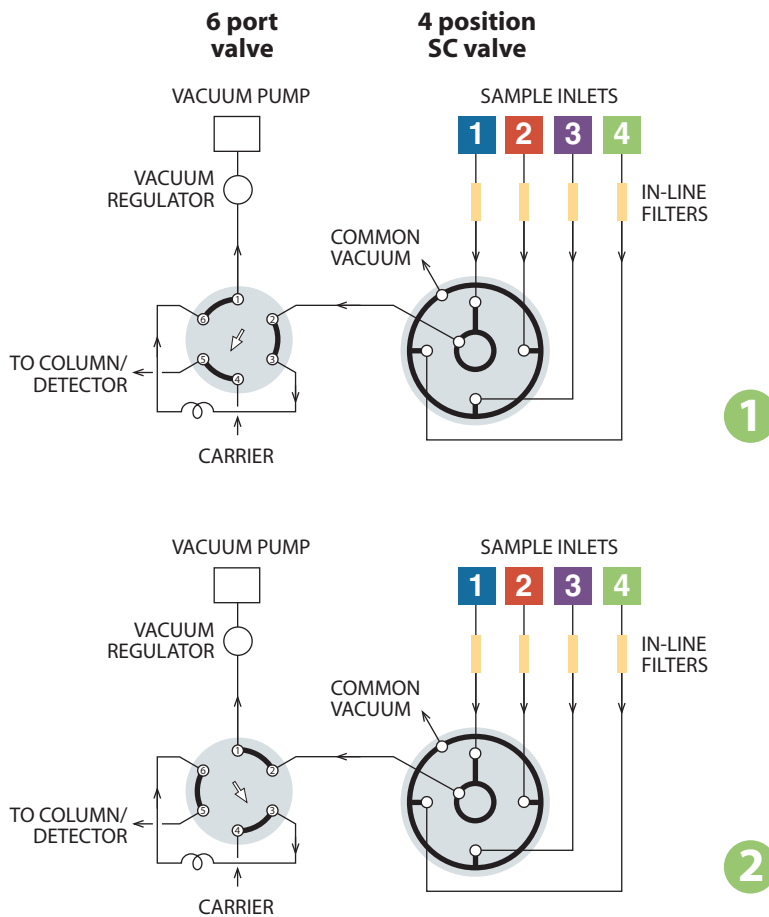

STREAM SELECTION WITH CONTINUOUS FLOW TO A COMMON OUTLET

SC selectors are similar to the SD configuration, except that instead of being dead-ended the non-selected streams flow to a common outlet. They are also available in 4, 6, 8, 10, 12, or 16 position versions.

The SC configuration is ideal for air quality monitoring, illustrated in this example.

The application is essentially the same as the one shown for the SD selectors on the previous page, except that the non-selected streams are continuously pulled through the valve, insuring that the most current sample will be provided as each point is selected for analysis. ① The sample loop on the 6 port valve is loaded from Stream 1. ② The 6 port valve is switched, injecting the sample. Both valves can be automated with air or electric actuators for unattended operation.

TECH TIP

Because the most common cause of valve failure is stray particulates entering the valve, we strongly recommend the use of in-line filters at sample entry points.

Our ZUFR filters feature inexpensive and easily replaceable low pressure drop filter screens (2 or 10 micron). The filters are available in 1/16", 1/8", and 1/4" standard, reducing, and bulkhead versions.

Filterspages 52

MORE INFORMATION

Actuators
 Air page 194
 Microelectric .. 190-191
 Standard elec. 193

SC prices 124-125

Selector Applications

SF flowpath


STREAM SELECTION WITH CONTINUOUS FLOW TO INDIVIDUAL OUTLETS

SD and SC valves select and isolate one of 4 to 16 streams, with the remainder dead-ended in the SD and flowing to a common outlet in the SC. The SF selector is similar, but carries the evolution a step further with the non-selected streams flowing through individual outlets.

This is the ideal solution when reactions or process streams with differing upstream pressures must be analyzed, and can also provide independent containment of toxic or noxious streams. An SF selector together with a 6 port sampling valve and pneumatic or electric actuators comprise a complete sampling system for the automated analysis of up to 16 sample points.


Note that streams 1 and 4 are vented while streams 2 and 3 are returned to their sources in this example.

Mode 1 shows sample loading from stream 4, while mode 2 shows sample injected onto the analytical column.

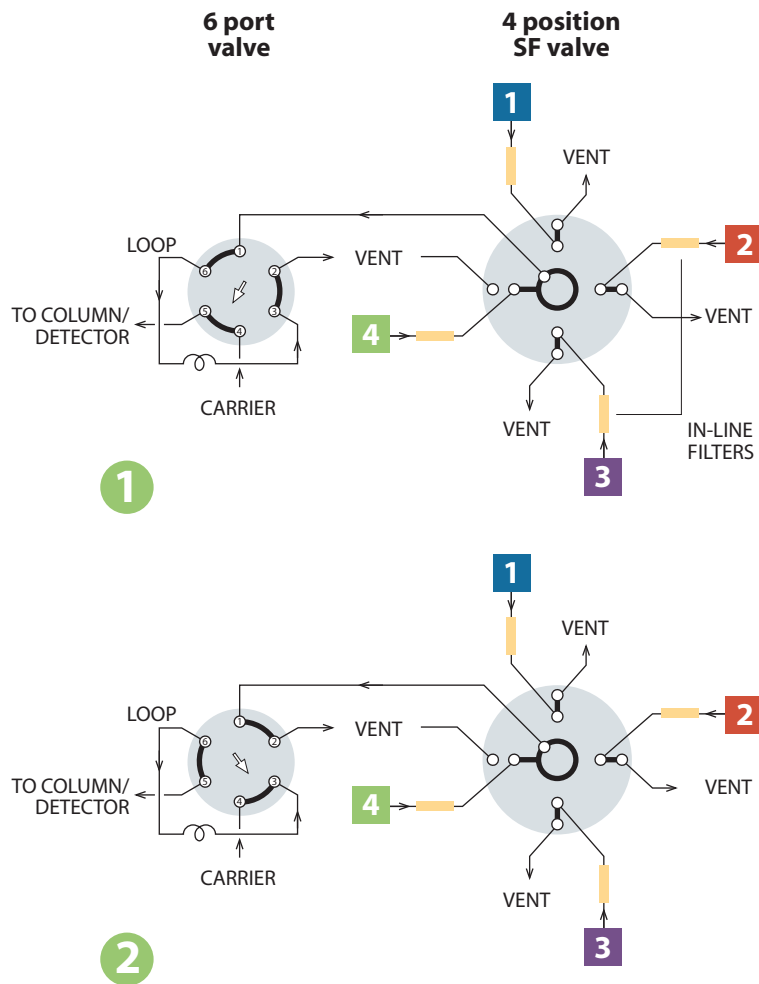

MORE INFORMATION
 Actuators
 Air page 194
 Microelectric .. 190-191
 Standard elec..... 193
 SF prices 126-127

ST flowpath — low pressure

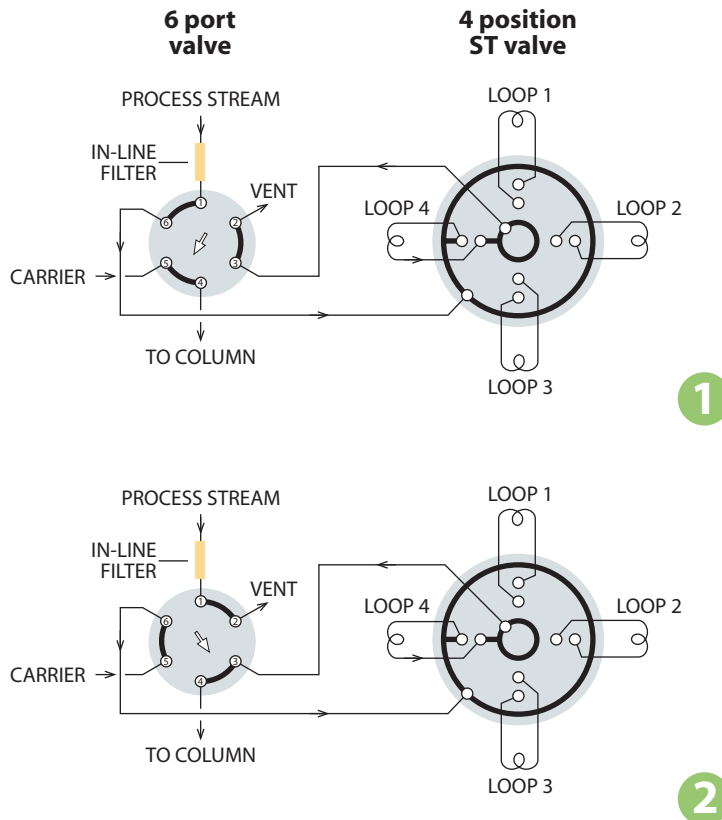

SAMPLE TRAPPING APPLICATIONS FOR 4 TO 16 STREAMS

ST selectors are used for multi-column, multi-sample, or multi-trap operations. The ST configuration is available in both MW and UW type designs.

A typical application, shown here, is the collection of fractions at timed intervals for analysis at a later time. Valves can be ordered with matched loops already installed.

In this example, the 6 port valve shown is used to select between **1** collection/trapping and **2** analysis/desorption. Both valves can be supplied with pneumatic or electric actuators to automate these functions.

MORE INFORMATION

- ST prices
- Low pressure . . . 128-129
- High pressure 133
- Application
- High pressure ST . . . 139

TECH TIP

Because the most common cause of valve failure is stray particulates entering the valve, we strongly recommend the use of in-line filters at sample entry points.

Our ZUFR filters feature inexpensive and easily replaceable low pressure drop filter screens (2 or 10 micron). The filters are available in 1/16", 1/8", and 1/4" standard, reducing, and bulkhead versions.

Filters page 52


Selector Applications

STF flowpath

SAMPLE TRAPPING WITH CONTINUOUS FLOW TO INDIVIDUAL OUTLETS

The STF selector is a variation of the ST flowpath, with the single difference that the non-selected streams are returned to their own vents or sources rather than being dead-ended or trapped as they are in the standard ST configuration. This is ideal for reactor processes in which removal of substantial amounts of sample would upset the equilibrium within the reactor, or if the stream is toxic or noxious and must be isolated.

An STF selector on an air or electric actuator along with a similarly equipped 6 port valve comprise a complete sampling system for the automated analysis of up to 16 sampling points.

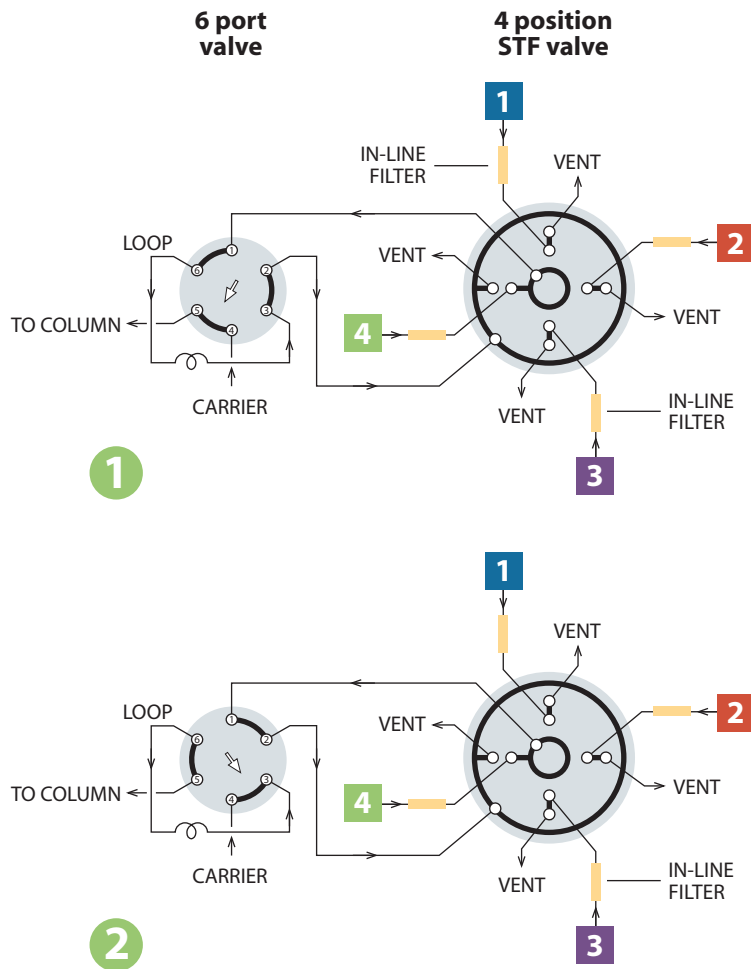

TECH TIP

Because the most common cause of valve failure is stray particulates entering the valve, we strongly recommend the use of in-line filters at sample entry points.

Our ZUFR filters feature inexpensive and easily replaceable low pressure drop filter screens (2 or 10 micron).


The filters are available in 1/16", 1/8", and 1/4" standard, reducing, and bulkhead versions.

MORE INFORMATION

Actuators
 Air page 194-195
 Microelectric .. 188-191
 Standard elec..... 193
 STF prices 130-131

Filters page 52


SD flowpath — high pressure

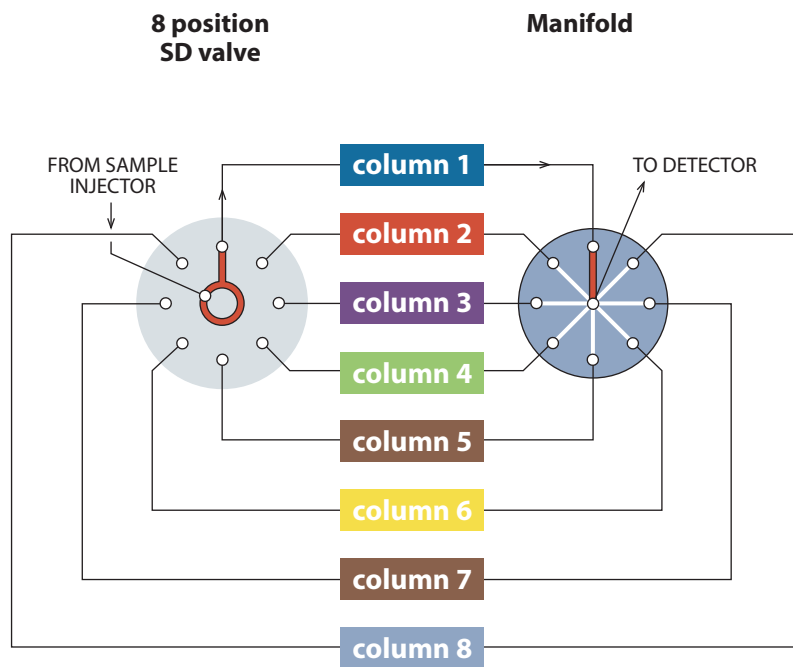

HPLC COLUMN SELECTION FOR UP TO 10 COLUMNS

This example illustrates an SD (UW type) selector used for HPLC column selection. This allows multiple columns to be installed permanently in the system, eliminating instrument downtime and leakage potential resulting from having to change columns repeatedly. The SDUW valve selects only column inlets – the column outlets are connected to the detector via a low-volume manifold. The manifold is sold separately.

ST flowpath — high pressure

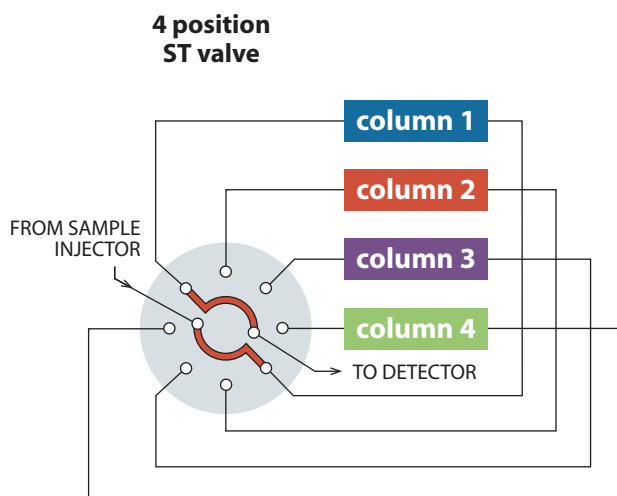


HPLC COLUMN SELECTION FOR 4 OR 6 COLUMNS

Up to 6 HPLC columns can be rapidly accessed by column selection valves, eliminating the instrument downtime involved in exchanging columns and the leakage due to repeated changing of tubing fittings. The columns are installed as a part of the loop system, as shown in this drawing. A 6 position valve can support 6 columns.

MORE INFORMATION

- Prices
 - SD high pressure ... 132
 - ST high pressure ... 133
- Application
 - Low pressure SD ... 134
 - Low pressure ST ... 137
 - Manifolds ... 33

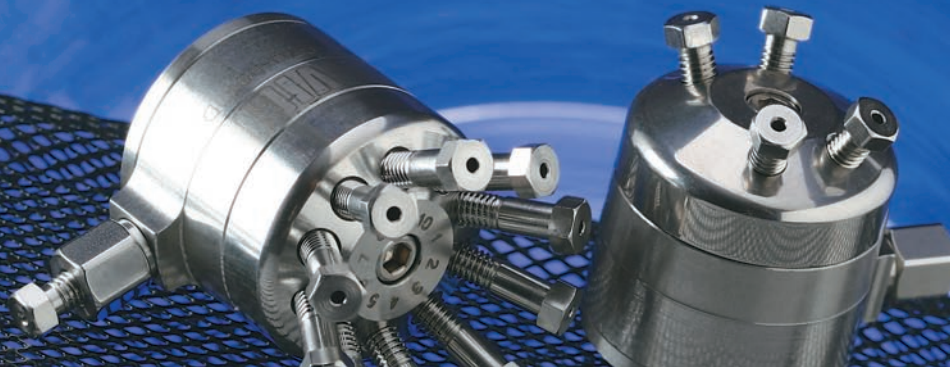

Diaphragm Valves


- Only 35 mm (1.375") in diameter
- >1,000,000 cycle lifetime
- Three configurations – 6 port, 10 port, and 4 port internal sample
- Built in actuator
- 1/16" or 1/32" Valco zero dead volume fittings

The VICI mini diaphragm valve is designed for trouble-free use in applications requiring minimal maintenance and maximum lifetime, making it an ideal choice for the process industry, automated lab analyzers, or continuous-monitoring environmental analyses.

Design

The mini diaphragm valve consists of plungers and ports arranged in a circular pattern, with the plungers

controlled by the reciprocation action of two air actuated pistons. Maintenance procedures are greatly simplified, since a single screw holds the valve together and locating pins ensure proper alignment. Extremely long lifetime, very short actuation time (10 milliseconds), minimum internal dead volume, and reliability have made this type of valve very successful in process gas chromatography for both sample injection and column switching.

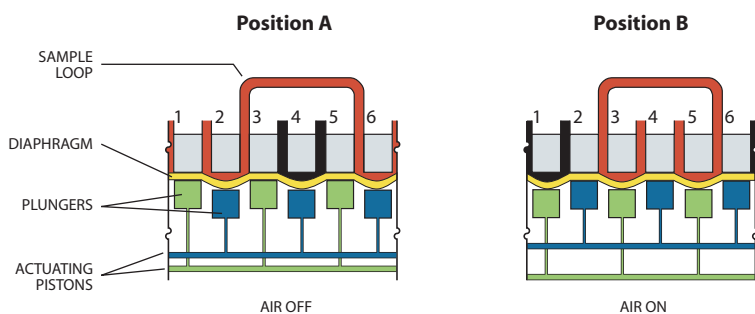

TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards. OD tolerance should be nominal dimension $\pm .002$ ".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500

Dimensions

Valve diameter is 35 mm (1.375"), height is 42 mm (1.625"), and weight is less than 255 g (9 oz).

Valve Fittings

The valve cap has Valco 1/32" or 1/16" ZDV fitting details – a rugged design which allows easy replacement of tubing or of the valve itself.

Standard bore size is 0.40 mm (.016"). Optional bore sizes are 0.25 mm (.010") and 0.75 mm (.030").

Lifetime

Diaphragm valve lifetime can exceed 1,000,000 cycles at ambient temperature or 500,000 cycles at 175°C.

Temperature/Pressure Specifications

The standard valve can be operated at temperatures up to 175°C, at 300 psi. The specially-formed diaphragm also permits sampling at subambient pressures.

Materials of Construction

The cap is Nitronic 60 stainless (optional Hastelloy C or Type 316 stainless), with remaining metal parts of 300 series stainless. The diaphragm is formed from a specialized polyimide.

Actuation

Actuator air (50-60 psi) is supplied to a side port with 10-32 female threads, permitting use of a variety of compression or barbed fittings. A 3-way solenoid is required for actuation. See information box below.

MORE INFORMATION**Materials**

Metals pp 254-255

Valve descriptions

Cheminert injectors and valves 144-149

Cheminert

selectors . . 144, 150-151

Valco injectors and

valves 96-99

Valco selectors . . 100-101

Valve prices

Cheminert HPLC. 152-163

Cheminert low

pressure 164-167

Cheminert

selectors 170-177

Valco GC 102-111

Valco HPLC 112-116

Valco selectors . . 122-133

ACTUATION

A 3-way solenoid is required for actuation.

31E1-120VAC \$120

31E1-220VAC 120

DIAPHRAGM VALVES

Ordering Information

Diaphragm valves, 1/32" fittings, 0.25 mm ports (.010")

Process GC
1/32" 0.25 mm

Includes stainless steel nuts and ferrules. A 3-way solenoid is required for actuation. Order separately.

SPECS

Internal sample:
750 psi liq
50°C max
Sampling/switching:
300 psi gas
175°C max
Nitronic 60 valve body
Polyimide diaphragm



4 port

.5 µl internal sample

Prod No Price

DV12-1114-.5 \$1200



4 port

1 µl internal sample

Prod No Price

DV12-1114-1 \$1200



6 port

sampling/switching

Prod No Price

DV12-1116 \$1200



10 port

multifunctional

Prod No Price

DV12-1110 \$1400

Diaphragm valves, 1/16" fittings, 0.40 mm ports (.016")

Process GC
1/16" 0.40 mm

Includes stainless steel nuts and ferrules. A 3-way solenoid is required for actuation. Order separately.

SPECS

Internal sample:
750 psi liq
50°C max
Sampling/switching:
300 psi gas
175°C max
Nitronic 60 valve body
Polyimide diaphragm

4 port

.5 µl internal sample

Prod No Price

DV22-2114-.5 \$1035

4 port

1 µl internal sample

Prod No Price

DV22-2114-1 \$1035

6 port

sampling/switching

Prod No Price

DV22-2116 \$1035

10 port

multifunctional

Prod No Price

DV22-2110 \$1200

Diaphragm valves, 1/16" fittings, 0.75 mm ports (.030")

Process GC
1/16" 0.75 mm

Includes stainless steel nuts and ferrules. A 3-way solenoid is required for actuation. Order separately.

SPECS

Internal sample:
750 psi liq
50°C max
Sampling/switching:
300 psi gas
175°C max
Nitronic 60 valve body
Polyimide diaphragm



6 port
1/16" fittings

4 port

.5 µl internal sample

Prod No Price

DV22-3114-.5 \$1035

4 port

1 µl internal sample

Prod No Price

DV22-3114-1 \$1035

6 port

sampling/switching

Prod No Price

DV22-3116 \$1035

10 port

multifunctional

Prod No Price

DV22-3110 \$1200

1/16" Stainless steel loops

for DV valves

Each loop includes two stainless steel nuts and ferrules. Order special fittings separately. For 1/32" loops, use NW loops (page 104).



Volume	Prod No	Price	Volume	Prod No	Price
2 µl	CSL2	\$22.50	250 µl	CSL250	\$31.25
5 µl	CSL5	22.50	500 µl	CSL500	31.25
10 µl	CSL10	22.50	1 ml	CSL1K	35.00
20 µl	CSL20	22.50	2 ml	CSL2K	45.00
50 µl	CSL50	22.50	5 ml	CSL5K	52.50
100 µl	CSL100	31.25	10 ml	CSL10K	68.75

Replacement diaphragms

Description	Prod No	Price
Polyimide diaphragm for .010" or .016"	DV22-21D	\$75.00
for .030"	DV22-31D	75.00
PTFE diaphragm	DV22-22D	57.50

MORE INFORMATION


More applications . . . pp 117-121

OPTIONS

■ Mounting kit
Use this ring to attach diaphragm valves to a surface.
Prod No Price
DVBRKIT \$20

■ Materials:
Hastelloy C
Type 316 stainless
For more information, refer to the metals discussion on pages 254-255 .


4 port sample injector

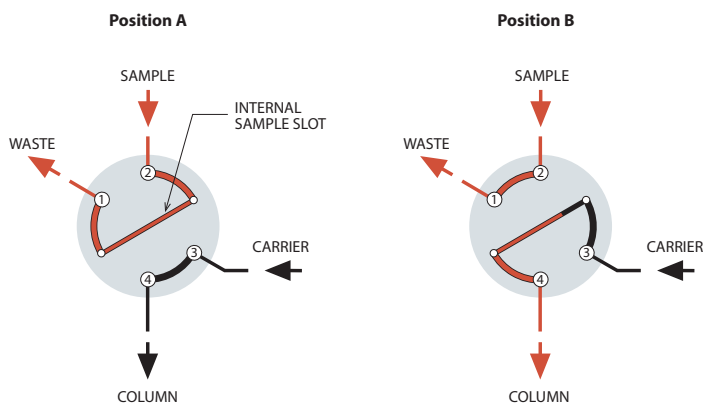

MICROVOLUME SAMPLE INJECTION

The internal sample (fixed volume) flowpath is used when very small sample volumes are required. The sample size is determined by a passage engraved on the valve cap, allowing precise, repeatable injections. In Position A, the sample flows through the sample passage while the carrier flows through to the column. In Position B, the sample passage is in line with the column and the carrier injects the contents of the sample passage into the column.

6 port sample injector

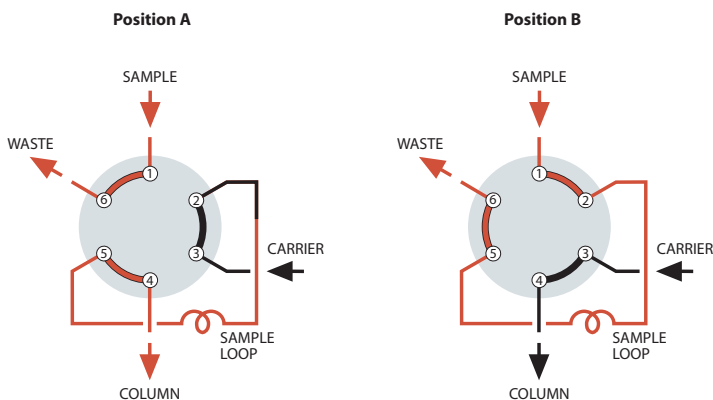


SAMPLE INJECTION

With the valve in Position A, sample flows through the external loop while the carrier flows directly through to the column. When the valve is switched to Position B, the sample contained in the sample loop and valve flow passage is injected into the column.

MORE INFORMATION

More applicationspages 118-119

10 port sample injector

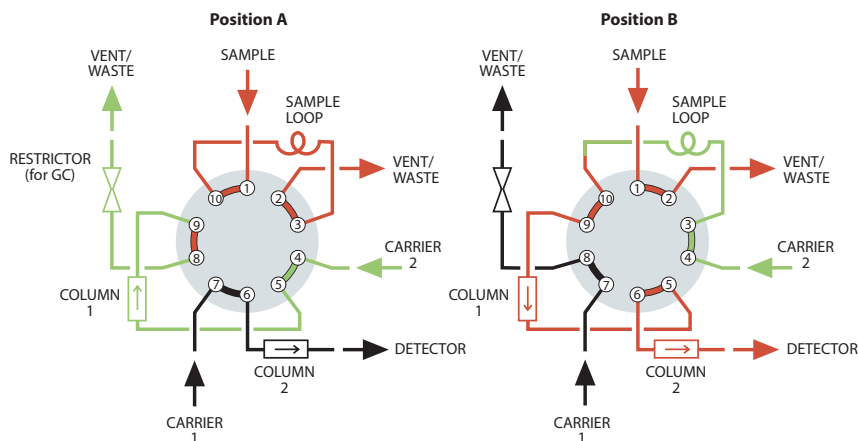

LOOP SAMPLING WITH BACKFLUSH OF PRE-COLUMN TO VENT

When components of interest are low boiling, this plumbing scheme allows "heavy" components with long retention times to be backflushed to waste. After the sample loop is loaded in Position A, the valve is switched to Position B to inject the sample into column 1. As soon as all components of interest have entered column 2, the valve is switched back to Position A. Column 1 is backflushed to vent during the analysis, reducing the total analysis time.

MORE INFORMATION

More applicationspages 120-121



Cheminert® Injectors and Valves

- Pressure ratings from 100 psi to 20,000 psi
- Inert, biocompatible construction
- Easy field service
- Automated operation – pneumatic or electric
- 4, 6, 8, and 10 port and internal sample two position models
- Multiposition stream selection versions with up to 26 positions

Design

The basic Cheminert design involves a flat rotor which is engraved with slots which connect the ports. A stator is held at a constant, preset force against the rotor. When repairs are required, all that is necessary for rotor access is the removal of two or three screws. Remove the old rotor and replace it, put the screws back in and tighten them, and the valve is ready for use at the factory-set pressure specification. No adjustments are possible, much less required. Other advantages of the design include easy panel mounting, low actuating torque, and compact size. The flat plate design offers flow paths for basic flow switching, sample injection, and stream selection up to 10 positions (26 positions in some models).

Two position valve descriptions, product numbers, and prices begin on page 146.

Selector (multiposition valve) information may be found on pages 150-151.


OEM injectors and selectors are on pages 178-185.

Materials of Construction

UHPLC models have stators of specially coated stainless steel, with PAEK rotors. **HPLC** models have stators of Nitronic 60 stainless steel, PAEK, Hastelloy C, or titanium, all of which are compatible with common HPLC solvents. Many are available with a proprietary long-life coating. Valcon H rotors are used with metal stators, and Valcon E with PAEK. **Low pressure** models have PPS stators and rotors of Valcon E2, a proprietary reinforced PTFE composite.

Metal valves are supplied with stainless nuts, with ferrules of the same material as the stator. Fittings for polymeric valves vary with the valve design. The valve price lists contain more detailed information.

Sample injection loops are available in a variety of materials, and are found on the pages with their corresponding valves.

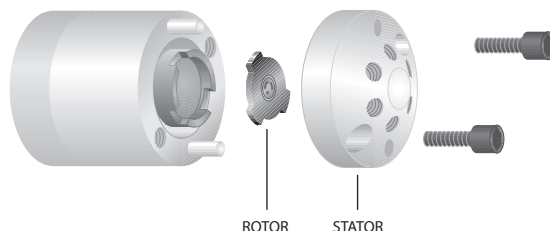

TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards. OD tolerance should be nominal dimension $\pm .002$ ".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500

Injectors and Switching Valves

The applications section beginning on pages 168-169 gives an overview of the many functions which can be performed by two position valves. Since the most common method of sample injection utilizes a 6 port valve with an external sample loop, 6 port valves are often referred to as "injectors". However, as the Applications section illustrates, 6 port valves can do more than inject sample, and 8 and 10 port valves can be sample injectors at the same time they're also used for backflushing or column switching.

One more variation is the 4 port internal sample injector, which is used when the sample size must be smaller than the smallest available loop. The internal sample "loop" is actually an engraved connecting slot on the rotor, sized to contain a specified amount of sample.

All these valves (except manual Models C1 and C1CF) are compatible with all VICI actuation options, with position feedback available for manual valves.

Stream Selectors (Multiposition Valves)

Selectors move in continuous revolutions by incremental steps, unlike the back and forth switching of two position valves. Each step selects one of 4 to 26 streams, directing it through the valve outlet to a sample valve, pressure sensor, detector, column, etc. The same valve can also direct one stream to a number of outlets for fraction collection.

In the standard models, the non-selected streams are dead-ended. However, some valves can be ordered with an optional rotor that returns each stream to its source. Consult the factory for more information.

MORE INFORMATION

Decoding
Cheminert valve
product no's... 264-265

Actuation 186-209

Applications . 168-169

Materials

Metals..... 254-255
Polymers256
Valve rotors.....257

Valve descriptions

Cheminert
injectors 146-149
selectors..... 150-151
nanovolume®..... 146
Diaphragm 140-141
Valco
injectors..... 99
selectors..... 100-101

Cheminert valve prices

HPLC 152-163
Low pressure .. 164-167
Nanovolume®
... 152-155, 170-171
Selectors 170-177
OEM..... 178-185


Nanovolume® HPLC Injectors and Switching Valves

Cheminert nanovolume injectors and switching valves are ideal for high speed, high throughput techniques which demand a valve and fitting system that minimize internal volume and eliminate dead volume. A proprietary rotor material and stator coating achieve pressures to 20,000 psi, suitable for the most demanding analytical techniques. All models are compatible with any VICI actuation option.



NEW Injectors with 360 micron fittings, 100 or 150 micron bore


Models C72MU and C72MX p. 152

- 360 µm Cheminert fittings 
- Choice of 100 or 150 µm flowpath
- 10,000, 15,000, and 20,000 psi versions
- 4, 6, 8, or 10 ports (4 or 6 in 20,000 psi versions)
- Coated stator

These injectors incorporate our unique fittings which permit direct connection of 360 micron OD fused silica, PEEK, stainless, or electroformed nickel tubing.


Injectors with 1/32" Cheminert fittings, 100 micron bore

Models CN2 and CN4 pp. 154-155

- 1/32" Cheminert fittings 
- 100 or 150 µm flowpath
- 5,000 psi rating
- 6 or 10 ports
- Internal sample version with sample size of 4, 10, or 20 nanoliters
- Uncoated PAEK stator

Injectors with 1/32" Valco fittings, 100 or 150 micron bore


Models C72NX and C74NX p. 153

- 1/32" Valco fittings 
- Choice of 100 or 150 µm flowpath
- 10,000, 15,000, and 20,000 psi versions
- 4, 6, 8, or 10 ports (4 or 6 in 20,000 psi versions)
- Internal sample version with sample size of 4, 10, or 20 nanoliters
- Coated stator

Selectors with 1/32" or 1/16" Valco fittings, 100 - 250 micron bore

Model C75NX p. 170

Model C75H p. 171


- 1/32" or 1/16" Valco fittings 
- 150 or 250 µm flowpath
- 10,000, 15,000, and 20,000 psi versions
- 4, 6, 8, or 10 positions (4 or 6 in 20,000 psi versions)
- Coated stator

UHPLC and HPLC Injectors and Switching Valves

NEW UHPLC Injectors and Switching Valves

New this year from VICI are UHPLC **Models C72X** and **C72H** valves, with pressure ratings of 15,000 psi and 10,000 psi, respectively. They can be used as injectors or switching valves.

Microbore **Models C74X** and **C74H** are equivalent internal volume sample injectors, with sample sizes ranging from 4 nanoliters to 50 nanoliters.



Model C72
page 156

15,000 psi

10,000 psi

HPLC Injectors and Switching Valves

Microbore

Model C2 valves can be used as injectors or switching valves.

Model C4 is an internal volume sample injector with sample sizes ranging from 10 nl to 50 nl.

Model C6 continuous flow injector is designed to maintain pump flow during most of the switching cycle, virtually eliminating pressure spikes.

Model C1 is a through-the-handle (front-loading) injector designed for direct replacement of existing competitive models. All Model C1 injectors are manual, with position feedback standard.

Model C1CF is a 6 port through-the-handle continuous flow injector. An engraving on the stator maintains pump flow between ports 5 and 4 during most of the switching cycle, virtually eliminating pressure spikes. Because the handle is integral to the design, all Model C1CF valves are manual, with position feedback standard.

Analytical

Models C2, C6, and **C1** are also available for analytical injection and switching, with port sizes of 0.40 mm (.016"). **Model C4** offers internal volume sample sizes ranging from 0.1 to 0.5 µl.

Semi-Preparative HPLC

Model C2 valves are available with flow passages optimized for semi-preparative HPLC. Choose from 4, 6, 8, or 10 port versions. Contact our sales or technical support departments for more information.

Autosampler Replacements

We supply direct replacements for injectors in many popular autosamplers. Call technical support to determine which replacement is best for your application.



Model C2
Microbore, page 158
Analytical, page 161

5,000 psi



Model C4
Microbore, page 159
Analytical, page 162


5,000 psi

Internal sample



Model C6
Microbore, page 160
Analytical, page 163

Continuous flow



Model C1
Microbore, page 160
Analytical, page 163

Through-handle

Low Pressure Injectors and Switching Valves


With Valco Zero Dead Volume (ZDV) Fittings

C20Z valves with zero dead volume fittings (10-32 thread) are shipped with standard PEEK nuts and ferrules. Zero dead volume fingertight fittings and nuts and ferrules of other materials may be ordered separately. Standard specifications are 100 psi gas/250 psi liquid at 75°C. On request, the pressure rating can be as high as 600 psi liquid.

Caution: Metal fittings will damage the threads and details of C20Z series valves. Use of metal fittings in a C20Z valve voids the warranty.


The **Model C22Z** is a conventional two position sample injector and switching valve, with 4, 6, 8, or 10 ports. Sample injection requires a loop, ordered separately.

The **Model C24Z** is an internal sample injector, for applications in which the sample size is smaller than that of any available external loop. Sample sizes available are 0.2, 0.5, and 1 µl.



Model C22Z
page 164

10-32 ZDV



Model C24Z
page 166

10-32 ZDV

Internal sample


With Cheminert 1/4-28 Fittings

C20 Series valve caps have female threads for direct connection of lines – no couplings are required. C20 Series valves are available in 4, 6, 8, and 10 port versions. Standard specifications are 100 psi gas/250 psi liquid at 75°C.

Multicolored Cheminert 1/4-28 flangeless fittings for 1/16" or 1/8" OD tubing (depending on the valve model) are included.

Model C22 valves are used for sample injection or switching. (Functionally equivalent to Model C22Z) Sample injection requires a loop, ordered separately.

The **Model C24** is an internal sample injector like the C24Z, available with 0.5, 1.0, or 2.0 µl sample size.



Model C22
page 165

1/4-28 Int.



Model C24
page 167

1/4-28 Int.

Internal sample

MORE INFORMATION

Decoding
Cheminert valve
product no's... 264-265

Actuation 186-209

Applications . 168-169

Materials

Metals..... 254-255
Polymers 256
Valve rotors..... 257

Valve descriptions

Cheminert
injectors 146-149
selectors 150-151
nanovolume®..... 146
Diaphragm 140-141
Valco
injectors 99
selectors 100-101

Cheminert valve prices

HPLC 152-163
Low pressure .. 164-167
Nanovolume®
..... 152-155, 170-171
Selectors 170-177
OEM..... 178-185



CAUTION

Metal fittings will damage the threads and details of C20Z series valves (models C22Z, C24Z, C25Z). Use of metal fittings in a C20Z valve voids the warranty.

TECH TIP

Our life tests indicate that these valves will typically give more than 100,000 cycles before requiring any service. This assumes that the fluid used is free of particulates and not reactive toward the valve components. If the stream may contain particulates, or if it has high salt content which could precipitate within the sample lines, use an in-line filter.
Note: Valves with purge ports are available on request.

Injectors for OEM Applications

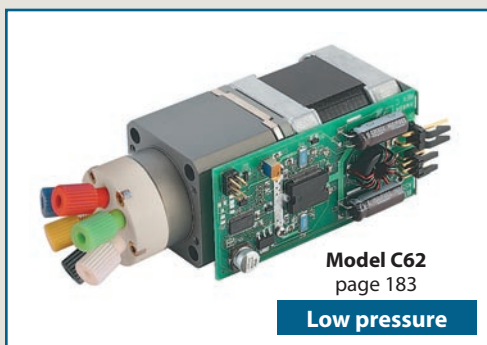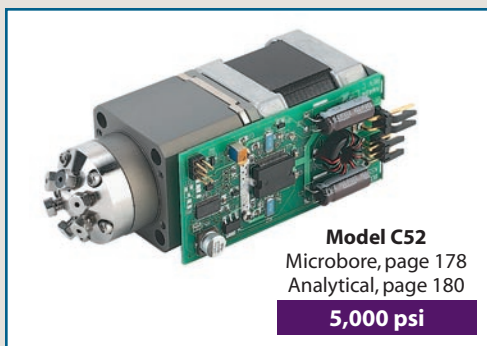

NEW Integrated Motor/Injector Assemblies for OEMs

Cheminert's new **Model C52** (HPLC) and **Model C62** (low pressure) injectors are integrated motor/valve assemblies designed specifically to be built into an OEM system. Using the well-proven Cheminert injector designs and the 24 volt motor from our popular microelectric actuators, the C52 and C62 need only to be connected to the instrument's power supply.

Control is simplified to require a single contact closure; the injector's position is determined by whether the closure is held high or low. There's even an easy way for the instrument to confirm the valve's position by sensing the output from a built-in sensor.

In the default control mode, a contact closure moves the injector from load to inject, where it remains until the contact is broken and the injector reverts to the load position. A simple jumper change shifts the mode to dual contact closure, in which one contact closure shifts the injector to inject and a second is required to shift it back to load. Jumper settings can also be modified to change the motor's degree of rotation so it can be used with any of the valve models available.


All these features are built into a compact and lightweight package and are available in 4, 6, 8, and 10 port configurations.

Autosampler and Other OEM Injectors



Model C3 is a unique injector with a syringe injection port centered on the rear face of the valve (opposite the handle or actuator), allowing convenient syringe insertion when the valve is mounted on an actuator inside an instrument.


Model C2V is designed specifically for use in an autosampler. It is like the standard C2 except that the sample port is perpendicular to the valve axis. This permits the valve and actuator to be installed horizontally, while the syringe loads the injector vertically.

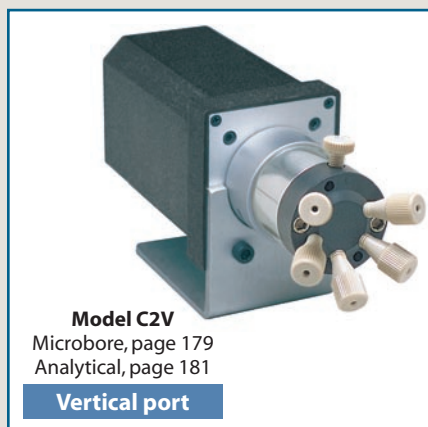

UNIVERSAL ACTUATOR

The new universal actuator for OEMs operates virtually any Valco or Cheminert rotary valve – two position and selector alike – greatly simplifying the electronic aspect of instrument design.
See page 192.

MODEL C1CF FLOWPATH

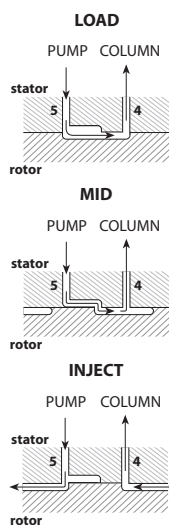

OEM SELECTOR VALVES

See pages 151, 184-185 for selector (multiposition) valves for OEMs.

Stream Selectors

UHPLC and High Pressure Selectors

NEW Model C75 selectors offer pressure ratings of 15,000 psi and 10,000 psi with 1/32" and 1/16" fittings.

The **Model C5**, with Valco ZDV fitting details, is available with 4, 6, 8, or 10 positions. Stators are available in Nitronic 60 stainless, titanium, and Hastelloy C-22, with rotors of Valcon H, all of which are compatible with common HPLC solvents. PAEK stators are used in combination with Valcon E rotors.

The C5 valve is the backbone of the Cheminert **HPLC column selector system**, which includes two stream selection valves mounted on a single microelectric actuator. Columns are not included.

Model C75
pages 170 and 171

15,000 psi

10,000 psi



Model C5
page 172

5,000 psi



HPLC column selector system
page 173

5,000 psi

Column selector system

Low Pressure Selectors

With Valco Zero Dead Volume Fittings

Model C25Z valves have Valco ZDV fitting details, and are available in 4, 6, 8, 10, 12, and 14 position models.

Model C35Z valves have 1/16" Valco ZDV details, and are available in 20, 24, and 26 position models. This is a tapered rotor valve limited to 100 psi liquid. Rotors are made from Valcon E2, with valve body made from PPS.

With Cheminert 1/4-28 Fittings

The **Model C25** has female 1/4-28 threaded fitting details for direct connection of lines – no couplings are required. The C25 is available in 4, 6, 8, and 10 position models. Multicolored Cheminert 1/16" or 1/8" flangeless fittings are included. Order other fittings separately as required. Rotors are made of Valcon E2, a proprietary reinforced PTFE composite, with stators of PPS.

With Cheminert 1/2-20 Fittings

Model C45 valves feature 1/2-20 threaded fitting details for use with 1/4" OD tubing. This is a tapered rotor valve with large bore for high flow applications. Rotors are made from Valcon E2, with valve body made from PPS. Available in 4 and 6 port configurations.



Model C25Z
page 174

Low pressure


10-32 ZDV



Model C25
page 175

Low pressure


1/4-28 Internal



Model C35Z
page 176

Low pressure

10-32 ZDV



Model C45
page 177

Low pressure

1/2-20 Int.

Stream Selectors for OEM Applications



NEW Integrated Motor/Stream Selectors for OEMs

Cheminert's new **Model C55** (HPLC) and **Model C65** (low pressure) stream selectors are integrated motor/valve assemblies designed specifically to be built into an OEM system. The compact, lightweight package is available in 4, 6, 8, and 10 position configurations.

Using the well-proven Cheminert stream selector design and the 24 volt motor from our popular microelectric actuators, the Models C55, C65, and C65Z need only to be connected to an instrument's power supply. A single momentary contact closure steps the valve to the next position; a separate

contact closure moves the valve to position 1 (Home).

See how our stream selectors can simplify your instrument design and minimize time to market – all while trimming your costs.

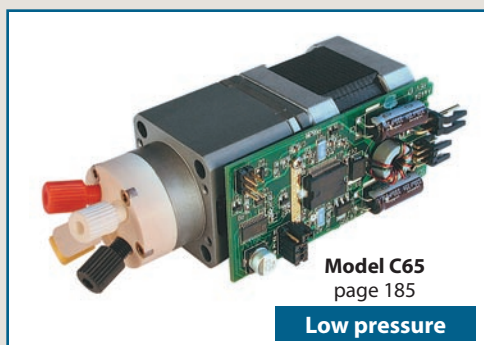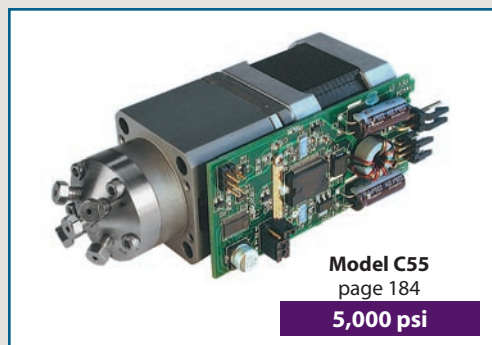

UNIVERSAL ACTUATOR

The new universal actuator for OEMs operates virtually any Valco or Cheminert rotary valve – two position and selector alike – greatly simplifying the electronic aspect of instrument design.

See page 192.

MORE INFORMATION

Actuation 186-209

Applications . 168-169

Materials

Metals..... 254-255
Polymers256
Valve rotors.....257

Valve descriptions

Cheminert
injectors 146-149
selectors 150-151
nanovolume®..... 146
Diaphragm 140-141
Valco
injectors 99
selectors 100-101

Cheminert valve prices

HPLC 152-163
Low pressure .. 164-167
Nanovolume®
..... 152-155, 170-171
Selectors 170-177
OEM 178-185

TECH TIP

Caution:

Metal fittings will damage the threads and details of C25Z, C35Z, and C65Z series valves.

Use of metal fittings in these valves voids the warranty.

SPECIFICATIONS

CHEMINERT MULTIPOSITION VALVES

Model	Stator material	Std rotor material	Max pressure	Max temp	Number of positions
High Pressure					
C5	Metal	Valcon H	5000 psi liq	75°C	4, 6, 8, 10
	PAEK	Valcon E	5000 psi liq	50°C	4, 6, 8, 10
Low Pressure					
C25Z	PPS	Valcon E2	100 psi gas/ 250 psi liq	75°C	4, 6, 8, 10, 12, 14
C25	PPS	Valcon E2	100 psi gas/ 250 psi liq	75°C	4, 6, 8, 10
C35Z	PPS	Valcon E2	100 psi liq	50°C	20, 24, 26
C45	PPS	Valcon TF	100 psi liq	50°C	4, 6, 8
OEM – High Pressure					
C55	Metal	Valcon H	5000 psi liq	50°C	4, 6, 8, 10
	PAEK	Valcon E	5000 psi liq	50°C	4, 6, 8, 10
OEM – Low Pressure					
C65Z	PPS	Valcon E2	100 psi gas/ 250 psi liq	50°C	4, 6, 8, 10
C65	PPS	Valcon E2	100 psi gas/ 250 psi liq	50°C	4, 6, 8, 10

PORT DIAMETERS

Model	Fitting size	Standard port diameter
-------	--------------	------------------------

High Pressure

C5	1/16" ZDV	0.15 mm (.006") 0.25 mm (.010") 0.40 mm (.016") 0.75 mm (.030")
----	-----------	--

Low Pressure

C25Z	1/16" ZDV	0.75 mm (.030")
C25	1/4-28 for 1/16" tubing	0.75 mm (.030")
	1/4-28 for 1/8" tubing	1.50 mm (.060")
C35Z	1/16" ZDV	0.75 mm (.030")
C45	1/2-20 for 1/4" tubing	4.6 mm (.180")

OEM – High Pressure

C55	1/16" ZDV	0.25 mm (.010") 0.40 mm (.016") 0.75 mm (.030")
-----	-----------	---

OEM – Low Pressure

C65Z	1/16" ZDV	0.75 mm (.030")
C65	1/4-28 for 1/16" tubing	0.75 mm (.030")
	1/4-28 for 1/8" tubing	1.50 mm (.060")

NEW UHPLC Nanovolume Injectors with 360 µm fittings

NEW 20,000 psi UHPLC Nanovolume valves 360 micron fittings, 100 micron bore (.004")

Model C72MU

20,000 psi
360µm **100 µm**

Includes stainless
360 micron fittings.

Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply.



4 Port



6 Port

	Prod No	Price	Prod No	Price
--	---------	-------	---------	-------

Coated stainless stator

Manual	C72MU-4694	\$1540	C72MU-4696	\$1540
With pneumatic actuator	C72MU-4694A	1790	C72MU-4696A	1790
With standard electric actuator	C72MU-4694E	2110	C72MU-4696E	2110
With microelectric actuator	C72MU-4694EH	2280	C72MU-4696EH	2280
Replacement valve	C72MU-4694D	1540	C72MU-4696D	1540
Replacement rotor	C72M-46R4	95	C72M-46R6	95
Replacement stator	C72M-4C94	1090	C72M-4C96	1090

SPECS

20,000 psi liq
50°C max
Stainless w/ inert coating
stator
Valcon E3 rotor

OPTIONS

- 150 micron (.006") bore
- Internal sample injector (4 - 20 nl)
- 10,000 and 15,000 psi versions available



Model C72MU
360 micron fittings
(Model C72MX is similar)

NEW 15,000 psi UHPLC Nanovolume valves 360 micron fittings, 150 micron bore (.006")

Model C72MX

15,000 psi
360µm **150 µm**

Includes stainless
360 micron fittings.

Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply.



6 Port



10 Port

	Prod No	Price	Prod No	Price
--	---------	-------	---------	-------

Coated stainless stator

Manual	C72MX-6696	\$1240	C72MX-6690	\$1340
With pneumatic actuator	C72MX-6696A	1490	C72MX-6690A	1590
With standard electric actuator	C72MX-6696E	1810	C72MX-6690E	1910
With microelectric actuator	C72MX-6696EH	1980	C72MX-6690ED	2140
Replacement valve	C72MX-6696D	1240	C72MX-6690D	1340
Replacement rotor	C72M-66R6	95	C72M-66R0	95
Replacement stator	C72M-6C96	940	C72M-6C90	1040

SPECS

15,000 psi liq
50°C max
Stainless w/ inert coating
stator
Valcon E3 rotor

OPTIONS

- 100 micron (.004") bore
- Internal sample injector (4 - 20 nl)
- 10,000 psi version available
- 4 and 8 port versions available




MORE INFORMATION

360 micron nanovolume fittings page 58

UHPLC Nanovolume Injectors with 1/32" Valco stainless fittings *NEW*

***NEW* 15,000 psi UHPLC Nanovolume valves**
1/32" Valco stainless fittings, 150 micron bore (.006")

Model C72NX

<p>SPECS 15,000 psi liq 50°C max Stainless w/ inert coating stator Valcon E3 rotor</p>	<p>Includes 1/32" Valco stainless steel fittings.</p> 	<p>Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.</p>	<p>* The 6 port valve includes a 5 µl loop of the stator material.</p>	15,000 psi																												
				1/32"	150 µm																											
		 <p>6 Port *</p>	 <p>10 Port</p>																													
		<table border="0"> <tr> <th>Prod No</th> <th>Price</th> <th>Prod No</th> <th>Price</th> </tr> </table>	Prod No	Price	Prod No	Price																										
Prod No	Price	Prod No	Price																													
<p>OPTIONS</p> <ul style="list-style-type: none"> ■ 100 micron (.004") bore ■ 250 micron (.010") bore ■ 10,000 psi version available ■ 4 and 8 port versions available 	<p>Coated stainless stator</p> <p>Manual With pneumatic actuator</p> <p>With standard electric actuator With microelectric actuator</p> <p>Replacement valve Replacement rotor Replacement stator</p>	<table border="0"> <tr> <td>C72NX-6696</td> <td>\$1140</td> <td>C72NX-6690</td> <td>\$1240</td> </tr> <tr> <td>C72NX-6696A</td> <td>1390</td> <td>C72NX-6690A</td> <td>1490</td> </tr> <tr> <td>C72NX-6696E</td> <td>1710</td> <td>C72NX-6690E</td> <td>1810</td> </tr> <tr> <td>C72NX-6696EH</td> <td>1880</td> <td>C72NX-6690ED</td> <td>2040</td> </tr> <tr> <td>C72NX-6696D</td> <td>1140</td> <td>C72NX-6690D</td> <td>1240</td> </tr> <tr> <td>C72N-66R6</td> <td>95</td> <td>C72N-66R0</td> <td>95</td> </tr> <tr> <td>C72N-6C96</td> <td>840</td> <td>C72N-6C90</td> <td>940</td> </tr> </table>	C72NX-6696	\$1140	C72NX-6690	\$1240	C72NX-6696A	1390	C72NX-6690A	1490	C72NX-6696E	1710	C72NX-6690E	1810	C72NX-6696EH	1880	C72NX-6690ED	2040	C72NX-6696D	1140	C72NX-6690D	1240	C72N-66R6	95	C72N-66R0	95	C72N-6C96	840	C72N-6C90	940		
C72NX-6696	\$1140	C72NX-6690	\$1240																													
C72NX-6696A	1390	C72NX-6690A	1490																													
C72NX-6696E	1710	C72NX-6690E	1810																													
C72NX-6696EH	1880	C72NX-6690ED	2040																													
C72NX-6696D	1140	C72NX-6690D	1240																													
C72N-66R6	95	C72N-66R0	95																													
C72N-6C96	840	C72N-6C90	940																													



Model C72NX
 1/32" Valco stainless fittings

Sample loops for C72NX valves

Each stainless loop includes two stainless 1/32" Cheminert nanovolume fittings.



Stainless		
Volume	Prod No	Price
1 µl	CSLN1K	\$35.00
2 µl	CSLN2K	45.00
5 µl	CSLN5K	52.50



Model C74NX
 1/32" Valco stainless fittings

***NEW* 15,000 psi UHPLC Nanovolume internal sample injectors**
1/32" Valco stainless fittings, 150 micron bore (.006")

Model C74NX

<p>SPECS 15,000 psi liq 50°C max Stainless w/ inert coating stator Valcon E3 rotor</p>	<p>Includes 1/32" Valco stainless steel fittings.</p> 	<p>Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.</p>		15,000 psi																																										
				Internal sample																																										
				1/32"	150 µm																																									
		<table border="0"> <tr> <th colspan="2">4 nanoliters</th> <th colspan="2">10 nanoliters</th> <th colspan="2">20 nanoliters</th> </tr> <tr> <th>Prod No</th> <th>Price</th> <th>Prod No</th> <th>Price</th> <th>Prod No</th> <th>Price</th> </tr> </table>	4 nanoliters		10 nanoliters		20 nanoliters		Prod No	Price	Prod No	Price	Prod No	Price																																
4 nanoliters		10 nanoliters		20 nanoliters																																										
Prod No	Price	Prod No	Price	Prod No	Price																																									
<p>OPTIONS</p> <ul style="list-style-type: none"> ■ 250 micron (.010") bore ■ 10,000 and 20,000 psi versions available 	<p>Coated stainless stator</p> <p>Manual With pneumatic actuator</p> <p>With standard electric actuator With microelectric actuator</p> <p>Replacement valve Replacement rotor Replacement stator</p>	<table border="0"> <tr> <td>C74NX-6694-.004</td> <td>\$1140</td> <td>C74NX-6694-.01</td> <td>\$1140</td> <td>C74NX-6694-.02</td> <td>\$1140</td> </tr> <tr> <td>C74NX-6694-.004A</td> <td>1390</td> <td>C74NX-6694-.01A</td> <td>1390</td> <td>C74NX-6694-.02A</td> <td>1390</td> </tr> <tr> <td>C74NX-6694-.004E</td> <td>1710</td> <td>C74NX-6694-.01E</td> <td>1710</td> <td>C74NX-6694-.02E</td> <td>1710</td> </tr> <tr> <td>C74NX-6694-.004EH</td> <td>1880</td> <td>C74NX-6694-.01EH</td> <td>1880</td> <td>C74NX-6694-.02EH</td> <td>1880</td> </tr> <tr> <td>C74NX-6694-.004D</td> <td>1140</td> <td>C74NX-6694-.01D</td> <td>1140</td> <td>C74NX-6694-.02D</td> <td>1140</td> </tr> <tr> <td>C74N-66R-.004</td> <td>95</td> <td>C74N-66R-.01</td> <td>95</td> <td>C74N-66R-.02</td> <td>95</td> </tr> <tr> <td>C74N-6C9</td> <td>840</td> <td>C74N-6C9</td> <td>840</td> <td>C74N-6C9</td> <td>840</td> </tr> </table>	C74NX-6694-.004	\$1140	C74NX-6694-.01	\$1140	C74NX-6694-.02	\$1140	C74NX-6694-.004A	1390	C74NX-6694-.01A	1390	C74NX-6694-.02A	1390	C74NX-6694-.004E	1710	C74NX-6694-.01E	1710	C74NX-6694-.02E	1710	C74NX-6694-.004EH	1880	C74NX-6694-.01EH	1880	C74NX-6694-.02EH	1880	C74NX-6694-.004D	1140	C74NX-6694-.01D	1140	C74NX-6694-.02D	1140	C74N-66R-.004	95	C74N-66R-.01	95	C74N-66R-.02	95	C74N-6C9	840	C74N-6C9	840	C74N-6C9	840		
C74NX-6694-.004	\$1140	C74NX-6694-.01	\$1140	C74NX-6694-.02	\$1140																																									
C74NX-6694-.004A	1390	C74NX-6694-.01A	1390	C74NX-6694-.02A	1390																																									
C74NX-6694-.004E	1710	C74NX-6694-.01E	1710	C74NX-6694-.02E	1710																																									
C74NX-6694-.004EH	1880	C74NX-6694-.01EH	1880	C74NX-6694-.02EH	1880																																									
C74NX-6694-.004D	1140	C74NX-6694-.01D	1140	C74NX-6694-.02D	1140																																									
C74N-66R-.004	95	C74N-66R-.01	95	C74N-66R-.02	95																																									
C74N-6C9	840	C74N-6C9	840	C74N-6C9	840																																									

MORE INFORMATION
 1/32" Valco fittings pages 10, 12
 1/16" nanovolume injectors
 C72X 156
 C74X 157

Nanovolume Injectors with 1/32" Cheminert Fittings

5,000 psi Nanovolume valves, 1/32" Cheminert fittings, 100 micron ports (.004")

Model CN2

5,000 psi

1/32"

100 µm

Includes 1/32" PEEK Cheminert nanovolume fittings.

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

* The 6 port valve includes a 250 nl PEEK loop.



6 Port*



10 Port

Prod No Price Prod No Price


PAEK stator

Manual	CN2-4346	\$1055	CN2-4340	\$1165
With microelectric actuator	CN2-4346EH	1795	CN2-4340EH	1905
Replacement valve	CN2-4346D	1055	CN2-4340D	1165
Replacement rotor	CN2-43R6	92	CN2-43R0	92
Replacement stator	CN2-4C46I	595	CN2-4C40I	680

SPECS
5000 psi liq
50°C max
PAEK stator
Valcon E rotor

OPTIONS

- 150 micron (.006") bore



Model CN2
1/32" Cheminert
fittings

Sample loops *for CN2 valves*

Each PEEK loop includes two PEEK Cheminert nanovolume fittings.

Volume	PEEK Prod No	Price
250 nl	CNSL250PK	\$37.50
500 nl	CNSL500PK	37.50
1 µl	CNSL1KPK	37.50
2 µl	CNSL2KPK	37.50
5 µl	CNSL5KPK	37.50



MORE INFORMATION

1/32" PEEK Cheminert fitting (nut with collapsible ferrule) p.59

Nanovolume Injectors with 1/32" Cheminert Fittings

5,000 psi Nanovolume internal sample injector, 1/32" Cheminert fittings, 100 micron ports (.004")

Model CN4

SPECS
5000 psi liq
50°C max
PAEK stator
Valcon E rotor

Includes 1/32" PEEK Cheminert nanovolume fittings.



Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply.



5,000 psi

Internal sample

1/32"

100 µm

OPTIONS

- 150 micron (.006") bore

Sample volume

4 nanoliters

10 nanoliters

20 nanoliters

PAEK stator

	4 nanoliters		10 nanoliters		20 nanoliters	
	Prod No	Price	Prod No	Price	Prod No	Price
Manual	CN4-4344-.004	\$1055	CN4-4344-.01	\$1055	CN4-4344-.02	\$1055
With microelectric actuator	CN4-4344-.004EH	1795	CN4-4344-.01EH	1795	CN4-4344-.02EH	1795
Replacement valve	CN4-4344-.004D	1055	CN4-4344-.01D	1055	CN4-4344-.02D	1055
Replacement rotor	CN4-43R-.004	92	CN4-43R-.01	92	CN4-43R-.02	92
Replacement stator	CN4-4C4I	595	CN4-4C4I	595	CN4-4C4I	595



Model CN4
1/32" Cheminert fittings

MORE INFORMATION

1/32" PEEK Cheminert fitting (nut with collapsible ferrule) p.59

Microbore UHPLC

NEW 15,000 psi UHPLC microbore valves, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C72X

15,000 psi
Microbore
1/16" 0.25 mm

Includes stainless steel nuts and ferrules.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international.
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply.

* The 6 port valve includes a 5 µl stainless steel sample loop.

SPECS
15,000 psi liq
50°C max
Stainless stator with inert coating
Valcon E3 rotor



4 Port



6 Port*



8 Port



10 Port

	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C72X-1694	\$940	C72X-1696	\$940	C72X-1698	\$990	C72X-1690	\$1040
With pneumatic actuator	C72X-1694A	1190	C72X-1696A	1190	C72X-1698A	1240	C72X-1690A	1290
With standard electric actuator	C72X-1694E	1510	C72X-1696E	1510	C72X-1698E	1560	C72X-1690E	1610
With microelectric actuator	C72X-1694EH	1680	C72X-1696EH	1680	C72X-1698ED	1790	C72X-1690ED	1840
Replacement valve	C72X-1694D	940	C72X-1696D	940	C72X-1698D	990	C72X-1690D	1040
Replacement rotor	C72-16R4	95	C72-16R6	95	C72-16R8	95	C72-16R0	95
Replacement stator	C72-1C94	640	C72-1C96	640	C72-1C98	690	C72-1C90	740

OPTIONS
0.15 mm ports (.006")

NEW 10,000 psi UHPLC microbore valves, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C72H

10,000 psi
Microbore
1/16" 0.25 mm

Includes stainless steel nuts and ferrules.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international.
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply.

* The 6 port valve includes a 5 µl stainless steel sample loop.

SPECS
10,000 psi liq
50°C max
Stainless stator with inert coating
Valcon E3 rotor



4 Port



6 Port*



8 Port



10 Port

	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C72H-1694	\$790	C72H-1696	\$790	C72H-1698	\$840	C72H-1690	\$890
With pneumatic actuator	C72H-1694A	1040	C72H-1696A	1040	C72H-1698A	1090	C72H-1690A	1140
With standard electric actuator	C72H-1694E	1360	C72H-1696E	1360	C72H-1698E	1410	C72H-1690E	1460
With microelectric actuator	C72H-1694EH	1530	C72H-1696EH	1530	C72H-1698ED	1640	C72H-1690ED	1690
Replacement valve	C72H-1694D	790	C72H-1696D	790	C72H-1698D	840	C72H-1690D	890
Replacement rotor	C72-16R4	95	C72-16R6	95	C72-16R8	95	C72-16R0	95
Replacement stator	C72-1C94	640	C72-1C96	640	C72-1C98	690	C72-1C90	740

OPTIONS
0.15 mm ports (.006")

Stainless steel sample loops *for C72X and C72H valves*

Each loop includes two stainless steel nuts and ferrules.
Metal loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

Volume	Prod No	Price	Volume	Prod No	Price	Volume	Prod No	Price
2 µl	CSL2	\$22.50	50 µl	CSL50	\$22.50	1 ml	CSL1K	\$35.00
5 µl	CSL5	22.50	100 µl	CSL100	31.25	2 ml	CSL2K	45.00
10 µl	CSL10	22.50	250 µl	CSL250	31.25	5 ml	CSL5K	52.50
20 µl	CSL20	22.50	500 µl	CSL500	31.25	10 ml	CSL10K	68.75



Model C72H
(C72X similar)
1/16" ZDV fittings

NEW 15,000 psi UHPLC microbore internal sample injectors, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C74X

SPECS

15,000 psi liq
50°C max
Stainless stator
with inert coating
Valcon E3 rotor

Includes stainless steel
nuts and ferrules.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for
international.
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply.



15,000 psi

Microbore

Internal sample

1/16" 0.25 mm

OPTIONS

0.15 mm ports (.006")

	10 nanoliters		20 nanoliters		50 nanoliters	
	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C74X-1694-.01	\$940	C74X-1694-.02	\$940	C74X-1694-.05	\$940
With pneumatic actuator	C74X-1694-.01A	1190	C74X-1694-.02A	1190	C74X-1694-.05A	1190
With standard electric actuator	C74X-1694-.01E	1510	C74X-1694-.02E	1510	C74X-1694-.05E	1510
With microelectric actuator	C74X-1694-.01EH	1680	C74X-1694-.02EH	1680	C74X-1694-.05EH	1680
Replacement valve	C74X-1694-.01D	940	C74X-1694-.02D	940	C74X-1694-.05D	940
Replacement rotor	C74-16R-.01	95	C74-16R-.02	95	C74-16R-.05	95
Replacement stator	C74-1C9	640	C74-1C9	640	C74-1C9	640

NEW 10,000 psi UHPLC microbore internal sample injectors, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C74H

SPECS

10,000 psi liq
50°C max
Stainless stator
with inert coating
Valcon E3 rotor

Includes stainless steel
nuts and ferrules.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for
international.
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply.



10,000 psi

Microbore

Internal sample

1/16" 0.25 mm

OPTIONS

0.15 mm ports (.006")

	10 nanoliters		20 nanoliters		50 nanoliters	
	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C74H-1694-.01	\$790	C74H-1694-.02	\$790	C74H-1694-.05	\$790
With pneumatic actuator	C74H-1694-.01A	1040	C74H-1694-.02A	1040	C74H-1694-.05A	1040
With standard electric actuator	C74H-1694-.01E	1360	C74H-1694-.02E	1360	C74H-1694-.05E	1360
With microelectric actuator	C74H-1694-.01EH	1530	C74H-1694-.02EH	1530	C74H-1694-.05EH	1530
Replacement valve	C74H-1694-.01D	790	C74H-1694-.02D	790	C74H-1694-.05D	790
Replacement rotor	C74-16R-.01	95	C74-16R-.02	95	C74-16R-.05	95
Replacement stator	C74-1C9	640	C74-1C9	640	C74-1C9	640

MORE INFORMATION

Actuators

Air page 195
Microelectric .. 188-189
Standard electric ... 193

Materials

Metals..... 254-255
Polymers 256
Valve rotors..... 257

Standoff

assemblies 205-207



Model C74H
(C74X similar)
1/16" ZDV fittings

Microbore HPLC

Microbore valves, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C2

5,000 psi

Microbore

1/16" 0.25 mm

Includes stainless steel nuts and ferrules of the stator material. Valves with PAEK stators have PEEK nuts and ferrules.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply.

* The 6 port valve includes a 5 µl loop of the stator material.

SPECS
5000 psi liq
75°C max
Metal stator
Valcon H rotor

5000 psi liq
50°C max
PAEK stator
Valcon E rotor



4 Port

Prod No Price



6 Port*

Prod No Price



8 Port

Prod No Price



10 Port

Prod No Price

N60 stainless stator

Manual	C2-1004	\$550	C2-1006	\$550	C2H-1008	\$605	C2H-1000	\$660
With pneumatic actuator	C2-1004A	800	C2-1006A	800	C2H-1008A	855	C2H-1000A	910
With standard electric actuator	C2-1004E	1120	C2-1006E	1120	C2H-1008E	1175	C2H-1000E	1230
With microelectric actuator	C2-1004EH	1290	C2-1006EH	1290	C2H-1008EH	1345	C2H-1000EH	1400
Replacement valve	C2-1004D	550	C2-1006D	550	C2H-1008D	605	C2H-1000D	660
Replacement rotor	C2-10R4	72	C2-10R6	72	C2-10R8H	72	C2-10R0H	72
Replacement stator	C-1C04	385	C-1C06	385	C-1C08H	440	C-1C00H	495

PAEK stator

Manual	C2-1344	660	C2-1346	660	C2H-1348	715	C2H-1340	770
With pneumatic actuator	C2-1344A	910	C2-1346A	910	C2H-1348A	965	C2H-1340A	1020
With standard electric actuator	C2-1344E	1230	C2-1346E	1230	C2H-1348E	1285	C2H-1340E	1340
With microelectric actuator	C2-1344EH	1400	C2-1346EH	1400	C2H-1348EH	1455	C2H-1340EH	1510
Replacement valve	C2-1344D	660	C2-1346D	660	C2H-1348D	715	C2H-1340D	770
Replacement rotor	C2-13R4	72	C2-13R6	72	C2-13R8H	72	C2-13R0H	72
Replacement stator	C-1C44	495	C-1C46	495	C-1C48H	550	C-1C40H	605

Titanium stator

Manual	C2-1034	840	C2-1036	840	C2H-1038	895	C2H-1030	950
With pneumatic actuator	C2-1034A	1090	C2-1036A	1090	C2H-1038A	1145	C2H-1030A	1200
With standard electric actuator	C2-1034E	1410	C2-1036E	1410	C2H-1038E	1465	C2H-1030E	1520
With microelectric actuator	C2-1034EH	1580	C2-1036EH	1580	C2H-1038EH	1635	C2H-1030EH	1690
Replacement valve	C2-1034D	840	C2-1036D	840	C2H-1038D	895	C2H-1030D	950
Replacement rotor	C2-10R4	72	C2-10R6	72	C2-10R8H	72	C2-10R0H	72
Replacement stator	C-1C34	675	C-1C36	675	C-1C38H	730	C-1C30H	785

OPTIONS

- Continuous flow version is available as Model C6. See page 160.
- Hastelloy C stators
- Loop fill port assembly for injection from front of the valve. See page 41.
- 0.15 mm (0.006") bore



Order loops from page 159.



Model C2
1/16" ZDV fittings

MORE INFORMATION

Actuators	
Air	page 195
Microelectric	188-189
Standard electric	193
Materials	
Metals	254-255
Polymers	256
Valve rotors	257
Nuts	
Metal	10
PEEK	63
Ferrules	
Metal	12
PEEK	63
Standoff assemblies	205-207

**Microbore nanoliter sample injector,
1/16" Valco fittings, 0.15 mm ports (.006")**

Model C4

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor

Includes stainless steel nuts and ferrules of the stator material. Valves with PAEK stators have PEEK nuts and ferrules.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.



- 5,000 psi**
- Microbore**
- Internal sample**
- 1/16"**
- 0.15 mm**

OPTIONS

- 100, 200, and 500 nl sample volumes are also available in 0.25 mm bore. See page 162.
- Loop fill port assembly for injection from front of the valve. See page 41.
- 0.25 mm (0.010") bore

Sample volume	10 nanoliters		20 nanoliters		50 nanoliters	
	Prod No	Price	Prod No	Price	Prod No	Price
N60 stainless stator						
Manual	C4-0004-.01	\$715	C4-0004-.02	\$715	C4-0004-.05	\$715
With pneumatic actuator	C4-0004-.01A	965	C4-0004-.02A	965	C4-0004-.05A	965
With standard electric actuator	C4-0004-.01E	1285	C4-0004-.02E	1285	C4-0004-.05E	1285
With microelectric actuator	C4-0004-.01EH	1455	C4-0004-.02EH	1455	C4-0004-.05EH	1455
Replacement valve	C4-0004-.01D	715	C4-0004-.02D	715	C4-0004-.05D	715
Replacement rotor	C4-00R-.01	82	C4-00R-.02	82	C4-00R-.05	82
Replacement stator	C4-0C0	550	C4-0C0	550	C4-0C0	550
PAEK stator						
Manual	C4-0344-.01	825	C4-0344-.02	825	C4-0344-.05	825
With pneumatic actuator	C4-0344-.01A	1075	C4-0344-.02A	1075	C4-0344-.05A	1075
With standard electric actuator	C4-0344-.01E	1395	C4-0344-.02E	1395	C4-0344-.05E	1395
With microelectric actuator	C4-0344-.01EH	1565	C4-0344-.02EH	1565	C4-0344-.05EH	1565
Replacement valve	C4-0344-.01D	825	C4-0344-.02D	825	C4-0344-.05D	825
Replacement rotor	C4-03R-.01	82	C4-03R-.02	82	C4-03R-.05	82
Replacement stator	C4-0C4	660	C4-0C4	660	C4-0C4	660



Sample loops for C1, C2, C2V, C3, and C6 valves

Each metal loop includes two stainless steel nuts and ferrules.
 Each PEEK loop includes two PEEK nuts and ferrules.

Volume	Stainless Steel		PEEK (for PAEK stators)		Titanium	
	Prod No	Price	Prod No	Price	Prod No	Price
2 µl	CSL2	\$22.50	CZSL2PK	\$31.25	-	-
5 µl	CSL5	22.50	CZSL5PK	31.25	-	-
10 µl	CSL10	22.50	CZSL10PK	31.25	CSL10TI	\$50.00
20 µl	CSL20	22.50	CZSL20PK	27.50	CSL20TI	50.00
50 µl	CSL50	22.50	CZSL50PK	25.00	CSL50TI	50.00
100 µl	CSL100	31.25	CZSL100PK	25.00	CSL100TI	50.00
250 µl	CSL250	31.25	CZSL250PK	31.25	CSL250TI	75.00
500 µl	CSL500	31.25	CZSL500PK	37.50	CSL500TI	150.00
1 ml	CSL1K	35.00	CZSL1KPK	50.00	CSL1KTI	237.00
2 ml	CSL2K	45.00	CZSL2KPK	68.75	-	-
5 ml	CSL5K	52.50	CZSL5KPK	106.25	-	-
10 ml	CSL10K	68.75	-	-	-	-



Model C4
1/16" ZDV fittings

ABOUT LOOPS

- Other materials are available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, and PTFE (see pages 254-256).
- Metal loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

Microbore HPLC

Microbore through-the-handle injector, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C1

- 5,000 psi
- Microbore
- Through-the-handle
- 1/16" 0.25 mm



Available only in manual version. Position feedback included.

Includes stainless steel nuts and ferrules. Valves with PAEK stators have PEEK nuts and ferrules.

Includes one 5 µl loop of the stator material.

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor



Model C1 and C1CF
1/16" ZDV fittings

6 port injector
 Replacement rotor
 Replacement stator

N60 stainless stator		PAEK stator	
Prod No	Price	Prod No	Price
C1-1006	\$705	C1-1346	\$815
C1-10R6	72	C1-13R6	72
C-1C06	385	C-1C46	495
Prod No Price		Prod No Price	
Replacement injector fitting	C-261		\$39



OPTIONS

- Titanium and Hastelloy stators available.
- 0.40 mm bore (.016") on page 163.

Microbore continuous flow through-the-handle injector, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C1CF

- 5,000 psi
- Microbore
- Continuous flow
- Through-the-handle
- 1/16" 0.25 mm



Available only in manual version. Position feedback included.

Includes stainless steel nuts and ferrules. Valves with PAEK stators have PEEK nuts and ferrules.

Includes one 5 µl loop of the stator material.

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor

6 port injector
 Replacement rotor
 Replacement stator

N60 stainless stator		PAEK stator	
Prod No	Price	Prod No	Price
C1CF-1006	\$760	C1CF-1346	\$870
C1-10R6	72	C1-13R6	72
C6-1C06	440	C6-1C46	550
Prod No Price		Prod No Price	
Replacement injector fitting	C-261		\$39



OPTIONS

- 0.40 mm bore (.016") on page 163.

Microbore continuous flow injector, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C6

- 5,000 psi
- Microbore
- Continuous flow
- 1/16" 0.25 mm

Includes stainless steel nuts and ferrules.
 * Includes a 5 µl loop of the stator material.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor

Manual
 With pneumatic actuator

N60 stainless stator		PAEK stator		
Prod No	Price	Prod No	Price	
C6-1006	\$605	C6-1346	\$715	
C6-1006A	855	C6-1346A	965	
With standard electric actuator	C6-1006E	1175	C6-1346E	1285
With microelectric actuator	C6-1006EH	1345	C6-1346EH	1455
Replacement valve	C6-1006D	605	C6-1346D	715
Replacement rotor	C2-10R6	72	C2-13R6	72
Replacement stator	C6-1C06	440	C6-1C46	550




Model C6
1/16" ZDV fittings

Order loops from page 159.

C1CF and C6 CONTINUOUS FLOWPATH

An engraving on the stator maintains pump flow between ports 5 and 4 during most of the switching cycle, virtually eliminating pressure spikes.

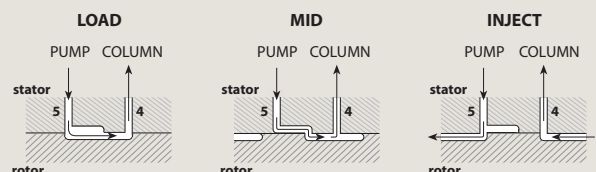

**Analytical valves,
1/16" Valco fittings, 0.40 mm ports (.016")**

Model C2

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor

Includes stainless steel nuts and ferrules of the stator material. Valves with PAEK stators have PEEK nuts and ferrules.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.
 Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.

*The 6 port valve includes a 20 µl loop of the stator material.

5,000 psi
Analytical
1/16" 0.40 mm

OPTIONS

- Continuous flow version is available as Model C6. See page 163.
- Hastelloy C stators
- Semi-prep version with 0.75 mm ports (.030") available
- Loop fill port assembly for injection from front of the valve. See page 41.



Order loops from page 159.

OPTIONAL FLOWPATH

Model C2 6 port valves can also be ordered with a dual 3-way rotor, as described in EPA Method 555.

To specify this flowpath, substitute "6X" for "6" in the valve or rotor product number.



AUTOSAMPLER REPLACEMENT VALVES

The Cheminert Model C2 6 port valve is an excellent replacement for the valve originally supplied in many autosamplers, including autosamplers manufactured by Beckman, Gilson, Spark-Holland, CTC, Thermo Fisher, and Varian.

Call technical support to determine which replacement is best for your application.



4 Port



6 Port*



8 Port



10 Port

N60 stainless stator

	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C2-2004	\$385	C2-2006	\$385	C2H-2008	\$440	C2H-2000	\$495
With pneumatic actuator	C2-2004A	635	C2-2006A	635	C2H-2008A	690	C2H-2000A	745
With standard electric actuator	C2-2004E	955	C2-2006E	955	C2H-2008E	1010	C2H-2000E	1065
With microelectric actuator	C2-2004EH	1125	C2-2006EH	1125	C2H-2008EH	1180	C2H-2000EH	1235
Replacement valve	C2-2004D	385	C2-2006D	385	C2H-2008D	440	C2H-2000D	495
Replacement rotor	C2-20R4	72	C2-20R6	72	C2-20R8H	72	C2-20R0H	72
Replacement stator	C-2C04	220	C-2C06	220	C-2C08H	275	C-2C00H	330
PAEK stator								
Manual	C2-2344	495	C2-2346	495	C2H-2348	550	C2H-2340	605
With pneumatic actuator	C2-2344A	745	C2-2346A	745	C2H-2348A	800	C2H-2340A	855
With standard electric actuator	C2-2344E	1065	C2-2346E	1065	C2H-2348E	1120	C2H-2340E	1175
With microelectric actuator	C2-2344EH	1235	C2-2346EH	1235	C2H-2348EH	1290	C2H-2340EH	1345
Replacement valve	C2-2344D	495	C2-2346D	495	C2H-2348D	550	C2H-2340D	605
Replacement rotor	C2-23R4	72	C2-23R6	72	C2-23R8H	72	C2-23R0H	72
Replacement stator	C-2C44	330	C-2C46	330	C-2C48H	385	C-2C40H	440

Titanium stator

Manual	C2-2034	675	C2-2036	675	C2H-2038	730	C2H-2030	785
With pneumatic actuator	C2-2034A	925	C2-2036A	925	C2H-2038A	980	C2H-2030A	1035
With standard electric actuator	C2-2034E	1245	C2-2036E	1245	C2H-2038E	1300	C2H-2030E	1355
With microelectric actuator	C2-2034EH	1415	C2-2036EH	1415	C2H-2038EH	1470	C2H-2030EH	1525
Replacement valve	C2-2034D	675	C2-2036D	675	C2H-2038D	730	C2H-2030D	785
Replacement rotor	C2-20R4	72	C2-20R6	72	C2-20R8H	72	C2-20R0H	72
Replacement stator	C-2C34	510	C-2C36	510	C-2C38H	565	C-2C30H	620



Model C2
1/16" ZDV fittings

Analytical HPLC

Analytical internal sample injector, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C4

5,000 psi

Analytical

Internal sample

1/16" 0.25 mm



Includes stainless steel nuts and ferrules of the stator material. Valves with PAEK stators have PEEK nuts and ferrules.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international.
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply.

SPECS
5000 psi liq
75°C max
Metal stator
Valcon H rotor
5000 psi liq
50°C max
PAEK stator
Valcon E rotor

Sample volume	0.1 µl		0.2 µl		0.5 µl	
	Prod No	Price	Prod No	Price	Prod No	Price
N60 stainless stator						
Manual	C4-1004-.1	\$550	C4-1004-.2	\$550	C4-1004-.5	\$550
With pneumatic actuator	C4-1004-.1A	800	C4-1004-.2A	800	C4-1004-.5A	800
With standard electric actuator	C4-1004-.1E	1120	C4-1004-.2E	1120	C4-1004-.5E	1120
With microelectric actuator	C4-1004-.1EH	1290	C4-1004-.2EH	1290	C4-1004-.5EH	1290
Replacement valve	C4-1004-.1D	550	C4-1004-.2D	550	C4-1004-.5D	550
Replacement rotor	C4-10R-.1	72	C4-10R-.2	72	C4-10R-.5	72
Replacement stator	C4-1C0	385	C4-1C0	385	C4-1C0	385
PAEK stator						
Manual	C4-1344-.1	660	C4-1344-.2	660	C4-1344-.5	660
With pneumatic actuator	C4-1344-.1A	910	C4-1344-.2A	910	C4-1344-.5A	910
With standard electric actuator	C4-1344-.1E	1230	C4-1344-.2E	1230	C4-1344-.5E	1230
With microelectric actuator	C4-1344-.1EH	1400	C4-1344-.2EH	1400	C4-1344-.5EH	1400
Replacement valve	C4-1344-.1D	660	C4-1344-.2D	660	C4-1344-.5D	660
Replacement rotor	C4-13R-.1	72	C4-13R-.2	72	C4-13R-.5	72
Replacement stator	C4-1C4	495	C4-1C4	495	C4-1C4	495
Titanium stator						
Manual	C4-1034-.1	840	C4-1034-.2	840	C4-1034-.5	840
With pneumatic actuator	C4-1034-.1A	1090	C4-1034-.2A	1090	C4-1034-.5A	1090
With standard electric actuator	C4-1034-.1E	1410	C4-1034-.2E	1410	C4-1034-.5E	1410
With microelectric actuator	C4-1034-.1EH	1580	C4-1034-.2EH	1580	C4-1034-.5EH	1580
Replacement valve	C4-1034-.1D	840	C4-1034-.2D	840	C4-1034-.5D	840
Replacement rotor	C4-10R-.1	72	C4-10R-.2	72	C4-10R-.5	72
Replacement stator	C4-1C3	675	C4-1C3	675	C4-1C3	675

OPTIONS

- .05 µl sample volumes are also available.
- Loop fill port assembly for injection from front of the valve.
See page 41.



Model C4
1/16" ZDV fittings

MORE INFORMATION

- Actuators
Air page 195
Microelectric .. 188-189
Standard electric ... 193
Materials
Metals..... 254-255
Polymers 256
Valve rotors..... 257
Standoff
assemblies 205-207

Analytical through-the-handle injector, 1/16" Valco fittings, 0.40 mm ports (.016")

Model C1

SPECS

5000 psi liq
75°C max
Metal stator
Valcon H rotor

Available only in manual version. Position feedback included.

Includes stainless steel nuts and ferrules. Valves with PAEK stators have PEEK nuts and ferrules.

Includes one 20 µl loop of the stator material.



- 5,000 psi
- Analytical
- Through-the-handle
- 1/16"
- 0.40 mm

5000 psi liq
50°C max
PAEK stator
Valcon E rotor

6 port injector
Replacement rotor
Replacement stator


N60 stainless stator

Prod No	Price
C1-2006	\$540
C1-20R6	72
C-2C06	220

PAEK stator

Prod No	Price
C1-2346	\$650
C1-23R6	72
C-2C46	330

Prod No	Price
C-261	\$39

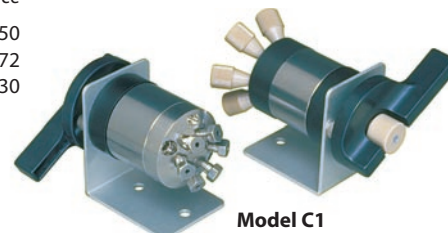

Model C1 and C1CF
1/16" ZDV fittings

OPTIONS

- Titanium stator available.
- 0.25 mm bore (.010") on page 160.

Replacement injector fitting

Analytical continuous flow through-the-handle injector, 1/16" Valco fittings, 0.40 mm ports (.016")

Model C1CF

SPECS

5000 psi liq
75°C max
Metal stator
Valcon H rotor

Available only in manual version. Position feedback included.

Includes stainless steel nuts and ferrules. Valves with PAEK stators have PEEK nuts and ferrules.

Includes one 20 µl loop of the stator material.



- 5,000 psi
- Analytical
- Continuous flow
- Through-the-handle
- 1/16"
- 0.40 mm

5000 psi liq
50°C max
PAEK stator
Valcon E rotor

6 port injector
Replacement rotor
Replacement stator
Prod No

N60 stainless stator

Prod No	Price
C1CF-2006	\$595
C1-20R6	72
C6-2C06	270

PAEK stator

Prod No	Price
C1CF-2346	\$705
C1-23R6	72
C6-2C46	380

Prod No	Price
C-261	\$39



OPTIONS

- 0.25 mm bore (.010") on page 160.

Replacement injector fitting

Analytical continuous flow injector, 1/16" Valco fittings, 0.40 mm ports (.016")

Model C6

SPECS

5000 psi liq
75°C max
Metal stator
Valcon H rotor

Includes stainless steel nuts and ferrules.

Includes a 20 µl loop of the stator material.

Standard electric actuator: 110 VAC for USA, 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

5000 psi liq
50°C max
PAEK stator
Valcon E rotor

Manual
With pneumatic actuator
With standard electric actuator
With microelectric actuator
Replacement valve
Replacement rotor
Replacement stator

N60 stainless stator

Prod No	Price
C6-2006	\$440
C6-2006A	690
C6-2006E	1010
C6-2006EH	1180
C6-2006D	440
C2-20R6	72
C6-2C06	270

PAEK stator

Prod No	Price
C6-2346	\$550
C6-2346A	800
C6-2346E	1120
C6-2346EH	1290
C6-2346D	550
C2-23R6	72
C6-2C46	380

Order loops from page 159.


- 5,000 psi
- Analytical
- Continuous flow
- 1/16"
- 0.40 mm



Model C6
1/16" ZDV fittings

C1CF and C6 CONTINUOUS FLOWPATH

An engraving on the stator maintains pump flow between ports 5 and 4 during most of the switching cycle, virtually eliminating pressure spikes.

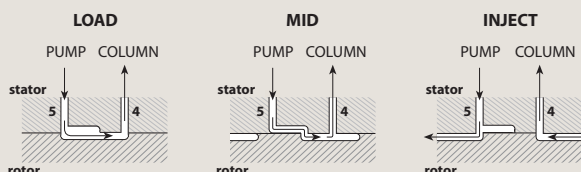

Low Pressure

Valves with 1/16" Valco ZDV fittings, 0.75 mm ports (.030")

Model C22Z

Low pressure
10-32 ZDV
1/16" 0.75 mm

Includes Valco ZDV PEEK nuts and ferrules.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.
 Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.

Sample loops are not included with valves. Order separately.

SPECS
100 psi gas/ 250 psi liq
75°C max
 PPS stator
 Valcon E2 rotor



4 Port



6 Port



8 Port



10 Port

	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C22Z-3184	\$260	C22Z-3186	\$260	C22Z-3188	\$290	C22Z-3180	\$315
With pneumatic actuator	C22Z-3184A	510	C22Z-3186A	510	C22Z-3188A	540	C22Z-3180A	565
With standard electric actuator	C22Z-3184E	830	C22Z-3186E	830	C22Z-3188E	860	C22Z-3180E	885
With microelectric actuator	C22Z-3184EH	1000	C22Z-3186EH	1000	C22Z-3188EH	1030	C22Z-3180EH	1055
Replacement valve	C22Z-3184D	260	C22Z-3186D	260	C22Z-3188D	290	C22Z-3180D	315
Replacement rotor	C12-314	50	C12-316	50	C12-318	50	C12-310	50
Replacement stator	C22Z-384	150	C22Z-386	150	C22Z-388	180	C22Z-380	205

OPTIONS

- Purge option
- Other polymeric rotors and stators are available.

Consult the factory for prices and information.

PURGE OPTION

The purge option permits a flow of liquid or gas to flush the valve interior of potentially toxic or corrosive components. We recommend this option for applications using materials (such as salt solutions) that could damage the metal parts of the valve.

Consult our technical staff for details.



Model C22Z
1/16" ZDV fittings

Sample loops

for Model C22Z



Loops include PEEK nuts and ferrules. Loops smaller than 500 µl are made from 1/16" OD tubing; loops 500 µl or bigger are made from 1/8" OD tubing with polymeric unions and 1/16" ends.





Volume	FEP		PTFE		PEEK	
	Prod No	Price	Prod No	Price	Prod No	Price
5 µl	CZSL5FEP	\$25.00	CZSL5TF	\$25.00	CZSL5PK	\$31.25
10 µl	CZSL10FEP	25.00	CZSL10TF	25.00	CZSL10PK	31.25
20 µl	CZSL20FEP	22.50	CZSL20TF	22.50	CZSL20PK	27.50
50 µl	CZSL50FEP	18.75	CZSL50TF	18.75	CZSL50PK	25.00
100 µl	CZSL100FEP	18.75	CZSL100TF	18.75	CZSL100PK	25.00
250 µl	CZSL250FEP	22.50	CZSL250TF	22.50	CZSL250PK	31.25
500 µl	CZSL500FEP	25.00	CZSL500TF	25.00	CZSL500PK	37.50
1 ml	CZSL1KFEP	30.00	CZSL1KTF	30.00	CZSL1KPK	50.00
2 ml	CZSL2KFEP	37.50	CZSL2KTF	37.50	CZSL2KPK	68.75

MORE INFORMATION

- Actuators
 Air page 195
 Microelectric .. 188-189
 Standard electric ... 193
 Materials
 Metals..... 254-255
 Polymers 256
 Valve rotors..... 257
 Standoff
 assemblies 205-207

Valves with 1/4-28 fitting details for 1/16" tubing, 0.75 mm ports (.030")

Model C22

SPECS 100 psi gas/ 250 psi liq 75°C max PPS stator Valcon E2 rotor	Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/16" tubing.	Standard electric actuator: 110 VAC for USA 110/230 VAC to 24 VDC power supply for international.		Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.		Sample loops are not included with valves. Order separately.		Low pressure 1/4-28 Internal 1/16" 0.75 mm	
									
		4 Port		6 Port		8 Port		10 Port	
		<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
Manual		C22-3184	\$260	C22-3186	\$260	C22-3188	\$350	C22-3180	\$375
With pneumatic actuator		C22-3184A	510	C22-3186A	510	C22-3188A	600	C22-3180A	625
With standard electric actuator		C22-3184E	830	C22-3186E	830	C22-3188E	920	C22-3180E	945
With microelectric actuator		C22-3184EH	1000	C22-3186EH	1000	C22-3188EH	1090	C22-3180EH	1115
Replacement valve		C22-3184D	260	C22-3186D	260	C22-3188D	350	C22-3180D	375
Replacement rotor		C22-314	50	C22-316	50	C22-318	50	C22-310	50
Replacement stator		C22-384	150	C22-386	150	C22-388	240	C22-380	265

Valves with 1/4-28 fitting details for 1/8" tubing, 1.50 mm ports (.060")

Model C22

SPECS 100 psi gas/ 250 psi liq 75°C max PPS stator Valcon E2 rotor	Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/8" tubing.	Standard electric actuator: 110 VAC for USA 110/230 VAC to 24 VDC power supply for international.		Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.		Sample loops are not included with valves. Order separately.		Low pressure 1/4-28 Internal 1/8" 1.50 mm	
		4 Port		6 Port		8 Port		10 Port	
		<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
Manual		C22-6184	\$260	C22-6186	\$260	C22-6188	\$350	C22-6180	\$375
With pneumatic actuator		C22-6184A	510	C22-6186A	510	C22-6188A	600	C22-6180A	625
With standard electric actuator		C22-6184E	830	C22-6186E	830	C22-6188E	920	C22-6180E	945
With microelectric actuator		C22-6184EH	1000	C22-6186EH	1000	C22-6188EH	1090	C22-6180EH	1115
Replacement valve		C22-6184D	260	C22-6186D	260	C22-6188D	350	C22-6180D	375
Replacement rotor		C22-614	50	C22-616	50	C22-618	50	C22-610	50
Replacement stator		C22-684	150	C22-686	150	C22-688	240	C22-680	265

Sample loops

for Model C22

Loops include flangeless fittings with white color nuts. Loops smaller than 500 µl are made from 1/16" OD tubing; loops 500 µl or bigger are made from 1/8" OD tubing.

Volume	FEP		PTFE		PEEK	
	Prod No	Price	Prod No	Price	Prod No	Price
20 µl	CFSL20FEP	\$17.50	CFSL20TF	\$17.50	CFSL20PK	\$25.00
50 µl	CFSL50FEP	17.50	CFSL50TF	17.50	CFSL50PK	25.00
100 µl	CFSL100FEP	17.50	CFSL100TF	17.50	CFSL100PK	25.00
250 µl	CFSL250FEP	17.50	CFSL250TF	17.50	CFSL250PK	25.00
500 µl	CFSL500FEP	20.00	CFSL500TF	20.00	CFSL500PK	30.00
1 ml	CFSL1KFEP	25.00	CFSL1KTF	25.00	CFSL1KPK	40.00
2 ml	CFSL2KFEP	30.00	CFSL2KTF	30.00	CFSL2KPK	62.50



Model C22
1/4-28 fittings

Low Pressure

Internal sample injectors, 1/16" Valco ZDV fittings, 0.40 mm ports (.016")

Model C24Z

- Low pressure
- Internal sample
- 10-32 ZDV
- 1/16" 0.40 mm



Includes Valco ZDV PEEK nuts and ferrules.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply.

SPECS


100 psi gas/ 250 psi liq
75°C max
PPS stator
Valcon E2 rotor

Sample volume

	0.2 µl		0.5 µl		1 µl	
	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C24Z-2184-.2	\$260	C24Z-2184-.5	\$260	C24Z-2184-1	\$260
With pneumatic actuator	C24Z-2184-.2A	510	C24Z-2184-.5A	510	C24Z-2184-1A	510
With standard electric actuator	C24Z-2184-.2E	830	C24Z-2184-.5E	830	C24Z-2184-1E	830
With microelectric actuator	C24Z-2184-.2EH	1000	C24Z-2184-.5EH	1000	C24Z-2184-1EH	1000
Replacement valve	C24Z-2184-.2D	260	C24Z-2184-.5D	260	C24Z-2184-1D	260
Replacement rotor	C24-10R-.2	50	C24-10R-.5	50	C24-10R-1	50
Replacement stator	C24Z-1C8	150	C24Z-1C8	150	C24Z-1C8	150

OPTIONS

- 2.0 µl sample volumes are also available.
- Purge option. *See more information below.*
- Other polymeric rotors and stators are available. Consult the factory for prices and information.



Model C24Z
1/16" ZDV fittings

PURGE OPTION

The purge option permits a flow of liquid or gas to flush the valve interior of potentially toxic or corrosive components. We recommend this option for applications using materials (such as salt solutions) that could damage the metal parts of the valve.

Consult our technical staff for details.

MORE INFORMATION

Actuators	
Air page 195
Microelectric	.. 188-189
Standard electric	... 193
Materials	
Metals 254-255
Polymers 256
Valve rotors 257
Standoff assemblies 205-207

Internal sample injectors, 1/4-28 for 1/16" tubing, 0.50 mm ports (.020")

Model C24



- Low pressure
- Internal sample
- 1/4-28 Internal
- 1/16" 0.50 mm

SPECS
 100 psi gas/ 250 psi liq
 75°C max
 PPS stator
 Valcon E2 rotor

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/16" tubing.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.
 Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.

OPTIONS

- 0.2 µl sample volumes are also available.
- Purge option
- Other polymeric rotors and stators are available. Consult the factory for prices and information.

Sample volume	0.5 µl		1 µl		2 µl	
	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C24-2184-.5	\$260	C24-2184-1	\$260	C24-2184-2	\$260
With pneumatic actuator	C24-2184-.5A	510	C24-2184-1A	510	C24-2184-2A	510
With standard electric actuator	C24-2184-.5E	830	C24-2184-1E	830	C24-2184-2E	830
With microelectric actuator	C24-2184-.5EH	1000	C24-2184-1EH	1000	C24-2184-2EH	1000
Replacement valve	C24-2184-.5D	260	C24-2184-1D	260	C24-2184-2D	260
Replacement rotor	C24-10R-.5	50	C24-10R-1	50	C24-10R-2	50
Replacement stator	C24-1C8	150	C24-1C8	150	C24-1C8	150



Model C24
 1/4-28 fittings

Injector and Switching Valve Applications


These illustrations show basic sample injection techniques using Valco two position valves. With rare exceptions, there is no difference between switching valves and external volume sampling valves, so the same valve can be used for either function.

The unique advantage of 8 and 10 port valves is that they reduce extra column volume by combining sampling and switching functions in a single valve. This minimizes expense, maintenance, service, and risk of leaks as compared to multiple 6 port valve systems.

4 port internal sample injector

MICROVOLUME SAMPLE INJECTION


The internal sample (fixed volume) flowpath is used when very small sample volumes are required. The sample size is determined by a passage engraved on the valve rotor, allowing precise, repeatable injections. In Position A, the sample flows through the sample passage while the mobile phase flows through to the column. The third passage is inactive. In Position B, the sample passage is in line with the column and the mobile phase injects the contents of the sample passage into the column. The passage which was inactive in Position A allows the sample to continue flowing without interruption.

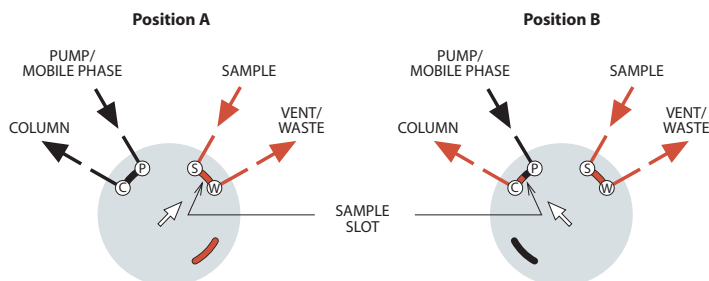


4 port switching valve

DETECTOR SELECTION FROM TWO COLUMNS OR ONE COLUMN AND AUXILIARY CARRIER

This unique configuration allows analyses of different parts of one analysis with two different detectors, without splitting or multiple injections.

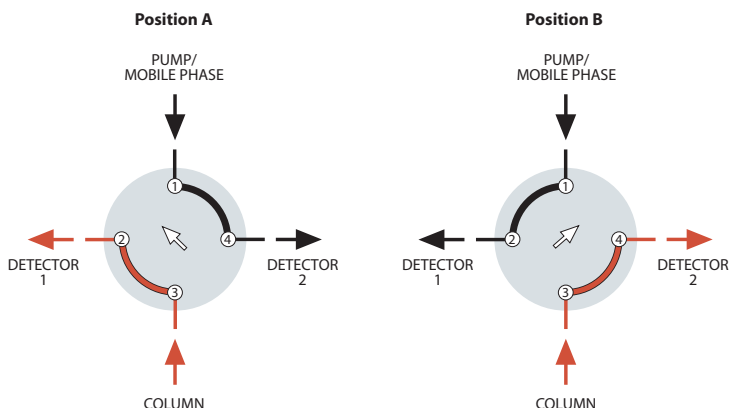

6 port external sample injector

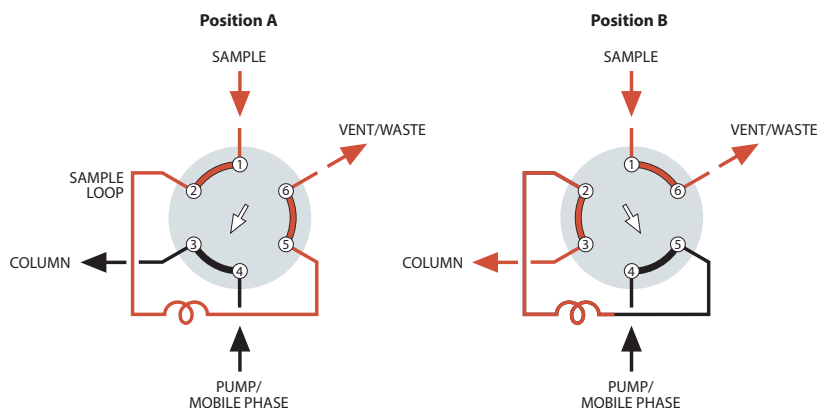


SAMPLE INJECTION

With the valve in Position A, sample flows through the external loop while the mobile phase flows directly through to the column. When the valve is switched to Position B, the sample contained in the sample loop and valve flow passage is displaced by the mobile phase and is carried into the column. *Note:* Especially for partial-filled loops, the flow direction of the mobile phase through the loop should be opposite (backflush) to the flow direction during the loading of the loop.

More applicationspages 118-119

8 port sampling/switching

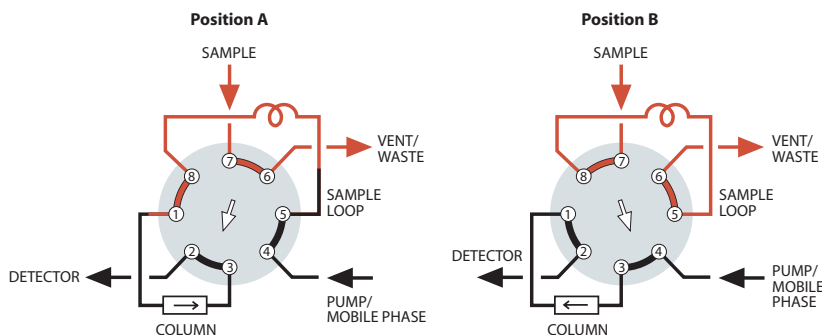


LOOP SAMPLING WITH BACKFLUSH TO DETECTOR

One valve performs the functions of sampling and backflush valves, simplifying operation and reducing cost. When components of interest are detected, the strongly retained components are backflushed and removed from the column without temperature programming.

More applications page 119

10 port sampling/switching

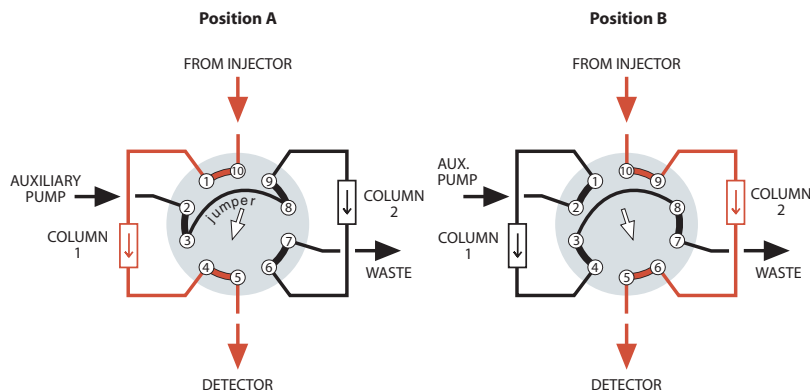

ALTERNATE COLUMN REGENERATION

When columns must be regenerated following each analysis, this technique permits automation of the process. While one column performs the analysis, the second column undergoes regeneration through use of an auxiliary pump. Once the first analysis is complete, the valve is switched and the regenerated column is ready for analytical use.

More applicationspages 120-121

NEW Selectors – Nanovolume UHPLC

NEW 15,000 psi UHPLC Nanovolume selectors, 1/32" Valco fittings, 150 micron ports (.006")

Model C75NX

- 15,000 psi
- Stream selector
- 1/32"
- 150 µm

Includes 1/32" Valco stainless steel fittings.



Manual version not available.


Standard electric actuator:

110 VAC for USA

110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:

24 VDC, with 110/230 VAC to 24 VDC power supply.



SPECS

15,000 psi liq
50°C max

Stainless stator with inert coating
Valcon E3 rotor

OPTIONS

- 100 micron (.004") bore
- 250 micron (.010") bore
- 10,000 and 20,000 psi versions available
- 4 positions

	6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price
Coated stainless stator						
With pneumatic actuator	C75NX-6696A	\$1620	C75NX-6698A	\$1670	C75NX-6690A	\$1720
With standard electric actuator	C75NX-6696E	2025	C75NX-6698E	2075	C75NX-6690E	2125
With microelectric actuator	C75NX-6696EMH	2185	C75NX-6698EMT	2295	C75NX-6690EMT	2345
Replacement valve	C75NX-6696D	1215	C75NX-6698D	1265	C75NX-6690D	1315
Replacement rotor	C75N-66R6	95	C75N-66R8	95	C75N-66R0	95
Replacement stator	C75N-6C96	915	C75N-6C98	965	C75N-6C90	1015



Model C75NX
1/32" Valco stainless fittings

NEW 10,000 psi UHPLC microbore selectors, 1/16" Valco fittings, 250 micron ports (.010")

Model C75H

SPECS
10,000 psi liq
50°C max
 Stainless stator
 with inert coating
 Valcon E3 rotor

Includes 1/16" Valco
 stainless steel fittings.



Manual version not available.
 Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for
 international.
 Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC
 power supply.

10,000 psi

Stream selector

1/16" 250 µm

OPTIONS

- 150 micron (.006") bore
- 15,000 psi version available
- 4 positions

Coated stainless stator

	6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price
With pneumatic actuator	C75H-1696A	\$1270	C75H-1698A	\$1320	C75H-1690A	\$1370
With standard electric actuator	C75H-1696E	1675	C75H-1698E	1725	C75H-1690E	1775
With microelectric actuator	C75H-1696EMH	1835	C75H-1698EMT	1945	C75H-1690EMT	1995
Replacement valve	C75H-1696D	865	C75H-1698D	915	C75H-1690D	965
Replacement rotor	C75-16R6	95	C75-16R8	95	C75-16R0	95
Replacement stator	C75-1C96	715	C75-1C98	765	C75-1C90	815



Model C75H
 1/16" Valco stainless
 fittings

Selectors – High Pressure


HPLC stream selector, 1/16" Valco ZDV fittings, 0.40 mm ports (.016")

Model C5

- 5,000 psi**
- Stream selector**
- 10-32 ZDV**
- 1/16"**
- 0.40 mm**

Includes stainless steel nuts and ferrules of the stator material. Valves with PAEK stators have PEEK nuts and ferrules.

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply for international.
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC power supply.



SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor

	4 Position		6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
N60 stainless stator								
Manual	C5-2004	\$470	C5-2006	\$470	C5H-2008	\$525	C5H-2000	\$580
With pneumatic actuator	C5-2004A	875	C5-2006A	875	C5H-2008A	930	C5H-2000A	985
With standard electric actuator	C5-2004E	1280	C5-2006E	1280	C5H-2008E	1335	C5H-2000E	1390
With microelectric actuator	C5-2004EMH	1440	C5-2006EMH	1440	C5H-2008EMT	1555	C5H-2000EMT	1610
Replacement valve	C5-2004D	470	C5-2006D	470	C5H-2008D	525	C5H-2000D	580
Replacement rotor	C5-20R4	72	C5-20R6	72	C5-20R8H	72	C5-20R0H	72
Replacement stator	C5-2C04	265	C5-2C06	265	C5-2C08H	320	C5-2C00H	375
PAEK stator								
Manual	C5-2344	580	C5-2346	580	C5H-2348	635	C5H-2340	690
With pneumatic actuator	C5-2344A	985	C5-2346A	985	C5H-2348A	1040	C5H-2340A	1095
With standard electric actuator	C5-2344E	1390	C5-2346E	1390	C5H-2348E	1445	C5H-2340E	1500
With microelectric actuator	C5-2344EMH	1550	C5-2346EMH	1550	C5H-2348EMT	1665	C5H-2340EMT	1720
Replacement valve	C5-2344D	580	C5-2346D	580	C5H-2348D	635	C5H-2340D	690
Replacement rotor	C5-23R4	72	C5-23R6	72	C5-23R8H	72	C5-23R0H	72
Replacement stator	C5-2C44	375	C5-2C46	375	C5-2C48H	430	C5-2C40H	485
Titanium stator								
Manual	C5-2034	760	C5-2036	760	C5H-2038	815	C5H-2030	870
With pneumatic actuator	C5-2034A	1165	C5-2036A	1165	C5H-2038A	1220	C5H-2030A	1275
With standard electric actuator	C5-2034E	1570	C5-2036E	1570	C5H-2038E	1625	C5H-2030E	1680
With microelectric actuator	C5-2034EMH	1730	C5-2036EMH	1730	C5H-2038EMT	1845	C5H-2030EMT	1900
Replacement valve	C5-2034D	760	C5-2036D	760	C5H-2038D	815	C5H-2030D	870
Replacement rotor	C5-20R4	72	C5-20R6	72	C5-20R8H	72	C5-20R0H	72
Replacement stator	C5-2C34	555	C5-2C36	555	C5-2C38H	610	C5-2C30H	645

OPTIONS

- 2", 3", 4", and 6" standoffs
- Hastelloy C stator
- Optional 0.15 mm (.006") and 0.25 mm (.010") bores available
- Optional 0.75 mm (.030") bore for Prep HPLC available


MORE INFORMATION

Manifolds page 33

OPTIONAL FLOWPATH

Model C5F, the flow-through version, is similar to the C5 but its non-selected streams continue flowing through individual outlets. 3, 4, and 5 positions are available.

Consult the factory for C5F prices and information.



Model C5F
schematic diagram



Model C5
6 positions
1/16" ZDV fittings

HPLC column selector system with 1/16" Valco ZDV fittings, 0.40 mm ports (.016")

Model C5

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PEEK stator
 Valcon E rotor

The system comprises two stream selection valves mounted on a single microelectric actuator, which can be controlled manually, via remote logic level signal, or by RS-232 interface (RS-485 optional). See plumbing diagram below.

Includes stainless steel nuts and ferrules of the stator material.

Valves with PEEK stators have PEEK nuts and ferrules.

Includes microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

5,000 psi

Column selector system

10-32 ZDV

1/16" 0.40 mm

OPTIONS

- 2", 3", 4", and 6" standoffs
- Hastelloy C stator
- Optional 0.25 mm (.010") bore available
- Optional 0.75 mm (.030") bore for Prep HPLC available

N60 stainless stator

	6 Column		8 Column		10 Column	
	Prod No	Price	Prod No	Price	Prod No	Price
System	C5-2006EMTD	\$2385	C5H-2008EMTD	\$2555	C5H-2000EMTD	\$2665
Replacement valve	C5-2006D	470	C5H-2008D	525	C5H-2000D	580
Replacement rotor	C5-20R6	72	C5-20R8H	72	C5-20R0H	72
Replacement stator*	C5-2C06	265	C5-2C08H	320	C5-2C00H	375



PEEK stator

System	C5-2346EMTD	2605	C5H-2348EMTD	2775	C5H-2340EMTD	2885
Replacement valve	C5-2346D	580	C5H-2348D	635	C5H-2340D	690
Replacement rotor	C5-23R6	72	C5-23R8H	72	C5-23R0H	72
Replacement stator*	C5-2C46	375	C5-2C48H	430	C5-2C40H	485

* See note on ordering stators, below.

RS-232 interface cable

Prod No	Price
I-22697	\$29

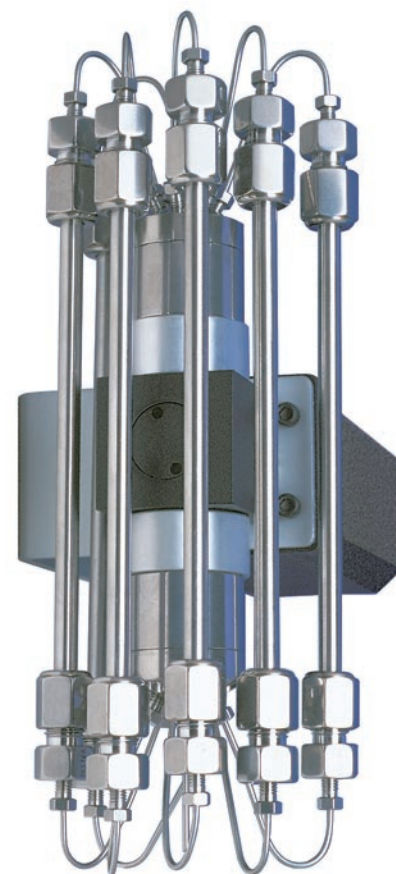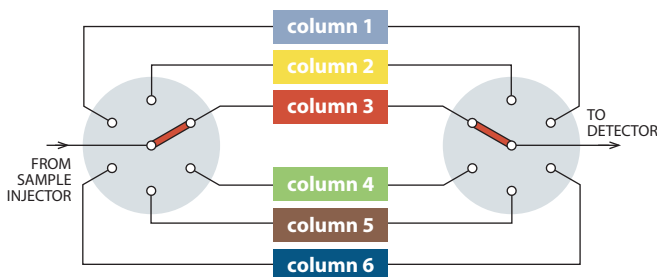

Model C5 system

Columns not included

MORE INFORMATION

- Actuators
- Air page 194
 - Microelectric . . . 190-191
 - Standard electric . . . 193
- Loop fill port assembly 41
- Materials
- Metals..... 254-255
 - Polymers256
 - Valve rotors.....257
- Standoff assemblies 205-207

ORDERING STATORS

Valves for dual drive assemblies have mirror image stators. Consult Technical Support for correct product number before ordering.

Both valves use the same rotor.

Selectors – Low Pressure


Stream selector, 1/16" Valco ZDV fittings, 0.75 mm ports (.030")

Model C25Z

- Low pressure
- Stream selector
- 10-32 ZDV
- 1/16" 0.75 mm

Includes Valco ZDV PEEK nuts and ferrules.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.
 Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.




SPECS

100 psi gas/ 250 psi liq
 75°C max
 PPS stator
 Valcon E2 rotor

OPTIONS

- 4 and 12 positions available
- 2", 3", 4", and 6" standoffs
- Other polymeric materials are available. Consult the factory.

	6 Position		8 Position		10 Position		14 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C25Z-3186	\$300	C25Z-3188	\$340	C25Z-3180	\$365	C25Z-31814	\$475
With pneumatic act.	C25Z-3186A	705	C25Z-3188A	745	C25Z-3180A	770	C25Z-31814A	880
With std electric act.	C25Z-3186E	1110	C25Z-3188E	1150	C25Z-3180E	1175	C25Z-31814E	1285
With microelectric act.	C25Z-3186EMH	1270	C25Z-3188EMH	1310	C25Z-3180EMH	1335	C25Z-31814EMH	1445
Replacement valve	C25Z-3186D	300	C25Z-3188D	340	C25Z-3180D	365	C25Z-31814D	475
Replacement rotor	C15-310	50	C15-310	50	C15-310	50	C25Z-325	50
Replacement stator	C25Z-386	180	C25Z-388	220	C25Z-380	240	C25Z-38-14	350

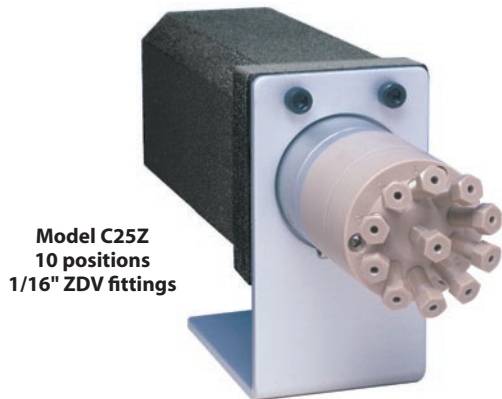


Model C25Z
 10 positions
 1/16" ZDV fittings

OPTIONAL FLOWPATH

Model C25ZF, the flow-through version, is similar to the C25Z but its non-selected streams continue flowing through individual outlets, instead of being dead-ended. 3, 4, 5, 6, and 7 positions are available.

Consult the factory for C25ZF prices and information.



Stream selector, 1/4-28 fittings for 1/16" tubing, 0.75 mm ports (.030")

Model C25

SPECS

100 psi gas / 250 psi liq
75°C max
PPS stator
Valcon E2 rotor


Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/16" tubing.

Standard electric actuator:

110 VAC for USA
110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:

24 VDC, with 110/230 VAC to 24 VDC power supply.



Low pressure

Stream selector

1/4-28 Internal

1/16" 0.75 mm

OPTIONS

- 2", 3", 4", and 6" standoffs
- CTFE stator

	4 Position		6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C25-3184	\$300	C25-3186	\$300	C25-3188	\$405	C25-3180	\$425
With pneumatic act.	C25-3184A	705	C25-3186A	705	C25-3188A	810	C25-3180A	830
With std electric act.	C25-3184E	1110	C25-3186E	1110	C25-3188E	1215	C25-3180E	1235
With microelec act.	C25-3184EMH	1270	C25-3186EMH	1270	C25-3188EMH	1375	C25-3180EMH	1395
Replacement valve	C25-3184D	300	C25-3186D	300	C25-3188D	405	C25-3180D	425
Replacement rotor	C25-314	50	C25-316	50	C25-318	50	C25-310	50
Replacement stator	C25-384	180	C25-386	180	C25-388	280	C25-380	305

Stream selector, 1/4-28 fittings for 1/8" tubing, 1.50 mm ports (.060")

Model C25

SPECS

100 psi gas / 250 psi liq
75°C max
PPS stator
Valcon E2 rotor


Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/8" tubing.

Standard electric actuator:

110 VAC for USA
110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:

24 VDC, with 110/230 VAC to 24 VDC power supply.



Low pressure

Stream selector

1/4-28 Internal

1/8" 1.50 mm

OPTIONS

- 2", 3", 4", and 6" standoffs
- CTFE stator

	4 Position		6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual	C25-6184	\$300	C25-6186	\$300	C25-6188	\$405	C25-6180	\$425
With pneumatic act.	C25-6184A	705	C25-6186A	705	C25-6188A	810	C25-6180A	830
With std electric act.	C25-6184E	1110	C25-6186E	1110	C25-6188E	1215	C25-6180E	1235
With microelec act.	C25-6184EMH	1270	C25-6186EMH	1270	C25-6188EMH	1375	C25-6180EMH	1395
Replacement valve	C25-6184D	300	C25-6186D	300	C25-6188D	405	C25-6180D	425
Replacement rotor	C25-614	50	C25-616	50	C25-618	50	C25-610	50
Replacement stator	C25-684	180	C25-686	180	C25-688	280	C25-680	305

MORE INFORMATION

Actuators

Air page 194
Microelectric .. 190-191
Standard electric ... 193

Materials

Metals..... 254-255
Polymers256
Valve rotors.....257

Standoff

assemblies 205-207

OPTIONAL FLOWPATH

Model C25F is the flow-through version of C25. (See discussion on facing page.) 3, 4, 5, 6, and 7 positions are available.

Consult the factory for C25F prices and information.



Model C25
10 position
1/4-28 fittings

Selectors – Low Pressure


Stream selector, 1/16" Valco ZDV fittings, 0.75 mm ports (.030")

Model C35Z

- Low pressure
- Stream selector
- 10-32 ZDV
- 1/16" 0.75 mm

Includes Valco ZDV PEEK nuts and ferrules.

Available only with microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

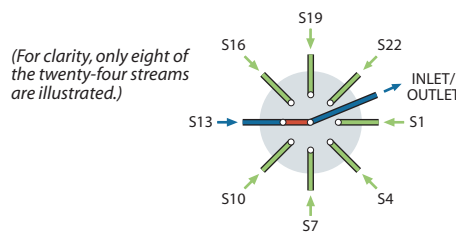

SPECS
100 psi liq
50°C max
 PPS stator
 Valcon E2 rotor

- OPTIONS**
- Optional bore:
 0.5 mm (.020")
 1.0 mm (.040")
 - 2", 3", 4", and 6" standoffs
 - Consult the factory for optional materials.

	20 Position		24 Position		26 Position	
	Prod No	Price	Prod No	Price	Prod No	Price
With microelectric actuator	C35Z-31820EMT	\$1660	C35Z-31824EMT	\$1715	C35Z-31826EMT	\$1715
Replacement valve	C35Z-31820D	630	C35Z-31824D	685	C35Z-31826D	685
Replacement rotor	C35Z-31R20	150	C35Z-31R20	150	C35Z-31R20	150



Model C35Z
 26 positions
 1/16" ZDV fittings


OPTIONAL FLOWPATHS

Model C35Z valves select and isolate one of 20-26 streams, with the remainder dead-ended.


Model C35ZF, the flow-through version, is similar to the C35Z but its non-selected streams continue flowing through individual outlets. 10, 12, and 13 positions are available.

Model C35ZT, the trapping version, is similar to the C35ZF but has a second selected port. Non-selected streams continue flowing. 10, 12, and 13 positions are available.

Call for pricing and information.

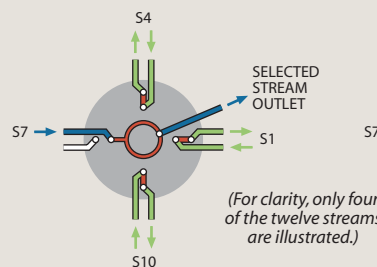

Model C35ZF
 schematic



Model C35ZT
 schematic


Stream selector, 1/2-20 fittings for 1/4" tubing, 4.6 mm ports (.180")

Model C45

SPECS
100 psi liq
50°C max
 PPS stator
 Valcon TF rotor

Manual version not available.
 Includes Cheminert 1/2-20 flangeless fittings for 1/4" tubing, Delrin nuts and CTFE ferrules.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.
 Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.



Low pressure
Stream selector
1/2-20 Internal
1/4" **4.6 mm**

OPTIONS

- 2", 3", 4", and 6" standoffs
- Consult the factory for optional materials.
- 8 position selectors are available with 3 mm (.120") ports


	4 Position		6 Position	
	Prod No	Price	Prod No	Price
With pneumatic actuator	C45-9784A	\$930	C45-9786A	\$985
With std electric actuator	C45-9784E	1335	C45-9786E	1390
With microelectric actuator	C45-9784EMT	1555	C45-9786EMT	1610
Replacement valve	C45-9784D	525	C45-9786D	580
Replacement rotor	C45-97R4	110	C45-97R6	110

Fittings for C45 valves



For additional 1/2-20 fittings and adapters, see page 72.

	Prod No	Price
Delrin nut	CFL-4D	\$6
CTFE nut	CFL-4KF	8
PPS nut	CFL-4PPS	7
CTFE ferrule	CFL-CB4KF-S	5

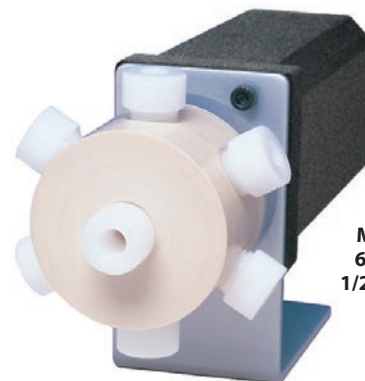

Model C45
6 positions
1/2-20 fittings

MORE INFORMATION

- Actuators
 Air page 194
 Microelectric .. 190-191
 Standard electric ... 193
- Materials
 Metals..... 254-255
 Polymers 256
 Valve rotors..... 257
- Standoff assemblies 205-207

OEM – Microbore HPLC

NEW Integrated motor/valve, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C52

5,000 psi

Microbore

Integrated

1/16" 0.25 mm

See page 149 for detailed information on Model C52 valves.

Also available in vertical port version. Contact the factory.

Includes stainless steel nuts and ferrules of the stator material.

Valves with PAEK stators have PEEK nuts and ferrules.

SPECS

5,000 psi liq
40°C max

N60 stainless stator
Valcon H rotor

5,000 psi liq
40°C max

PAEK stator
Valcon E rotor



4 Port

Prod No Price



6 Port*

Prod No Price



8 Port

Prod No Price



10 Port

Prod No Price

N60 stainless stator

With integrated actuator	C52-1004I	\$900	C52-1006I	\$900	C52-1008I	\$950	C52-1000I	\$1000
With motor/sensor only	C52-1004I-S	750	C52-1006I-S	750	C52-1008I-S	800	C52-1000I-S	850
With motor only	C52-1004IX	700	C52-1006IX	700	C52-1008IX	750	C52-1000IX	800
Replacement rotor	C2-10R4	72	C2-10R6	72	C2-10R8H	72	C2-10R0H	72
Replacement stator	C52-1C04	385	C52-1C06	385	C52-1C08	440	C52-1C00	495

PAEK stator


With integrated actuator	C52-1344I	1000	C52-1346I	1000	C52-1348I	1050	C52-1340I	1100
With motor/sensor only	C52-1344I-S	850	C52-1346I-S	850	C52-1348I-S	900	C52-1340I-S	950
With motor only	C52-1344IX	800	C52-1346IX	800	C52-1348IX	850	C52-1340IX	900
Replacement rotor	C2-13R4	72	C2-13R6	72	C2-13R8H	72	C2-13R0H	72
Replacement stator	C52-1C44	495	C52-1C46	495	C52-1C48	550	C52-1C40	605

OPTIONS


■ **Vertical port version.**
(Model C52V)
Contact the factory for more information.

■ Optional 0.40 mm (.016") and 0.75 mm ports (.030") available

■ Titanium and Hastelloy stators available

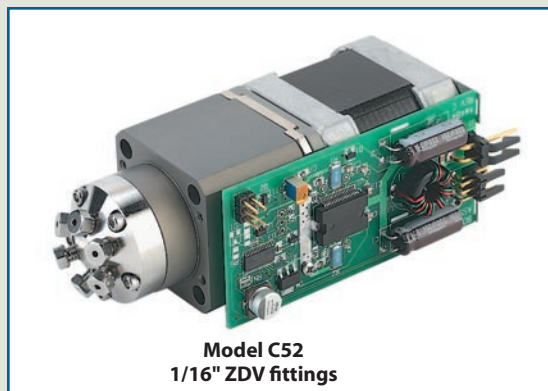

Model C52
1/16" ZDV fittings

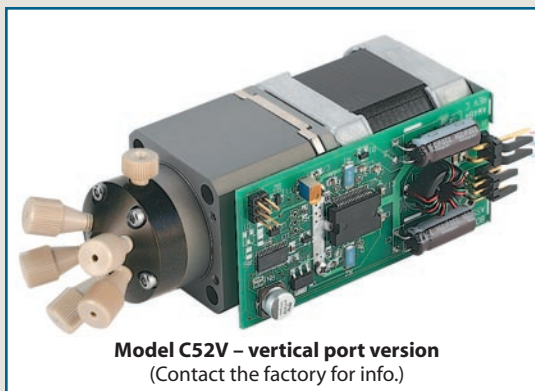

Model C52V – vertical port version
(Contact the factory for info.)

Sample loops

for C52 injectors

Each metal loop includes two stainless steel nuts and ferrules.

Each PEEK loop includes two PEEK nuts and ferrules.

Volume	Stainless Steel		PEEK (for PAEK stators)	
	Prod No	Price	Prod No	Price
2 µl	CSL2	\$22.50	CZSL2PK	\$31.25
5 µl	CSL5	22.50	CZSL5PK	31.25
10 µl	CSL10	22.50	CZSL10PK	31.25
20 µl	CSL20	22.50	CZSL20PK	27.50
50 µl	CSL50	22.50	CZSL50PK	25.00
100 µl	CSL100	31.25	CZSL100PK	25.00
250 µl	CSL250	31.25	CZSL250PK	31.25
500 µl	CSL500	31.25	CZSL500PK	37.50
1 ml	CSL1K	35.00	CZSL1KPK	50.00
2 ml	CSL2K	45.00	CZSL2KPK	68.75
5 ml	CSL5K	52.50	CZSL5KPK	106.25
10 ml	CSL10K	68.75	-	-



MORE INFORMATION

Materials

Metals page 254-255

Polymers 256

Valve rotors 257

ABOUT LOOPS

■ Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, and PTFE (see pages 254-255).

■ Metal loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

Microbore centered port injector, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C3

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor

Includes stainless steel nuts and ferrules. Valves with PAEK stators have PEEK nuts and ferrules.


Includes one 5 µl loop of the stator material. Includes syringe fill port for 22 gauge 3/4" and 2" needle.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.



- 5,000 psi**
- Microbore**
- Centered port**
- 1/16" 0.25 mm**

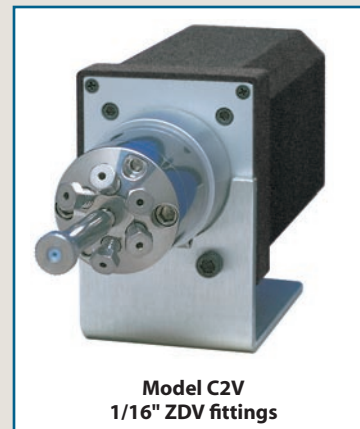


Model C2V
1/16" ZDV fittings

N60 stainless stator		PAEK stator	
Prod No	Price	Prod No	Price
Manual	C3-1006 \$605	C3-1346	\$715
With pneumatic actuator	C3-1006A 855	C3-1346A	965
With standard electric actuator	C3-1006E 1175	C3-1346E	1285
With microelectric actuator	C3-1006EH 1345	C3-1346EH	1455
Replacement valve	C3-1006D 605	C3-1346D	715
Replacement rotor	C2-10R6 72	C2-13R6	72
Replacement stator	C3-1C06 440	C3-1C46	550

OPTIONS

- Titanium and Hastelloy stators available



Order loops from page 159.

Microbore vertical port injector, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C2V

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor

Includes stainless steel nuts and ferrules. Valves with PAEK stators have PEEK nuts and ferrules.


Includes one 5 µl loop of the stator material.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.



- 5,000 psi**
- Microbore**
- Vertical port**
- 1/16" 0.25 mm**

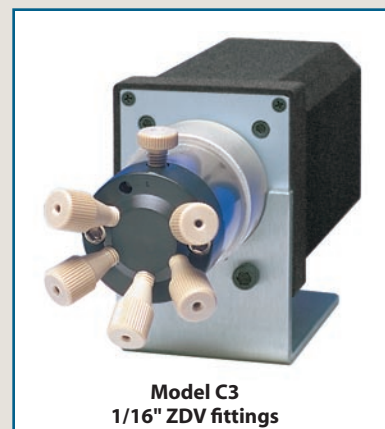

Model C3
1/16" ZDV fittings

N60 stainless stator		PAEK stator	
Prod No	Price	Prod No	Price
Manual	C2V-1006 \$605	C2V-1346	\$715
With pneumatic actuator	C2V-1006A 855	C2V-1346A	965
With standard electric actuator	C2V-1006E 1175	C2V-1346E	1285
With microelectric actuator	C2V-1006EH 1345	C2V-1346EH	1455
Replacement valve	C2V-1006D 605	C2V-1346D	715
Replacement rotor	C2-10R6 72	C2-13R6	72
Replacement stator	C2V-1C06 440	C2V-1C46	550

OPTIONS

- Titanium and Hastelloy stators available



Order loops from page 159.

OEM – Analytical HPLC

NEW Integrated motor/valve, 1/16" Valco fittings, 0.40 mm ports (.016")

Model C52

- 5,000 psi
- Analytical
- Integrated
- 1/16" 0.40 mm

See page 149 for detailed information on Model C52 valves. Includes stainless steel nuts and ferrules of the stator material. Valves with PEEK stators have PEEK nuts and ferrules.

SPECS
5,000 psi liq
40°C max
 N60 stainless stator
 Valcon H rotor
5,000 psi liq
40°C max
 PEEK stator
 Valcon E rotor



4 Port

Prod No Price



6 Port*

Prod No Price



8 Port

Prod No Price



10 Port

Prod No Price

N60 stainless stator


With integrated actuator	C52-2004I	\$750	C52-2006I	\$750	C52-2008I	\$800	C52-2000I	\$850
With motor/sensor only	C52-2004I-S	600	C52-2006I-S	600	C52-2008I-S	650	C52-2000I-S	700
With motor only	C52-2004IX	550	C52-2006IX	550	C52-2008IX	600	C52-2000IX	650
Replacement rotor	C2-20R4	72	C2-20R6	72	C2-20R8H	72	C2-20R0H	72
Replacement stator	C52-2C04	220	C52-2C06	220	C52-2C08	275	C52-2C00	330

PEAK stator


With integrated actuator	C52-2344I	850	C52-2346I	850	C52-2348I	900	C52-2340I	950
With motor/sensor only	C52-2344I-S	700	C52-2346I-S	700	C52-2348I-S	750	C52-2340I-S	800
With motor only	C52-2344IX	650	C52-2346IX	650	C52-2348IX	700	C52-2340IX	750
Replacement rotor	C2-23R4	72	C2-23R6	72	C2-23R8H	72	C2-23R0H	72
Replacement stator	C52-2C44	330	C52-2C46	330	C52-2C48	385	C52-2C40	440

OPTIONS

- **Vertical port version.** (Model C52V)
Contact the factory for more information.
- Optional 0.25 mm (.010") and 0.75 mm ports (.030") available
- Titanium and Hastelloy stators available

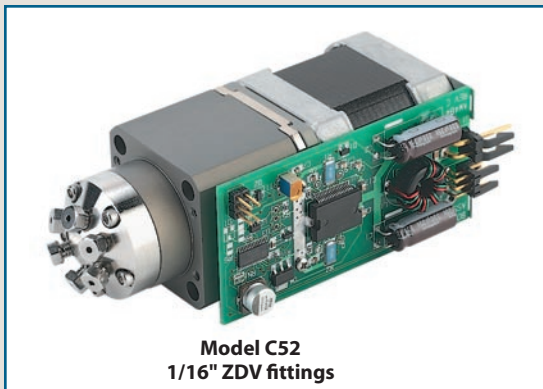

Model C52
1/16" ZDV fittings

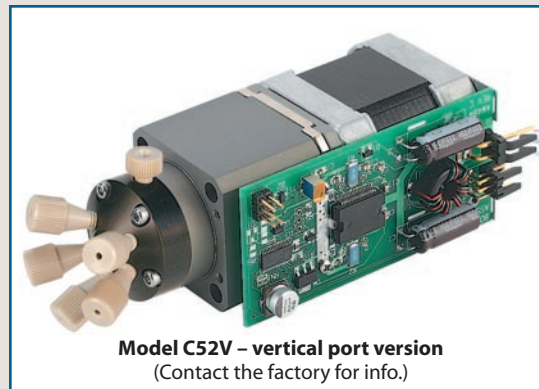

Model C52V – vertical port version
(Contact the factory for info.)

Sample loops for C52 injectors

Each metal loop includes two stainless steel nuts and ferrules.
 Each PEEK loop includes two PEEK nuts and ferrules.

Volume	Stainless Steel		PEEK (for PEEK stators)	
	Prod No	Price	Prod No	Price
2 µl	CSL2	\$22.50	CZSL2PK	\$31.25
5 µl	CSL5	22.50	CZSL5PK	31.25
10 µl	CSL10	22.50	CZSL10PK	31.25
20 µl	CSL20	22.50	CZSL20PK	27.50
50 µl	CSL50	22.50	CZSL50PK	25.00
100 µl	CSL100	31.25	CZSL100PK	25.00
250 µl	CSL250	31.25	CZSL250PK	31.25
500 µl	CSL500	31.25	CZSL500PK	37.50
1 ml	CSL1K	35.00	CZSL1KPK	50.00
2 ml	CSL2K	45.00	CZSL2KPK	68.75
5 ml	CSL5K	52.50	CZSL5KPK	106.25
10 ml	CSL10K	68.75	–	–



MORE INFORMATION

Materials
 Metals page 254-255
 Polymers 256
 Valve rotors. 257

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, and PTFE (see pages 254-256).
- Metal loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

Analytical centered port injector, 1/16" Valco fittings, 0.40 mm ports (.016")

Model C3

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor

Includes stainless steel nuts and ferrules. Valves with PAEK stators have PEEK nuts and ferrules.

Includes one 20 µl loop of the stator material. Includes syringe fill port for 22 gauge 3/4" and 2" needle.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.




5,000 psi

Analytical

Centered port


1/16" 0.40 mm

	N60 stainless stator		PAEK stator	
	Prod No	Price	Prod No	Price
Manual	C3-2006	\$440	C3-2346	\$550
With pneumatic actuator	C3-2006A	690	C3-2346A	800
With standard electric actuator	C3-2006E	1010	C3-2346E	1120
With microelectric actuator	C3-2006EH	1180	C3-2346EH	1290
Replacement valve	C3-2006D	440	C3-2346D	550
Replacement rotor	C2-20R6	72	C2-23R6	72
Replacement stator	C3-2C06	275	C3-2C46	385

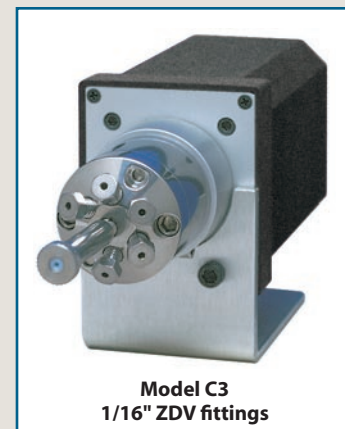

OPTIONS

- Titanium and Hastelloy stators available



Analytical vertical port injector, 1/16" Valco fittings, 0.40 mm ports (.016")

Model C2V

SPECS
5000 psi liq
75°C max
 Metal stator
 Valcon H rotor

5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor

Includes stainless steel nuts and ferrules. Valves with PAEK stators have PEEK nuts and ferrules.

Includes one 20 µl loop of the stator material.

Standard electric actuator:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international.

Microelectric actuator:
 24 VDC, with 110/230 VAC to 24 VDC power supply.




5,000 psi

Analytical

Vertical port


1/16" 0.40 mm

	N60 stainless stator		PAEK stator	
	Prod No	Price	Prod No	Price
Manual	C2V-2006	\$440	C2V-2346	\$550
With pneumatic actuator	C2V-2006A	690	C2V-2346A	800
With standard electric actuator	C2V-2006E	1010	C2V-2346E	1120
With microelectric actuator	C2V-2006EH	1180	C2V-2346EH	1290
Replacement valve	C2V-2006D	440	C2V-2346D	550
Replacement rotor	C2-20R6	72	C2-23R6	72
Replacement stator	C2V-2C06	275	C2V-2C46	385

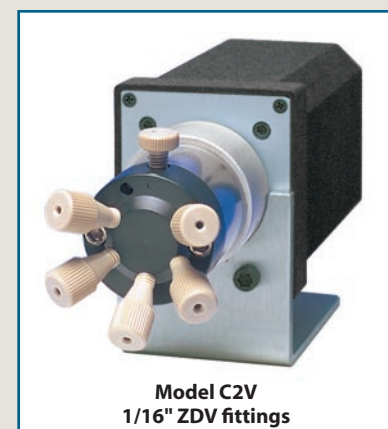

OPTIONS

- Titanium and Hastelloy stators available



CHEMINERT VALVES

OEM – Low Pressure

NEW Integrated motor/valve, 1/16" Valco ZDV fittings, 0.75 mm ports (.030")

Model C62Z

- Low pressure
- Integrated
- 10-32 ZDV
- 1/16" 0.75 mm

Includes Valco ZDV PEEK nuts and ferrules. Sample loops are not included with valves. Order separately.

SPECS
 100 psi gas/ 250 psi liq
 50°C max
 PPS stator
 Valcon E2 rotor



4 Port



6 Port



8 Port




10 Port

	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
With motor, sensor, & controller	C62Z-3184I	\$635	C62Z-3186I	\$635	C62Z-3188I	\$665	C62Z-3180I	\$685
With motor and sensor only	C62Z-3184I-S	485	C62Z-3186I-S	485	C62Z-3188I-S	515	C62Z-3180I-S	535

OPTIONS

- Other polymeric rotors and stators are available

Consult the factory for prices and information.

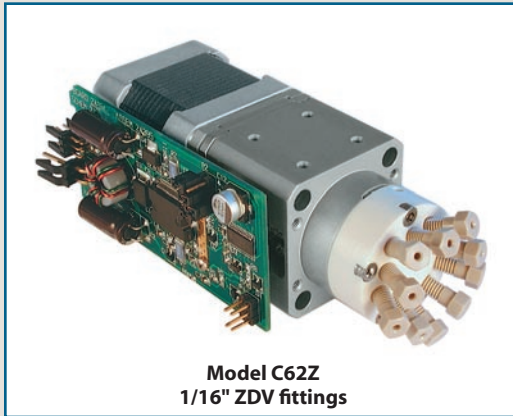

Sample loops

for Model C62Z

Loops include PEEK nuts and ferrules. Loops less than 500 µl are made from 1/16" OD tubing; loops 500 µl or greater are made from 1/8" OD tubing with polymeric unions and 1/16" ends.







Volume	FEP		PTFE		PEEK	
	Prod No	Price	Prod No	Price	Prod No	Price
5 µl	CZSL5FEP	\$25.00	CZSL5TF	\$25.00	CZSL5PK	\$31.25
10 µl	CZSL10FEP	25.00	CZSL10TF	25.00	CZSL10PK	31.25
20 µl	CZSL20FEP	22.50	CZSL20TF	22.50	CZSL20PK	27.50
50 µl	CZSL50FEP	18.75	CZSL50TF	18.75	CZSL50PK	25.00
100 µl	CZSL100FEP	18.75	CZSL100TF	18.75	CZSL100PK	25.00
250 µl	CZSL250FEP	22.50	CZSL250TF	22.50	CZSL250PK	31.25
500 µl	CZSL500FEP	25.00	CZSL500TF	25.00	CZSL500PK	37.50
1 ml	CZSL1KFEP	30.00	CZSL1KTF	30.00	CZSL1KPK	50.00
2 ml	CZSL2KFEP	37.50	CZSL2KTF	37.50	CZSL2KPK	68.75

MORE INFORMATION

Materials
 Metals page 254-255
 Polymers 256
 Valve rotors 257





NEW Integrated motor/valve, 1/4-28 fitting details for 1/16" tubing, 0.75 mm ports (.030")

Model C62

SPECS 100 psi gas/ 250 psi liq 75°C max PPS stator Valcon E2 rotor	Includes multicolored Cheminert flangeless fittings for 1/16" tubing.	Sample loops are not included with valves. Order separately.	Low pressure							
			Integrated							
			1/4-28 Internal							
			1/16"	0.75 mm						
			CE							
										
			4 Port	6 Port	8 Port	10 Port				
			Prod No	Price	Prod No	Price	Prod No	Price		
With motor, sensor, & controller			C62-3184I	\$635	C62-3186I	\$635	C62-3188I	\$720	C62-3180I	\$740
With motor and sensor only			C62-3184I-S	485	C62-3186I-S	485	C62-3188I-S	570	C62-3180I-S	590

NEW Integrated motor/valve, 1/4-28 fitting details for 1/8" tubing, 1.50 mm ports (.060")

Model C62

SPECS 100 psi gas/ 250 psi liq 75°C max PPS stator Valcon E2 rotor	Includes multicolored Cheminert flangeless fittings for 1/8" tubing.	Sample loops are not included with valves. Order separately.	Low pressure							
			Integrated							
			1/4-28 Internal.							
			1/8"	1.50 mm						
			CE							
										
			4 Port	6 Port	8 Port	10 Port				
			Prod No	Price	Prod No	Price	Prod No	Price		
With motor, sensor, & controller			C62-6184I	\$635	C62-6186I	\$635	C62-6188I	\$720	C62-6180I	\$740
With motor and sensor only			C62-6184I-S	485	C62-6186I-S	485	C62-6188I-S	570	C62-6180I-S	590


Sample loops

for Model C62

Loops include flangeless fittings with natural color nuts. Loops less than 500 µl are made from 1/16" OD tubing; loops 500 µl or greater are made from 1/8" OD tubing.



Volume	FEP		PTFE		PEEK	
	Prod No	Price	Prod No	Price	Prod No	Price
20 µl	CFSL20FEP	\$17.50	CFSL20TF	17.50	CFSL20PK	\$25.00
50 µl	CFSL50FEP	17.50	CFSL50TF	17.50	CFSL50PK	25.00
100 µl	CFSL100FEP	17.50	CFSL100TF	17.50	CFSL100PK	25.00
250 µl	CFSL250FEP	17.50	CFSL250TF	17.50	CFSL250PK	25.00
500 µl	CFSL500FEP	20.00	CFSL500TF	20.00	CFSL500PK	30.00
1 ml	CFSL1KFEP	25.00	CFSL1KTF	25.00	CFSL1KPK	40.00
2 ml	CFSL2KFEP	30.00	CFSL2KTF	30.00	CFSL2KPK	62.50

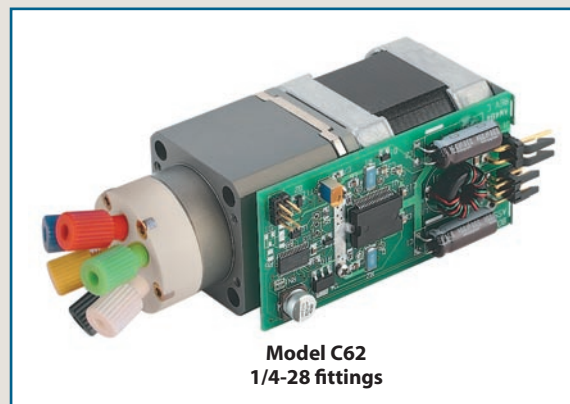


NEW Integrated motor/stream selector, 1/16" Valco ZDV fittings, 0.40 mm ports (.016")

Model C55

- 5,000 psi
- Integrated
- Stream selector
- 10-32 ZDV
- 1/16" 0.40 mm

Includes stainless steel nuts and ferrules of the stator material.

Valves with PAEK stators have PEEK nuts and ferrules.



SPECS
5000 psi liq
50°C max
 Metal stator
 Valcon H rotor



5000 psi liq
50°C max
 PAEK stator
 Valcon E rotor



	4 Position		6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
N60 stainless stator								
With integrated actuator	C55-2004I	\$825	C55-2006I	\$825	C55-2008I	\$875	C55-2000I	\$925
With motor/sensor only	C55-2004I-S	675	C55-2006I-S	675	C55-2008I-S	725	C55-2000I-S	775
With motor only	C55-2004IX	625	C55-2006IX	625	C55-2008IX	675	C55-2000IX	725
Replacement rotor	C5-20R4	72	C5-20R6	72	C5-20R8H	72	C5-20R0H	72
Replacement stator	C55-2C04	265	C55-2C06	265	C55-2C08	320	C55-2C00	375
PAEK stator								
With integrated actuator	C55-2344I	925	C55-2346I	925	C55-2348I	975	C55-2340I	1025
With motor/sensor only	C55-2344I-S	775	C55-2346I-S	775	C55-2348I-S	825	C55-2340I-S	875
With motor only	C55-2344IX	725	C55-2346IX	725	C55-2348IX	775	C55-2340IX	825
Replacement rotor	C5-23R4	72	C5-23R6	72	C5-23R8H	72	C5-23R0H	72
Replacement stator	C55-2C44	375	C55-2C46	375	C55-2C48	430	C55-2C40	485

OPTIONS

- Optional bore:
0.25 mm (.010")
0.75 mm (.030")
- 4 and 8 positions available

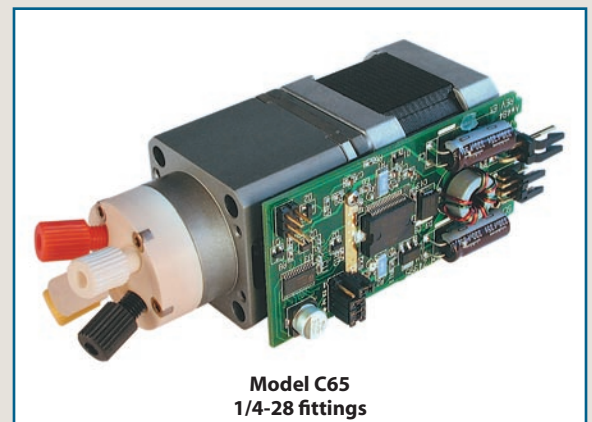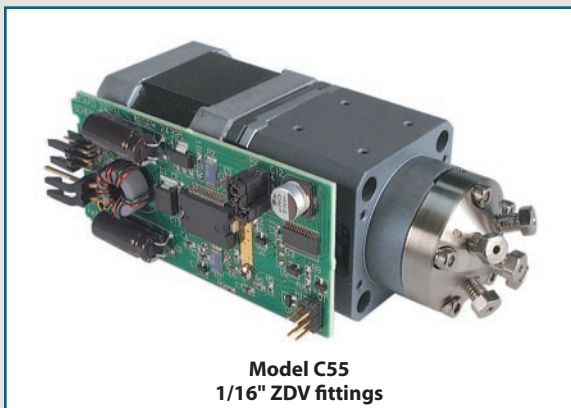


NEW Integrated motor/stream selector, 1/16" Valco ZDV fittings, 0.75 mm ports (.030")

Model C65Z

SPECS

100 psi gas/ 250 psi liq
50°C max
PPS stator
Valcon E2 rotor

Includes Valco ZDV
PEEK nuts and ferrules.



Low pressure

Integrated

Stream selector

10-32 ZDV

1/16" 0.75 mm

CE

	4 Position		6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
With integrated actuator	C65Z-3184I	\$670	C65Z-3186I	\$670	C65Z-3188I	\$710	C65Z-3180I	\$730
With motor and sensor only	C65Z-3184I-S	520	C65Z-3186I-S	520	C65Z-3188I-S	560	C65Z-3180I-S	580


NEW Integrated motor/stream stream selector, 1/4-28 fittings for 1/16" tubing, 0.75 mm ports (.030")

Model C65

SPECS

100 psi gas/ 250 psi liq
50°C max
PPS stator
Valcon E2 rotor

Includes multicolored
Cheminert flangeless
fittings for 1/16"
tubing. See photo on facing
page.



Low pressure

Integrated

Stream selector

1/4-28 Internal

1/16" 0.75 mm

CE

	4 Position		6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
With integrated actuator	C65-3184I	\$670	C65-3186I	\$670	C65-3188I	\$765	C65-3180I	\$785
With motor and sensor only	C65-3184I-S	520	C65-3186I-S	520	C65-3188I-S	615	C65-3180I-S	635


NEW Integrated motor/stream stream selector, 1/4-28 fittings for 1/8" tubing, 1.50 mm ports (.060")

Model C65

SPECS

100 psi gas/ 250 psi liq
50°C max
PPS stator
Valcon E2 rotor

Includes multicolored
Cheminert flangeless
fittings for 1/8"
tubing. See photo on facing
page.



Low pressure

Integrated

Stream selector

1/4-28 Internal

1/8" 1.50 mm

CE

	4 Position		6 Position		8 Position		10 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
With integrated actuator	C65-6184I	\$670	C65-6186I	\$670	C65-6188I	\$765	C65-6180I	\$785
With motor and sensor only	C65-6184I-S	520	C65-6186I-S	520	C65-6188I-S	615	C65-6180I-S	635



Actuators and Accessories

Two position valves switch back and forth between Load and Inject, or Position A and Position B. Selectors operate in continuous revolutions by incremental steps. There are several ways to actuate each type of valve, along with a number of supporting controllers and devices to interface the actuators with computer-controlled systems.

With the exception of low pressure Cheminert selectors, we recommend that selectors be purchased with air or electric actuators. While a manual detent assembly is available, the higher turning torque of our other selector designs makes them more difficult to position accurately by hand.

Manual Actuation

Simplicity and low cost are the main advantages of manual actuation. Some models can be ordered with position feedback, an option which sends a signal to start a data system when the valve is switched.



Knobs
page 204

Air Actuation

Air actuators are useful in situations where any spark could be disastrous or where there is no electricity available. They are small, relatively inexpensive, very rugged and dependable, and field-serviceable. Low gas consumption and lightweight, compact construction make the air actuator suitable for aerospace flight hardware applications as well as laboratory or process applications.

With the addition of a DVI (digital valve interface) to translate the timed event signals into the necessary air pulses, air actuators can be automatically switched by a data system, integrator, or controller such as our DVSP (digital valve sequence programmer) or SVI (serial valve interface).



Air actuator
Two position, page 195
Selector, page 194

MORE INFORMATION Actuators

Air pages 194-195
Microelectric .. 188-191
Standard
electric 193

Controllers and Accessories

41E1 198
4-way solenoid
air valve
DVI 199
Digital valve interface
DVSP 196
Digital valve sequence
programmer
HSSA 198
High speed switching
accessory
MSVA 198
Manifold 3-way
solenoid valve
assembly
PFAF 199
Position feedback for
air actuators
RAD 204
Right angle drive
SVI 197
Serial valve interface

Mounting Hardware

Closemount
assembly 208-209
Standoff
assembly 205-207

Electric Actuation

The **microelectric actuator** features automatic valve alignment, high-speed switching, compact size, 24 VDC power input, and reversible direction (in the selector model).

If lower cost outranks those factors in your consideration, our **standard electric actuator** (110/230 VAC) offers a dependable, economical solution.

Both types of electric actuators can be operated manually with a controller assembly that features position-indicating LEDs and a toggle

switch, but can be easily connected to an external data system for fully automated control. The microelectric actuator has built-in multidrop RS-232 (RS-485 optional) for bidirectional communications. The SVI (serial valve interface) was designed specifically to interface our standard electric actuators with RS-232 compatible systems, allowing control of up to six actuators via modem, BASIC program, or Valco-supplied PC software.

The new **universal actuator** operates virtually any Valco or Cheminert rotary valve – two position and selector alike – greatly simplifying the electronic aspect of instrument design.



Microelectric actuator
Two position, page 189
For selectors (multiposition), page 190



Standard electric actuator
Two position and selector, page 193



Universal actuator
page 192



Standoff assemblies
page 205

Standoff Assemblies

All valves, no matter what their actuation mode, can be ordered with a standoff assembly. The standoff is an extension shaft mounted between the handle or actuator and the valve, allowing the valve to be installed within a heated zone while the actuator or handle remains outside at ambient temperature. The standoff extends through the oven wall, and is secured by a clamp ring supplied with the assembly. Standard standoff assembly lengths are 2", 3", 4", and 6". Other lengths can be special-ordered at additional cost.

Right Angle Drive


Some installations don't allow the valve and actuator to be installed in a typical in-line configuration. The RAD (right angle drive) is a 90° gearbox which permits the actuator or handle to be installed at a right angle to the valve. The RAD fits all VICI electric and air actuators.



Right angle drive
page 204

Microelectric Actuators

- CE certified
- Automatic alignment
- Manual control with position indication
- Remote control by contact closures or TTL logic level signals
- RS-232 bidirectional communication (optional RS-485)
- Two position and selector versions
- Universal power supply, 110/230 VAC to 24 VDC

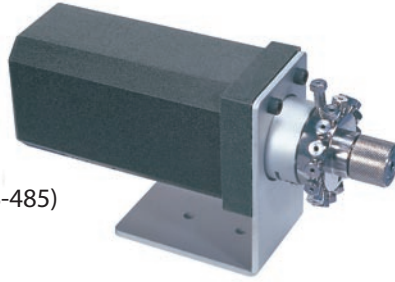

The microelectric actuator offers Valco dependability in a unit which is less than half the size of our standard model. The actuator consists of a control module, a stepper motor/gearbox assembly, a manual remote control, interconnecting cables, and a 110/230 VAC to 24 VDC power supply. The composite version combines the stepper motor/gearbox assembly with the control module. The RS-232 interface cable, if required, must be ordered separately.

Since different valve models have varying actuation torque requirements, there are five microelectric actuator models for two position valves – EQ, EH, EP, ED, and ET – and two versions

for multiposition – EMH and EMT. Consult the chart on the respective ordering information page to determine which model meets your requirements. When a valve and actuator are ordered at the same time, the proper actuator is supplied automatically.

An actuator can be specified with closemount hardware, with a standoff, or with just the standoff mounting hardware, if your valve already has a standoff. The microelectric actuator is designed for room temperature use. Valves which will be mounted in ovens require a standoff assembly, which locates the actuator out of the heated zone.

MORE INFORMATION

Microelectric actuators
For two position 189
For selectors 190-191

Mounting Hardware

Closemount
hardware page 208
Right angle drive 204
Standoff assembly 205
Standoff mounting
hardware 205

TECH TIP

Electric actuators can be directly controlled by signals from microprocessor-based instruments, data systems, or valve programmers, unlike air actuators, which require an interface to convert the signal to an air pulse.

ORDER TIP

To purchase a **valve with a microelectric actuator installed**, see valve ordering information.

Valco

Injectors and
valves pp 102-116
Selectors 122-133

Cheminert

Injectors and
valves 152-167
Selectors 170-177

Two Position Microelectric Actuators



- CE certified
- Stall-sensing circuitry – no mechanical microswitches
- High speed switching – <100 ms in EQ model
- A model for every valve we sell

The two position microelectric actuator features exclusive stall-sensing circuitry which eliminates problems associated with valve/actuator misalignment. Power to the actuator motor is switched off when the driver pin goes against the stop of the valve cutout – no sooner, no later – and it's all done without any mechanical microswitches. Not only does this mean that alignment problems are a thing of the past, it means that you can stock one actuator for valves that turn 30°, 36°, 45°, 60°, 90°, or anything in between.

During initialization, the valve rotates at moderate speed while the actuator waits to sense the stall. Once the rotation angle has been measured and confirmed by repetition, the angle is memorized and actuation takes place at maximum speed. Valve position memory is maintained even in the event of a power failure. There is nothing more to do unless you wish to install a valve with a different angle of rotation. In that event, cycling the actuator with no valve mounted sets up reinitialization.

WHICH MODEL FOR WHICH TWO POSITION VALVE?

Fitting size	Valve type	Actuator model	Valve type	Actuator model
Valco GC				
1/32"	W	EH	W	EP
1/16"	W	EH	W	EP
1/16"	UW	ED	UW	ED
1/8"	UW	ED	UW	ED
1/4"	MW	ET	—	—
Valco HPLC				

Chem inert HPLC & Low Pressure

Model C72X	
8 and 10 ports	ED
All other valves	EH


Microelectric actuators

for two position valves

Standard voltage 24 VDC. Includes autosensing 24 VDC power supply. Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available. Consult the chart below to determine which actuator model is best suited for your valve.

Description	With closemount assembly		With 2" standoff assembly		For use with existing standoff	
	Prod No	Price	Prod No	Price	Prod No	Price
Highest speed actuator	EQ	\$740	EQ2	\$740	EQS	\$700
High speed actuator	EH	740	EH2	740	EHS	700
Medium torque actuator	EP	740	EP2	740	EPS	700
High torque actuator	ED	800	ED2	800	EDS	760
Highest torque actuator	ET	800	ET2	800	ETS	760

SPEED AND TORQUE: Inversely proportional

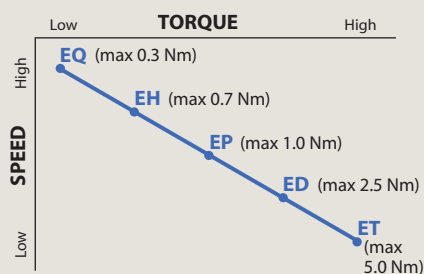

RS-232 interface cable

Description	Prod No	Price
RS-232 interface cable	I-22697	\$29

Multi-drop cables

for multiple microelectric actuators


Multi-drop cables permit a single serial port (RS-232) to control multiple microelectric two position and multiposition actuators. Cables have one female DB9 and 2 to 8 male DB9 connectors – approximately 6" long.

Note: The RS-232 interface cable (I-22697), above, is required for **each** actuator.

No. of actuators to be controlled	Prod No	Price
2	I-22897-02	\$75
3	I-22897-03	87
4	I-22897-04	97
5	I-22897-05	110
6	I-22897-06	120
8	I-22897-08	145

TECH TIP

Multi-drop cables permit a single serial port (RS-232) to control multiple microelectric actuators.

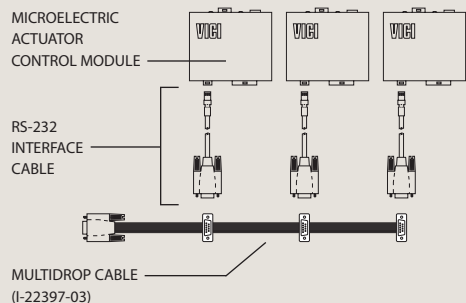

Microelectric Actuators for Selectors

- CE certified
- Direction reversal
- Position indication
 - LED display
 - RS-232 output
 - BCD 5V negative true output
- Manual control
 - Step and home functions
 - Clockwise and counterclockwise functions
- Remote control
 - Step and home functions with contact closure
 - Direct position access with BCD 5V negative true input
 - Direct position access with RS-232 input (RS-485 optional)
- Automatic self-alignment with keyed valves and standoffs



One actuator can be used on any selector, from 2 to 96 positions – you tell the actuator how many steps to make through its 360° of rotation. So you can stock only one type of actuator even if you have 4, 6, 8, 10, 12, and 16 position valves. Valve position memory is maintained even in the event of a power failure.

The direction reversal feature means that if a 6 position stream selection valve is on stream 1 and you select stream 6, you have the option of stepping “backwards” to stream 6 instead of passing through 2, 3, 4, and 5. The RS-232 input offers various commands like position access, direction control, shortest route, etc. (The RS-232 cable must be ordered separately.)

MORE INFORMATION

Microelectric actuators
For two position 189

Mounting Hardware

Closemount
hardware page 208
Right angle drive 204
Standoff assembly 205
Standoff mounting
hardware 205

ORDER TIP

To purchase a **valve with a microelectric actuator installed**, see valve ordering information.

Valco

Injectors and
valves pp 102-116
Selectors 122-133

Cheminert

Injectors and
valves 152-167
Selectors 170-177

Microelectric Actuators for Selectors

Microelectric actuators

for selectors

Standard voltage 24 VDC. Includes autosensing 24 VDC power supply.
Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available.
Consult the chart below to determine which actuator model is best suited for your valve.

Description	With keyed closemount assembly		With keyed 2" standoff assembly		For use with existing standoff	
	Prod No	Price	Prod No	Price	Prod No	Price
High speed actuator	EMH	\$970	EMH2	\$970	EMHS	\$930
High torque actuator	EMT	1030	EMT2	1030	EMTS	990

RS-232 interface cable

Description	Prod No	Price
RS-232 interface cable	I-22697	\$29

Multi-drop cables

for multiple microelectric actuators

Multi-drop cables permit a single serial port (RS-232) to control multiple microelectric two position and selector actuators. Cables have one female DB9 and 2 to 8 male DB9 connectors – approximately 6" long.

Note: The RS-232 interface cable (I-22697), above, is required for **each** actuator.

No. of actuators to be controlled	Prod No	Price
2	I-22897-02	\$75
3	I-22897-03	87
4	I-22897-04	97
5	I-22897-05	110
6	I-22897-06	120
8	I-22897-08	145

WHICH MODEL FOR WHICH SELECTOR?

Valve model Actuator model

Valco

All valves EMT

Cheminert high pressure


C5 4, 6 positions EMH
 8, 10 positions EMT
 C75NX EMH
 C75H EMH

Cheminert low pressure

C25Z EMH
 C25 EMH
 C35Z EMH
 C45 EMT

TECH TIP

Multi-drop cables permit a single serial port (RS-232) to control multiple microelectric actuators.

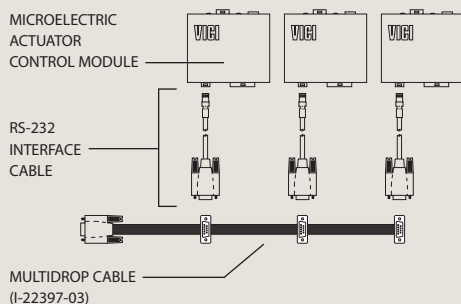

ABOUT STANDOFFS

Keyed standoff assemblies are used with selector (multiposition) microelectric actuators, to key the valve body to the actuator and standoff so that the actuators can self-align and operate valves with any number of positions.

Valco selectors are not keyed unless ordered with a microelectric actuator. To install a microelectric actuator on an existing Valco selector, the key (pin) must be removed from the actuator clamp ring assembly. This can be done easily with a pair of pliers.

See page 207, top and bottom illustrations, for drawings of keyed standoff assemblies with multiposition microelectric actuators.

NEW OEM – Universal Actuators

- One actuator works with two position valves *and* selectors
- Simplified, universal communication protocol
- Variety of interfaces
- Three versions for various valve torque requirements



Shown with BCD option

The universal actuator allows instrument manufacturers to use a single motor and control software to operate virtually any Valco or Cheminert rotary valve. This simplifies the electronic aspect of instrument design and streamlines the development process.

All our Valco and Cheminert valves and selectors, with their wide range of turning torques, are covered by three actuator versions: high speed, medium speed/medium torque, and high torque. (See charts below)

Actuators listed below include universal 24 volt DC power supply and manual interface. An OEM version that excludes these items is also available. Current interface options include RS232/485, USB, and BCD.

While the actuators listed on this page are universal, the valve mounting hardware is not. The product numbers shown below do not include the hardware required for mounting a valve, since the necessary hardware depends on the valve type. If you are ordering the actuator for use

with an *existing* valve, call our sales or technical staff to determine the correct hardware needed. If you want to order the universal actuator with a *new* valve, simply substitute the actuator product number in place of a different actuator and we'll provide the correct hardware. For example, to order the universal actuator in place of the air actuator in A4C6UWE, order p/n EUD4C6UWE, or to order C2-2006EH with a universal actuator, order C2-2006EUH.

NEW Universal actuators

Description	High speed (EUH)		Medium torque (EUD)		High torque (EUT)	
	Prod no	Price	Prod no	Price	Prod no	Price
Without interface	EUH	\$760	EUD	\$780	EUT	\$800
With RS-232/485	EUHA	790	EUDA	810	EUTA	830
With USB	EUHB	790	EUDB	810	EUTB	830
With BCD	EUHC	790	EUDC	810	EUTC	830



Cheminert HPLC selector on universal actuator

Refer to these charts to determine which of the three versions best suits the valves you use, or simply ask our sales or technical staff.

WHICH MODEL FOR WHICH SELECTOR?

Valco

	Actuator model
All valves	EUT

Cheminert

	Actuator model	Actuator model
	HPLC	UHPLC
4 and 6 position *	EUH	EUH
8 and 10 position	EUD	EUD
	Low pressure	
Model C25 and C25Z	EUH	
Model C35Z	EUD	
Model C45	EUT	
* 20,000 psi versions use EUD.		


WHICH MODEL FOR WHICH INJECTOR / TWO POSITION VALVE?

Valco

Fitting size	Valve type	Actuator model	Actuator model
		GC	HPLC
1/32"	W	EUH	EUD
1/16"	W	EUH	EUD
1/16"	UW	EUD	EUD
1/8"	UW	EUD	EUD
1/4"	MW	EUT	—

Cheminert

	Actuator model	Actuator model
	HPLC	UHPLC
4 and 6 ports *	EUH	EUH
8 and 10 ports	EUH	EUD
	Low pressure	
All valves	EUH	
*20,000 psi versions use EUD.		

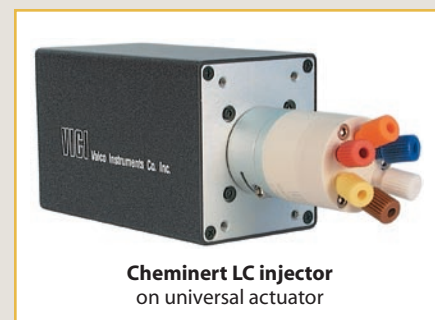

Cheminert LC injector on universal actuator



Valco GC selector on universal actuator

Standard Electric Actuators



Two position standard electric actuators may be operated manually by a toggle switch or automatically by any data system with momentary contact closures or 5 VDC negative true logic outputs. A complete system, the actuator includes interface cable, power cord, and manual controller assembly with position indication.

Multiposition (selector) models work with any of our multiposition valves. The manual controller with LED display allows the user to step sequentially from one position to the next or to return to Position 1 (Home). A data system with momentary contact closures can direct the step and home functions; 5 VDC negative true logic outputs provide direct position access. A 20-conductor interface

cable permits the system to step the actuator sequentially, move the actuator directly to any position, and read the actual valve position.

Standard electric actuators can be ordered with closemount hardware, a standoff, or just the standoff mounting hardware, if your valve already has a standoff. Valves which will be mounted in ovens require a standoff assembly so that the actuator is located out of the heated zone.

The actuator's rotation (two position) or number of positions (multiposition) must be properly matched to the valve's. If you are converting a manual valve to electric actuation and have any doubts about which actuator and hardware you need, call our sales or technical staff for assistance.

ORDER TIP

To purchase a **valve with a standard electric actuator installed**, see valve ordering information.

Valco

Injectors and valves pp 102-116
Multiposition valves 122-133


Cheminert

Injectors and valves 152-167
Multiposition valves 170-177


TECH TIP

Valco two position W and UW type valves and Cheminert valves have the following angles of rotation:

3 port	90°
4 port	90°
6 port	60°
8 port	45°
10 port	36°
12 port	30°
14 port	26°



Valco



Cheminert

MORE INFORMATION Controllers

DVSP page 196
Digital valve sequence programmer
SVI 197
Serial valve interface

Mounting Hardware

Closemount hardware 208
Right angle drive . 204
Standoff assembly 205
Standoff mounting hardware 205

Standard electric actuators

for two position valves

Standard voltage: 110 VAC. (230 VAC and 24 volt CE versions optional. Consult factory for product numbers and pricing.)

Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available.

No. of ports in valve	Description	With closemount assembly		With 2" standoff assembly		For use with existing standoff	
		Prod No	Price	Prod No	Price	Prod No	Price
3, 4	90° rotation	E90	\$570	E902	\$570	E90S	\$530
6	60° rotation	E60	570	E602	570	E60S	530
8	45° rotation	E45	570	E452	570	E45S	530
10	36° rotation	E36	570	E362	570	E36S	530
12	30° rotation	E30	570	E302	570	E30S	530

Standard electric actuators

for selectors

Standard voltage: 110 VAC. (230 VAC optional. Consult factory for product numbers and pricing.)

Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available.

Description	With closemount assembly		With 2" standoff assembly		For use with existing standoff	
	Prod No	Price	Prod No	Price	Prod No	Price
4 position	E4	\$810	E42	\$810	E4S	\$770
4 x 2*	E4X2	810	E4X22	810	E4X2S	770
6 position	E6	810	E62	810	E6S	770
6 x 2**	E6X2	810	E6X22	810	E6X2S	770
8 position	E8	810	E82	810	E8S	770
10 position	E10	810	E102	810	E10S	770
12 position	E12	810	E122	810	E12S	770
16 position	E16	810	E162	810	E16S	770

* The 4 column selection valve, CST4UW, is an 8 position valve and needs a 4 x 2 actuator.

** The 6 column selection valve, CST6UW, is a 12 position valve and needs a 6 x 2 actuator.

Air Actuators

Air actuators offer reliable performance under the most stringent conditions. Low gas consumption and lightweight, compact construction make the air actuator suitable for aerospace flight hardware applications as well as laboratory or process applications.

The standard air actuator is rated for up to 80 psig at temperatures up to 70°C. Generally speaking, valves which will be heated require a standoff assembly, which locates the air actuator out of the heated zone and supports both the valve and actuator. A high temperature model permits both valve and actuator to be mounted within an oven (175°C maximum), but it is not recommended for use below 50°C.




Air Actuators for Selectors

The recommended method for implementing a selector (multi-position) air actuator requires only a single 4-way solenoid. Up to 80 psig may be used without damaging the valve or actuator. Bottled instrument air or nitrogen is recommended.

If plant air from compressors must be used, an oil separator and water dryer are required.

Multiposition air actuators include a rotary switch which may be connected to a digital readout or your own design.

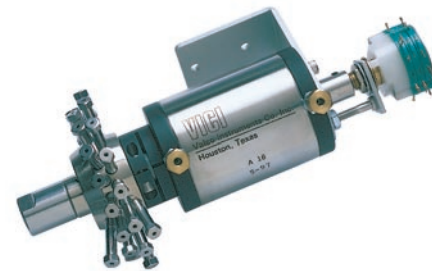

Standard air actuators

for selectors

Temperature range 0-70°C
Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available.

Description	With closemount assembly		With 2" standoff assembly		With standoff mounting hardware	
	Prod No	Price	Prod No	Price	Prod No	Price
4 position	A4	\$405	A42	\$405	A4S	\$365
6 position	A6	405	A62	405	A6S	365
8 position	A8	405	A82	405	A8S	365
10 position	A10	405	A102	405	A10S	365
12 position	A12	405	A122	405	A12S	365
16 position	A16	405	A162	405	A16S	365

High temperature air actuators

for selectors

Temperature range 50-175°C
Standoff version includes a 4" standoff. 2", 3", and 6" standoffs are also available.

Description	With closemount assembly		With 4" standoff assembly		With standoff mounting hardware	
	Prod No	Price	Prod No	Price	Prod No	Price
4 position	AT4	\$405	AT44	\$405	AT4S	\$365
6 position	AT6	405	AT64	405	AT6S	365
8 position	AT8	405	AT84	405	AT8S	365
10 position	AT10	405	AT104	405	AT10S	365
12 position	AT12	405	AT124	405	AT12S	365
16 position	AT16	405	AT164	405	AT16S	365

TECH TIP

The actuator's rotation must be properly matched to the valve's. If you are converting a manual valve to air actuation and have any doubts about which actuator and hardware you need, call our sales or technical staff for assistance.

MORE INFORMATION

PFAF page 199
Position feedback

Mounting Hardware

Closemount hardware page 208
Right angle drive 204
Standoff assembly 205
Standoff mounting hardware 205

Replacement O-rings

Includes a complete set of O-rings for a multiposition air actuator.

Description	Prod No	Price
Standard	ORMP	\$16
High temp	ORTMP	20



ORDER TIP

To purchase a **valve with an air actuator installed**, go directly to valve ordering information.

Two Position Air Actuators

MORE INFORMATION
 HSSA..... page 198
 High speed switching accessory
 PFAF199
 Position feedback

TECH TIP

Here's what you'll get when you order:



Air actuator with a closemount assembly



Air actuator with a 4" standoff assembly



Air actuator for use with an existing standoff

The recommended method for implementing a two position air actuator is a manifold solenoid valve assembly (MSVA), a block-mounted pair of 3-way solenoids that pulses air to the actuator to switch it from position to position. If air is applied continuously, the continuous rotational force applied to the valve can cause sideloading, leaking, and additional wear.

Typical actuation pressure is 40 to 50 psig, but up to 80 psig may be used.

Ideally, only enough air pressure should be used to switch the valve in 1/3 to 1/2 second. Bottled instrument air or nitrogen is recommended. If plant air from compressors must be used, an oil separator and water dryer are required.

A high speed switching accessory (HSSA) can upgrade valve switching times to less than 30 ms with air or 8 ms with helium. A position feedback (PFAF) with contact closures in both positions is also available as an option.

Standard air actuators

for two position valves

Temperature range 0-70°C

Standoff version includes a 4" standoff. 2", 3", and 6" standoffs are also available.

No. of ports in valve	Description	With closemount assembly		With 4" standoff assembly		For use with existing standoff	
		Prod No	Price	Prod No	Price	Prod No	Price
3, 4	90° rotation	A90	\$250	A904	\$250	A90S	\$210
6	60° rotation	A60	250	A604	250	A60S	210
8	45° rotation	A45	250	A454	250	A45S	210
10	36° rotation	A36	250	A364	250	A36S	210
12	30° rotation	A30	250	A304	250	A30S	210

High temperature air actuators

for two position valves

Temperature range 50-175°C

Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available.

No. of ports in valve	Description	With closemount assembly		With 2" standoff assembly		For use with existing standoff	
		Prod No	Price	Prod No	Price	Prod No	Price
3, 4	90° rotation	AT90	\$250	AT902	\$250	AT90S	\$210
6	60° rotation	AT60	250	AT602	250	AT60S	210
8	45° rotation	AT45	250	AT452	250	AT45S	210
10	36° rotation	AT36	250	AT362	250	AT36S	210
12	30° rotation	AT30	250	AT302	250	AT30S	210

Replacement O-rings

Includes a complete set of O-rings for a two position air actuator.

Description	Prod No	Price
Standard	OR	\$14
High temp	ORT	16



Actuator compression fittings

Includes 1/8" compression to 10-32 male thread, plus 1/8" brass ferrule and hex nut.

Description	Prod No	Price
3 piece fitting assembly	F-TCF	\$3



Digital Valve Sequence Programmer (DVSP)

The digital valve sequence programmer (DVSP) is an add-on or stand-alone timer/programmer with 4 intervals, settable in ranges of 0-99 seconds, 0-9.9 minutes, or 0-99 minutes. The DVSP is most commonly used for remote operation of electrical devices such as solenoid valves, Valco two position or multiposition electric actuators, and the Valco DVI (digital valve interface), which converts contact closures into pneumatic pulses for switching Valco two position air actuators.

The DVSP has two operational modes: in the AUTO mode, the DVSP will return to the first interval and begin another sequence after the last interval is completed, and in the SINGLE CYCLE mode it stops after completing one sequence. During a cycle or sequence, simple controls allow the user to stop the cycle, reset it to Interval 1, switch to the AUTO mode, or advance to the next interval. The DVSP can also be wired for remote operation by contact closure from a data system or other control device.

Each interval has one double pole, double throw relay, rated at 5 amps, which provides two sets of contacts with no connection from one side to the other. This means that a single interval can be used to perform two separate functions requiring differing voltage requirements. For example, one side of Relay A (Interval 1) can be used to switch an electric actuator (contact closure) while the other side is connected to 110/230 VAC and switches a 110/230 VAC solenoid valve at the same time as the electric actuator. In addition, Relay E supplies a two second contact. When solenoid valves are wired in series with this relay the result is "pulsed operation" of the air actuator, which avoids the potential valve and actuator problems associated with continuously-applied air pressure.

Both 12 VDC and 110/230 VAC power supplies are included within the DVSP, but the relays may be supplied with power from an external power source. For example, 24 VDC solenoid valves can be switched by the DVSP relays if the 24 volts is supplied to the relays from an external 24 VDC power supply.

DVSP Digital valve sequence programmer

*for all air and
electric actuators*

	Prod No	Price
110 VAC	DVSP4	\$900
230 VAC	DVSP4-220	900



MORE INFORMATION Actuators

Air pages 194-195
Microelectric 188-191
Standard elec 193

Controllers and Interfaces

HSSA 198
High speed
switching accessory
PFAF 199
Position feedback
for air actuators
PFW/PFC 199
Position feedback
for manual valves

Mounting Hardware

Closemount
hardware page 208
Right angle drive 204
Standoff assembly 205
Standoff mounting
hardware 205

Serial Valve Interface (SVI)

The serial valve interface (SVI) is a device that converts commands from a computer, via a serial port, into positional control for two position and selectors (multiposition valves). Each SVI can control up to four air actuated (via a DVI, page 199) or electrically actuated two position valves and two electrically actuated selectors. The timing program can be run in the background, freeing the computer for other applications. Two serial ports (one male, one female) allow up to eight SVIs to be daisy-chained and run from a single serial communication port. In addition to controlling valves, the SVI can be used to control other devices which require logic level, BCD, or single line inputs.

The SVI is a self-contained unit, with its own 110 VAC (or 230 VAC Eurostandard) power supply. There is no need to open the computer to connect the SVI, because its DB-9 to DB-9 RS-232 cable connects to any available serial port. It also includes an interface cable for Valco two position actuators, and two Ansley 20-wire connectors for installation on the interface cable which comes as part of the multiposition electric actuator. For air actuated valves, optional interface cables are available for the DVI, which converts electrical signals to pneumatic pulses.

Software is supplied on a Windows-compatible CD. If different program functionality is needed, information is given in the manual which will assist in writing the necessary software.

SVI Serial valve interface

*for all air and
standard electric actuators*

	<i>Prod No</i>	<i>Price</i>
110 VAC	SVI	\$730
230 VAC	SVI-220	730
DVI/SVI interface cable	I-22239	55



Solenoids and High Speed Accessory

41E1 4-Way solenoid air valve

for selector air actuators

This 4-way solenoid air valve with 1/8" tube fittings is the simplest method of stepping a selector air actuator. Energizing the solenoid steps the valve to its next position, and de-energizing the solenoid resets the mechanical ratchet in the actuator. This implementation, not recommended for two position actuators, can be useful when only a limited number of external events is available on the data system.

	<i>Prod No</i>	<i>Price</i>
110 VAC	41E1-120VAC	\$125
230 VAC	41E1-220VAC	125
24 VAC	41E1-24VAC	125
12 VDC	41E1-12VDC	125
24 VDC	41E1-24VDC	125



MSVA

Manifold 3-way solenoid valve assembly

for two position air actuators

The recommended way to switch two position air actuated valves is to "pulse" a pair of 3-way solenoid valves. This method applies air to the actuator only during switching, and alleviates problems associated with continuous air pressure. The MSVA is a block-mounted pair of 3-way solenoid air valves with 1/8" tube connections, available in 12 VDC, 24 VDC, 24 VAC, 110 VAC, and 230 VAC models.

	<i>Prod No</i>	<i>Price</i>
110 VAC	MSVA-110VAC	\$235
230 VAC	MSVA-220VAC	235
24 VAC	MSVA-24VAC	235
12 VDC	MSVA-12VDC	235
24 VDC	MSVA-24VDC	235



HSSA High speed switching accessory

for two position air actuators

The HSSA is an add-on for our standard air actuators, providing increased air or helium flow for the fast actuation required in microbore chromatography or partial loop injections. Normal switching time for a C6W with 100 psi air is 180 ms. With the HSSA that drops to 20 ms; substitute 100 psi helium and the valve switches in 8 ms. Usually the HSSA is used in conjunction with the DVI discussed on page 199.

<i>Prod No</i>	<i>Price</i>
HSSA	\$120



MORE INFORMATION Actuators

Air pages 194-195
 Microelectric 188-191
 Standard elec 193

Controllers and Interfaces

DVSP..... 196
 Digital valve sequence
 programmer
 SVI 197
 Serial valve interface

Mounting Hardware


Closemount
 hardware..... page 208
 Right angle drive 204
 Standoff assembly..... 205
 Standoff mounting
 hardware..... 205

Digital Valve Interface (DVI) and Position Feedbacks

DVI Digital valve interface *for two position air actuators*

We highly recommend the DVI for use with two position air actuators. It sends a two second pulse of air to switch the valve and then vents the air, simulating switching by hand and eliminating the potential for damaging the valve or actuator with continuously-applied pressure. It also features LED position indication, manual and remote operation, and a contact closure output on arrival to the INJECT position, a feature which can be used to start a run or integration. The DVI is available for 110 or 230 VAC.

	<i>Prod No</i>	<i>Price</i>
110 VAC	DVI	\$245
230 VAC	DVI-220	245

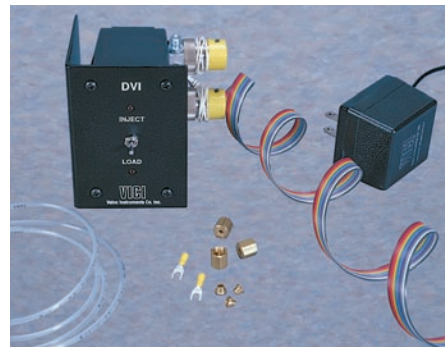

PFAF Position feedback *for two position air actuators*

The optional position feedback (PFAF) can be field installed on any two position standard air actuator. Each position provides a contact closure for TTL logic level signals.

<i>Prod No</i>	<i>Price</i>
PFAF	\$150



Position feedback *for manual valves*

An optional position feedback is available for manual Valco W type and Cheminert C2 and C4 series valves (standard on Cheminert C1 valves). The continuous contact closure, provided only while the valve is in the inject position, can remote start a chromatograph or data system.

<i>Description</i>	<i>Prod No</i>	<i>Price</i>
For Valco W type valves		
4 port	PFW90	\$85
6 port	PFW60	85
8 and 10 port	PFW36	85
For Cheminert valves		
C2 series except 4 port	PFC2	85
C2 series, 4 port	PFC4	85
C4 series	PFC4	85




Purge Housings

Purge housings for Valco valves eliminate any possible diffusion from the atmosphere *into* the valve, or safely vent fugitive emissions *from* the valve. They are typically used in trace level analyses to isolate the valve from ambient air, but can also be used as a safety measure to isolate a valve against leaks into the atmosphere, such as when pyrophoric, toxic, or carcinogenic materials are present in the sample stream.

Two screws secure each half of the purge housing to the valve, so that the rear chamber of the housing (the preload assembly/spring side of the valve) can be removed for rotor inspection or replacement without affecting the actuator side of the housing.

Ideally, the purge housing should be ordered when a new valve is ordered, so that it can be factory-installed. Field installation of purge housings is generally not recommended. To order a new valve with a purge housing, add the suffix "PH" to the product number for the valve/actuator assembly, and add \$200 to the price. The purge housing requires a standoff assembly, which can be 2", 3", 4", or 6" long.

All Valco two position valves with two threaded mounting holes will accommodate a purge housing without modification. Some two position valves must be modified at the factory to accept the housing. The charge for modifying an existing valve includes the new purge housing. Call our service department to make arrangements for this service.

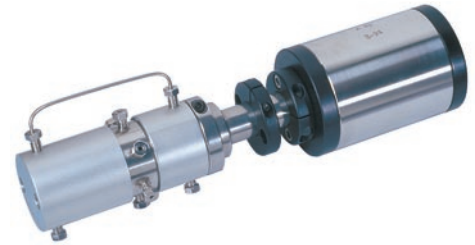

Purge housings

for two position valves and selectors


Description	Prod No	Price	Notes
On a new valve	Add suffix PH to valve prod no	Add \$200 to valve price	Requires standoff assembly. Multiposition valve requires an actuator.
On existing valve, factory installation	Contact factory	\$250	
On existing valve, for field installation	Not recommended		

SPECS

Maximum temperature:
175°C

Note: The purge housing limits the maximum temperature of the purged valve to 175°C, regardless of the valve specifications.

PURGE HOUSING WITH VALVE

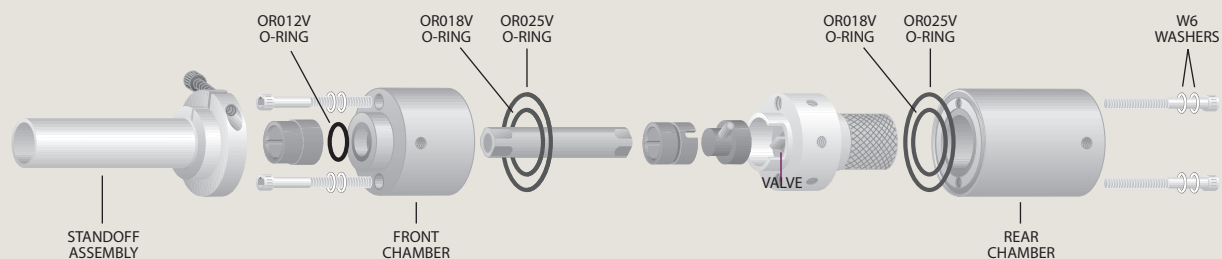

Heated Valve Enclosures

These insulated enclosures allow valves to be operated at temperatures independent of other controlled zones of analytical instruments. The compact construction and minimum power dissipation enable mounting within larger, lower temperature zones without significantly raising the larger oven's minimum temperature or impairing its programmability.

All enclosures include a heater block and a heater cartridge with line cord. The product number chart lists the heater size typically required to heat the valve(s) to the indicated temperature. Holes are provided in the heater block for Perkin Elmer, Agilent, and Varian temperature sensors, with an additional thermocouple hole permitting temperature readout.

Since 1/32" W type valves are smaller, they require a special heater block; enclosures for 1/32" valves are denoted by asterisk (*) in the price chart below.

Note: Heated valve enclosures provide a way to heat valves. A GC's auxiliary temperature zone controller or a device such as our ITC (instrumentation temperature controller) is required to maintain the valves at a set temperature.

Includes insulated enclosure and heater assembly (standard heater block, heater cartridge, line cord). Standard voltage: 110 VAC. For a 230 VAC model, add -220 to the product number. Insulation is 1/2" thick, so internal dimensions are 1" smaller than the exterior size given below.

MORE INFORMATION

ITC page 203
Instrumentation
temperature controller

Heated column
enclosures203
Heater assemblies202
Heater blocks.....202

Heated valve enclosures



for two position valves and selectors

Capacity	Exterior dimensions (Interior approx 1" smaller)	Rating	Prod No	Price
1 valve	4" x 4-1/4" x 3-5/8"d	65W/350°C	HVEA	\$245
		* 65W/350°C	HVEAN	245
	4-1/4" x 5-1/8" x 3-5/8"d	65W/350°C	HVEB	245
		* 65W/350°C	HVEBN	245
	8" x 8" x 6"d	100W/350°C	HVEC	365
2 valves	8" x 5-1/4" x 4"d	125W/350°C	HVE2	300
3 valves	13-1/2" x 5-3/4" x 4"d	150W/350°C	HVE3	365
6 valves	13-3/4" x 8" x 6"d	300W/350°C	HVE6	550

* for use with 1/32" valves

HEATED VALVE ENCLOSURE

For one valve (HVEA)

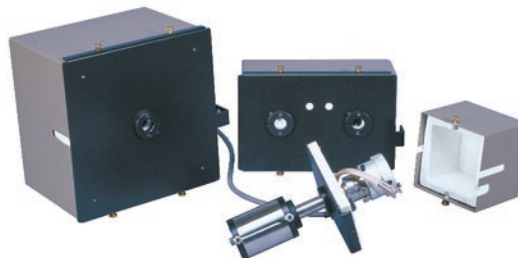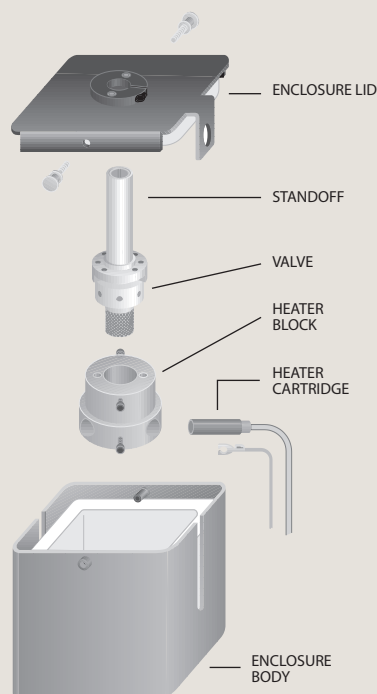


Heated Assemblies and Heater Blocks

Heater assemblies

A heater assembly includes a standard heater block, heater cartridge, and line cord. Heater cartridges are also available individually. Consult the factory for price and availability.

Standard voltage is 110 VAC. For a 230 VAC model, add -220 to the product number.

Description	Rating	Prod No	Price
Heater assembly For use with HVEA or HVEB	65W/350°C	HA1	\$105
For use with HVEC	100W/350°C	HA1T	105
For use with HVE2	125W/350°C	HA2	105
For use with HVE3	150W/350°C	HA3	175
For use with HVE6	300W/350°C	HA6	275



Heater blocks

for single valves

There are two single valve heater block designs: standard and low mass. The low mass heater block, which has a .075" diameter hole for sensor or thermocouple, works well for two position valves. The standard heater block is a high mass, multipurpose design which can be used with any Valco valve. It is designed so that sample loops or short columns can be wound directly on it.

Heater blocks do not include a heater cartridge.

Description	Prod No	Price
Low mass heater block, 1 valve	HBS	\$57
Standard heater block, 1 valve	HB	75
Standard heater block, 1 NW Type valve (1/32" fittings)	HB1N	75



Heater cartridges


for single valve heater blocks

The cartridge size is 1.5" long by 3/8" diameter. Consult the factory to purchase cartridges for larger heater blocks.

Rating	Prod No	Price
65W, 110 VAC	I-21208-32	\$41
65W, 220 VAC	I-21208-33	41
100W, 110 VAC	I-21208-05	46
100W, 220 VAC	I-21208-06	52

MORE INFORMATION
Heated valve
enclosures page 201

Heated Enclosures and Controllers

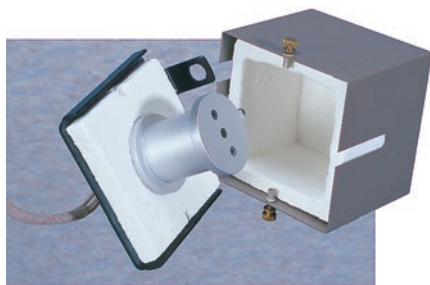

Heated column enclosures

Heated column enclosures allow a column to be operated at temperatures independent of other controlled zones in the instrument. They are similar in construction to our heated valve enclosures (*page 201*), except instead of a valve heater block they contain a column mandrel which will accept 1/8" columns up to 10' long. The HCE2 can have a heated valve installed adjacent to the heated column, with a valve heater block ordered separately.

Includes one column mandrel, insulated enclosure, and heater assembly (standard heater block, heater cartridge, line cord). Standard voltage: 110 VAC. For a 230 VAC model, add -220 to the product number. Insulation is 1/2" thick, so internal dimensions are 1" smaller than the exterior size given below.

Capacity	Exterior dimensions (Interior approx 1" smaller)	Rating	Prod No	Price
Heated column enclosure				
1 column	4" x 4-1/4" x 3-5/8"d	65W/350°C	HCE1	\$245
	4-1/4" x 5-1/8" x 3-5/8"d	65W/350°C	HCEB	245
	8" x 8" x 6"d	65W/350°C	HCEC	365
2 columns	8" x 5-1/4" x 4"d	65W/350°C	HCE2	300
Column mandrel (heater assembly not included with column mandrel)			CM	65



ITC Instrumentation temperature controller

The ITC is an isothermal proportional controller for use in the thermal systems common to analytical instrumentation, and is often used with heated valve enclosures. The desired temperature is set in 1°C increments on the front panel. A thermocouple sensor provides quick recognition of temperature changes. The power to the heater can be attenuated from 0-90% in 10% increments, an easy-to-use feature which improves temperature stability at the set point to 0.5°C. Maximum output current is 10 amps.

The ITC is available with a range of 0°C to 399°C, in 110 VAC or 230 VAC.

		Prod No	Price
0°C to 399°C	110 VAC	ITC10399	\$405
	230 VAC	ITC10399-220	405
Replacement thermocouple		I-21014-01	21

MORE INFORMATION

Heated valve enclosures page 201



Knobs, Handles, and Right Angle Drives

Knobs and handles

for use with a standoff

If you already have a spare standoff assembly (*see facing page*) but lack the knob or retainer, or have an actuated valve on a standoff which you'd like to convert to manual use, here's what you'll need. Includes knob or handle, retainer, and adapter.

	<i>Prod No</i>	<i>Price</i>
Knob for a W type valve	WMMASO	\$25
T-handle for a UW type valve	SOUTH	20

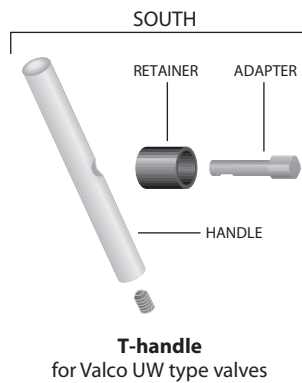

RAD Right angle drive

for two position actuators

Some installations don't allow the valve and actuator to be installed in a typical in-line configuration. The RAD is a 90° gearbox which permits the actuator or handle to be installed at a right angle to the valve. The RAD fits all VICI two position electric and air actuators. Not for use with 1/4" valves.

RAD with standoff includes a 2" standoff; 3", 4", and 6" standoffs are also available.

With closemount hardware		With 2" standoff assembly	
<i>Prod No</i>	<i>Price</i>	<i>Prod No</i>	<i>Price</i>
RAD	\$240	2RAD	\$285



Standoff Assemblies



Valves which will be installed in ovens or heated zones require a standoff assembly, which locates the actuator out of the heated zone and supports both the valve and the handle or actuator. The 5/8" outside diameter standoff tube extends through the oven wall and is secured by means of a clamp ring supplied with the assembly.

If you are converting an actuated valve from a closemount to a standoff application, order the appropriate clamp ring and two screws in addition to the standoff assembly. Consult the factory for availability of non-standard lengths.

The microelectric actuator for selectors uses a special standoff assembly (SOMMP) which is keyed to both valve and actuator. The key guarantees proper alignment and positioning of the valve.

Product numbers show the most common length of standoffs: 4" for air actuators and manual knobs, 2" for microelectric and standard electric actuators. Standoff assemblies are available in lengths of 2", 3", and 6". To order a 6" standoff instead of a 4" one, change the 4 in the product number to a 6.

Standoff assemblies and mounting hardware

for actuators

	Standoff assembly		Clamp ring		Screws	
	Prod No	Price	Prod No	Price	Prod No	Price
Air actuators						
For Valco two position valves with 1 or 2 mounting holes	4SOA	\$45	CR3	\$9	HWSC-SC8-6	\$.50
with no mounting holes	4SOAMP	45	CR3	9	HWSC-SC8-6	.50
For Valco selectors	4SOAMP	45	CR3	9	HWSC-SC8-6	.50
For Cheminert valves	4SOAMP	45	CR3	9	HWSC-SC8-6	.50
Microelectric actuators						
For Valco two position valves with 1 or 2 mounting holes	2SOA	45	CR8	11	HWSC-SC8-8B	.50
with no mounting holes	2SOAMP	45	CR8	11	HWSC-SC8-8B	.50
For Valco multiposition valves (UW and MW Types only)	2SOAMMP	70	CR10	16	HWSC-SC8-8TDH	.50
For Cheminert two position valves	2SOAMP	45	CR8	11	HWSC-SC8-8B	.50
For Cheminert selectors	2SOAMMP	70	CR10	16	HWSC-SC8-8TDH	.50
Standard electric actuators						
For Valco two position valves with 1 or 2 mounting holes	2SOA	45	CR3	9	HWSC-SC8-8B	.50
with no mounting holes	2SOAMP	45	CR3	9	HWSC-SC8-8B	.50
For Valco selectors	2SOAMP	45	CR3	9	HWSC-SC8-8B	.50
For Cheminert valves	2SOAMP	45	CR3	9	HWSC-SC8-8B	.50

MORE INFORMATION

For illustrations of standoffs on valves and actuators, see pages 206-207.

TECH TIP

If you need the **actuator as well as the hardware**, you can order it complete with the appropriate hardware or with the required standoff already installed.

Actuators

Air pages 194-195
Microelectric 188-191
Standard elec 193

CONVERTING FROM CLOSEMOUNT TO A STANDOFF


If you are converting an actuated valve from a closemount to a standoff application, the clamp ring and screws which secure the standoff to the actuator are **not included** in the standoff assembly. Order clamp ring and screws in addition to the standoff assembly.

Standoff assemblies

for manual valves

Includes knob, standoff assembly, retainer, and adapter. For illustration, see page 206, top.


	Prod No	Price
For Valco W and UW Type two position valves rated less than 5,000 psi		
with 1 or 2 mounting holes	4SOWK	\$70
with no mounting holes	4SOWKMP	70
For Valco UW Type two position valves rated 5,000 psi and higher		
with 1 or 2 mounting holes	4SOUTH	65
with no mounting holes	4SOUTHMP	65
For Cheminert valves	4SOWKMP	70

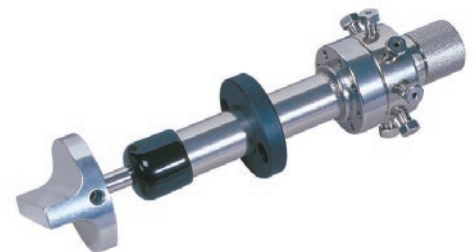

Standoff Assemblies


Standoff with

VALCO TWO POSITION VALVE – MANUAL

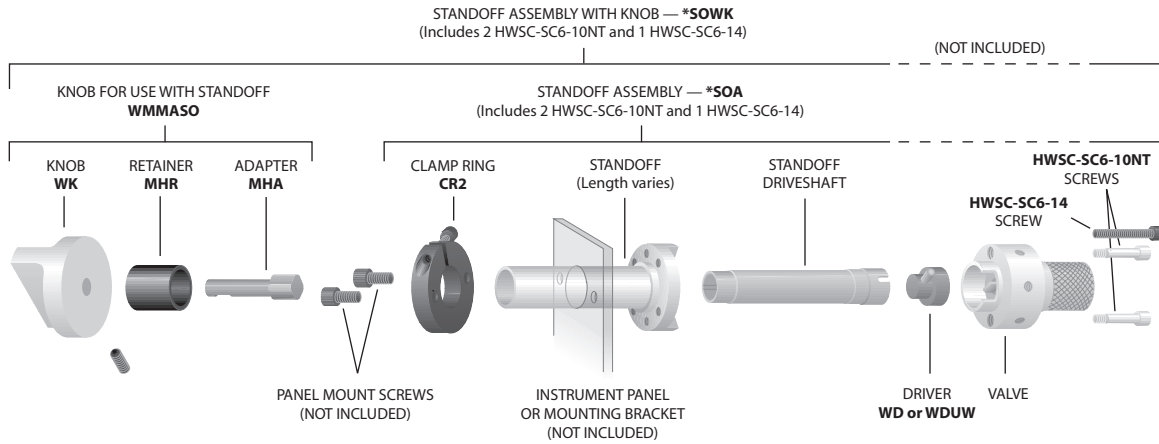


Standoff with

VALCO TWO POSITION VALVE – AIR ACTUATOR

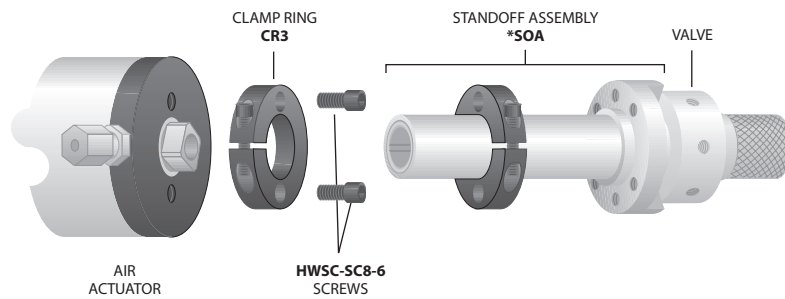


Standoff with

VALCO SELECTOR – AIR ACTUATOR

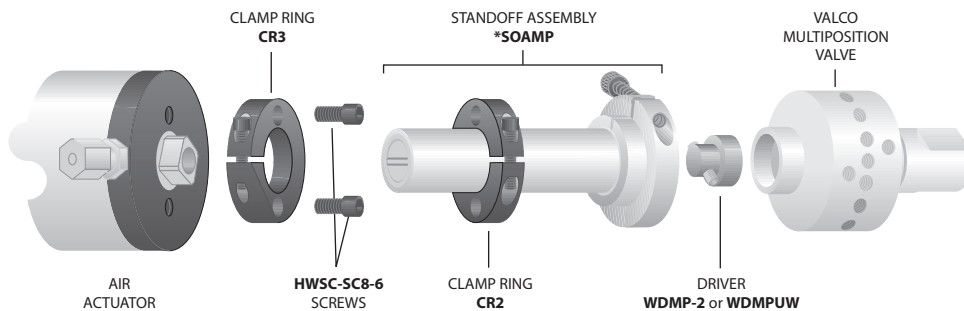


Keyed standoff with

VALCO SELECTOR – MICROELECTRIC ACTUATOR

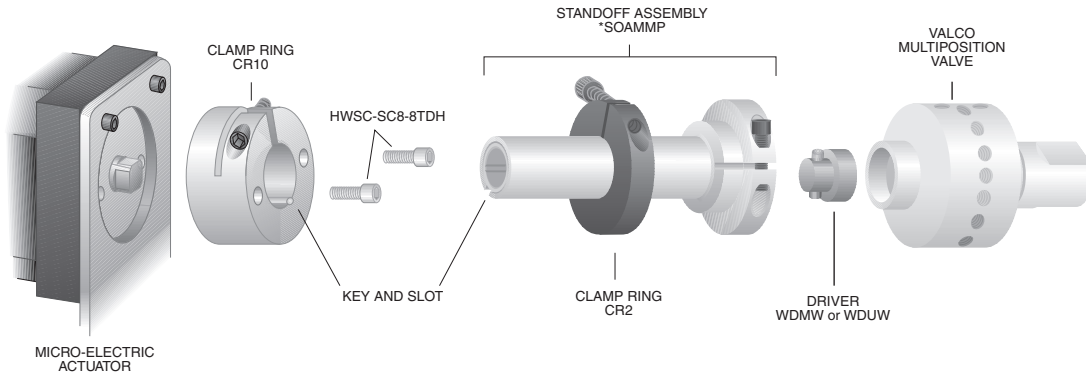


Standoff with

CHEMINERT TWO POSITION VALVE – MANUAL

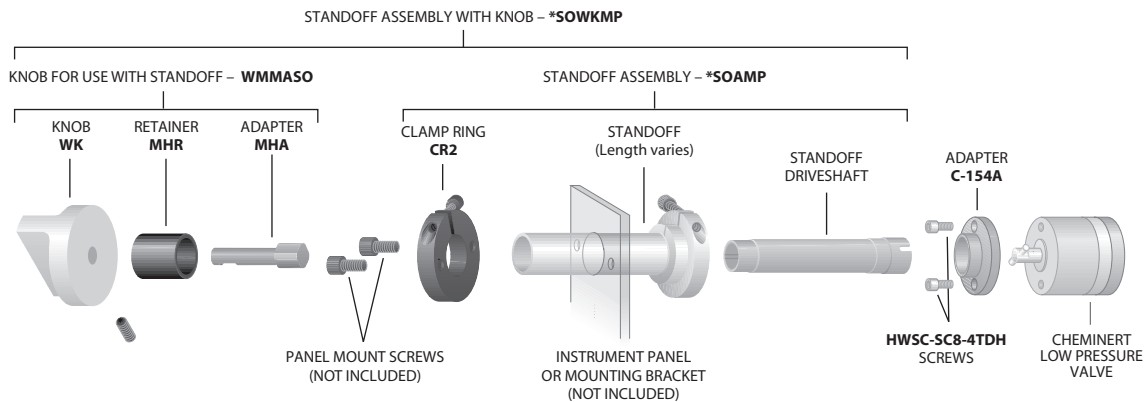

Keyed standoff with

CHEMINERT SELECTOR – MICROELECTRIC ACTUATOR

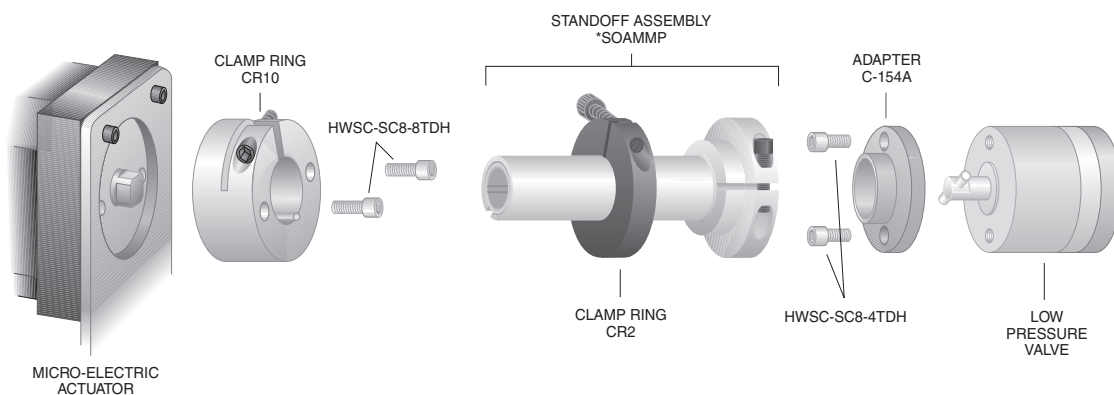

Closemount Hardware

If a valve is not going to be heated beyond the temperature range of the actuator, closemount hardware often makes the cleanest installation.

Closemount hardware

for manual valves

If you have a Valco W Type valve with no hardware and want a knob on it, or if you are converting an air or electrically actuated two position valve to manual use, this is what you need. There are two versions: one for valves with threaded mounting holes and one for valves with unthreaded mounting holes. (If your valve has no mounting holes, you will have to use it with a standoff.)

Description	Prod No	Price
For valves with threaded mounting holes	WMMA	\$35
For valves with unthreaded mounting holes	WMMA10	35



Closemount hardware

for actuators

Order the appropriate closemount hardware if you want to change your valve and actuator from a standoff to a closemount connection. Two mounting screws are included. If air and standard electric actuators require different mounting screws, two of each screw are included with the closemount hardware.

Description	Prod No	Price
Air or standard electric actuators		
For Valco two position valves with 1 or 2 mounting holes	CMH	\$23
For Valco two position valves with no mounting holes	CMHMP	23
For Valco multiposition valves	CMHMP	23
For Cheminert valves high pressure design	CMH11H	22
For Cheminert valves low pressure design (low pressure design includes required adapter)	CMH11L	22



Microelectric actuators		
For Valco two position valves with 1 or 2 mounting holes	CMH12H	22
For Valco two position valves with no mounting holes	CMH12H	22
For Valco multiposition valves (UW and MW Types only)	CMH13	23
For Cheminert two position valves high pressure design	CMH12H	22
For Cheminert two position valves low pressure design (low pressure design includes required adapter)	CMH12L	22
For Cheminert multiposition valves high pressure design	CMH13H	22
For Cheminert multiposition valves low pressure design (low pressure design includes required adapter)	CMH13L	22


TECH TIP

If you need the **actuator as well as the hardware**, you can order it complete with the appropriate hardware or with the required standoff already installed.


Actuators

Air pages 194-195
 Microelectric 188-191
 Standard elec 193


Closemount with VALCO VALVE – MANUAL

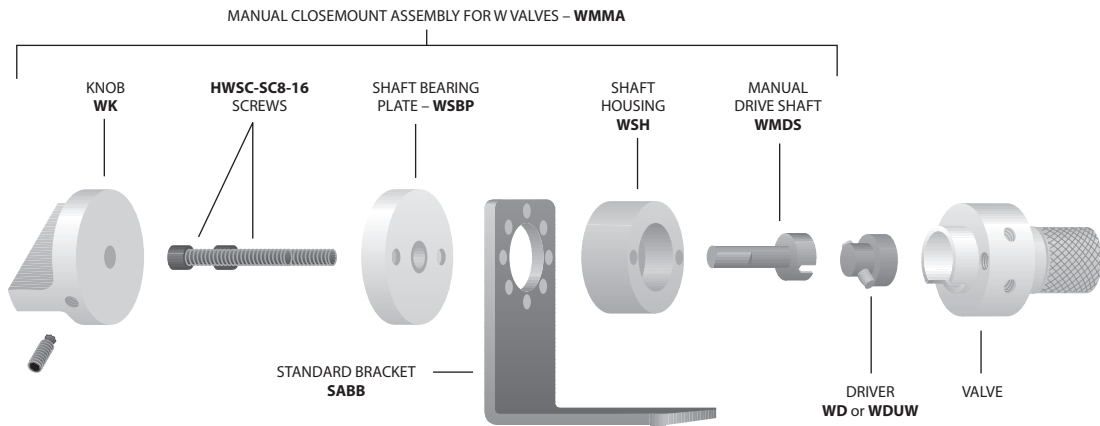

Closemount with CHEMINERT VALVE (Low pressure two position) – MICROELECTRIC

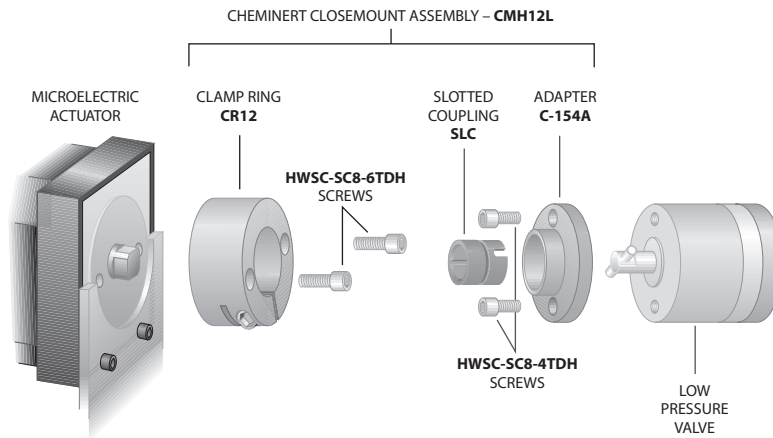

Closemount with VALCO VALVE (1 or 2 mounting holes) – AIR ACTUATOR

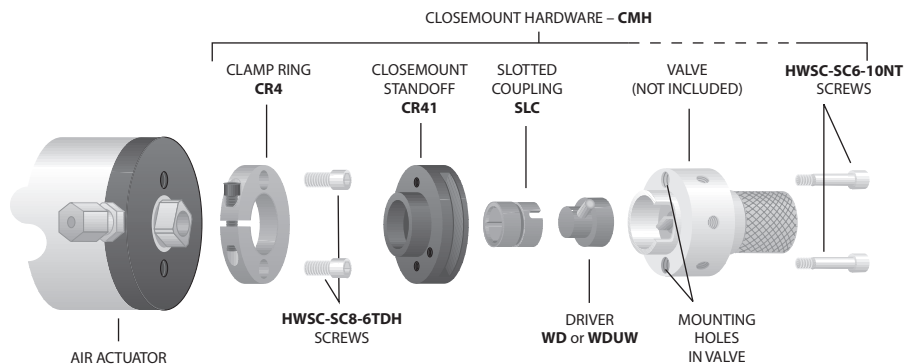

Tools

As a convenience to our customers, we stock several standard tools that are useful for working with valves, fittings, and other products from VICI. In addition, we offer custom tools which are designed and machined in our factory to facilitate use of specific VICI products.

Custom socket wrench

This 1/4" socket wrench with a slot to slip over 1/16" tubing is the perfect tool for installing fittings in some of our multiposition valves, in which the proximity of the ports makes it difficult to get a normal open end wrench in position.

<i>Prod No</i>	<i>Price</i>
SWH4	\$7



Hex key set

The hex key set has a wrench to fit any socket head screw on any VICI valve or actuator. Includes .050", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", and 5/32" sizes.

<i>Prod No</i>	<i>Price</i>
HKS	\$12



Open end wrenches

<i>Size</i>	<i>For use with</i>	<i>Prod No</i>	<i>Price</i>
3/16" x 1/4"	1/32" and 1/16" nuts	OEW	\$6
3/8" x 7/16"	1/8" nuts	OEW-2	12
1/2" x 9/16"	1/4" nuts	OEW-3	12



Pencil magnet

A pencil-type magnet is useful for removing the rotor from Valco valves when the rotor must be replaced or rotated. The process of disassembly and assembly is described in Technical Note 201, which may be requested by phoning or faxing. It may also be found in the support section at www.vici.com.

<i>Prod No</i>	<i>Price</i>
PM	\$5



MORE INFORMATION
Ferrule removal kit. . . . 54

Pin vise and drill index

The drill index has drills sized from 0.0135" to 0.039" (0.34 to 1 mm). These are useful tools when a fused silica tube breaks in a union, or for enlarging the inner diameter of fused silica adapters.


<i>Prod No</i>	<i>Price</i>
PV	\$29



Template

This tool is just what you need when you're working out plumbing and valve switching schematics. It features templates for two position valves with 4, 6, 8, and 10 ports with indications of both positions, as well as various flow symbols. For added convenience, the sides are edged with metric and inch rulers.


<i>Prod No</i>	<i>Price</i>
TEMPLATE1	\$3.50

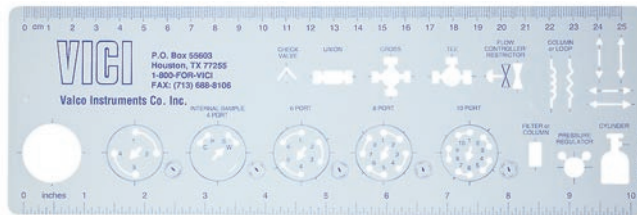

Valve spanner handle

A special tool for gripping a multiposition valve body. It is especially useful during valve alignment procedures.

<i>Prod No</i>	<i>Price</i>
VSH	\$50

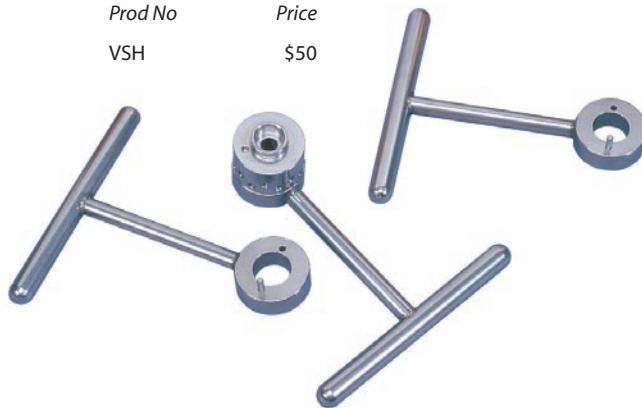



Flow, Pressure, and On/Off Control Devices

This section includes stainless needle valves, our combination on/off needle valves, high pressure prime/purge and on/off valves, and VICI pressure regulators and flow controllers.

Because cast parts can introduce porosity and contamination, every VICI control device is assembled from components which are precision-machined from bar stock. This assures that every item has the same high quality workmanship, with careful assembly and testing to rigid standards.

On/Off and Prime/Purge Valves

Valco high pressure on/off or prime/purge valves feature quality engineering, precision machining, and extremely low internal volume ($< 2 \mu\text{l}$), making them the ideal choice in the most demanding liquid or supercritical fluid chromatography or extraction systems.* The on/off function is self-explanatory; in prime/purge models, mobile phase flows around the needle when the valve is closed, relieving the back pressure from the column. When the valve opens, mobile phase vents to waste to prime the pump.

Standard models provide leak-tight operation up to 10,000 psi (690 bar) at 100°C, with high temperature versions rated up to 6,000 psi/300°C. A 1/16" fitting model with a larger bore and a 1/8" fitting model are available for high flow applications.

The valve needle is made from a special high strength alloy which is resistant even to the buffer salts which might accidentally precipitate inside the valve. Seals are fluorocarbon, with valve bodies machined from HPLC grade stainless steel, ensuring long lifetime in even the most demanding situations.

The on/off and prime/purge valves are available in manual or air/CO₂ actuated versions. The automated valves require a single three-way solenoid: application of 50 psi opens the valve; venting the air allows the spring to return the valve to the closed position.

**Not suitable for use with gases.*



ULTRA-HIGH PRESSURE VALVES


See our new 40,000 psi on/off and prime/purge valves page 85

On/off valves

SPECS				Manual		Manual with 4" standoff		Air actuated with 1" standoff		Air actuated with 4" standoff	
Temp	Pressure	Fitting size	Bore	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Standard temperature											
1/16"	100°C	1/16"	0.50 mm	SFVO	\$165	-	-	ASFVO	\$270	-	-
			0.75 mm	SFVOL	200	-	-	ASFVOL	300	-	-
High temperature / high pressure											
1/16"	300°C	1/16"	0.50 mm	SFVOHT	225	SFVOHT4	\$260	ASFVOHT	320	ASFVOHT4	\$380
			0.75 mm	-	-	-	-	ASFVOLHT	365	ASFVOLHT4	400
		1/8"	1.50 mm	-	-	-	-	ASFVO2HT	380	ASFVO2HT4	440

Prime/purge valves

SPECS				Manual		Air actuated with 1" standoff		Air actuated with 4" standoff	
Temp	Pressure	Fitting size	Bore	Prod No	Price	Prod No	Price	Prod No	Price
Standard temperature									
1/16"	100°C	1/16"	0.50 mm	SFV	\$170	ASFV	\$270	-	-
			0.75 mm	SFVL	200	ASFVL	300	-	-
High temperature / high pressure									
1/16"	300°C	1/16"	0.50 mm	-	-	ASFVHT	320	ASFVHT4	\$380
			0.75 mm	-	-	ASFVLHT	365	ASFVLHT4	400
		1/8"	1.50 mm	-	-	ASFV2HT	380	ASFV2HT4	440

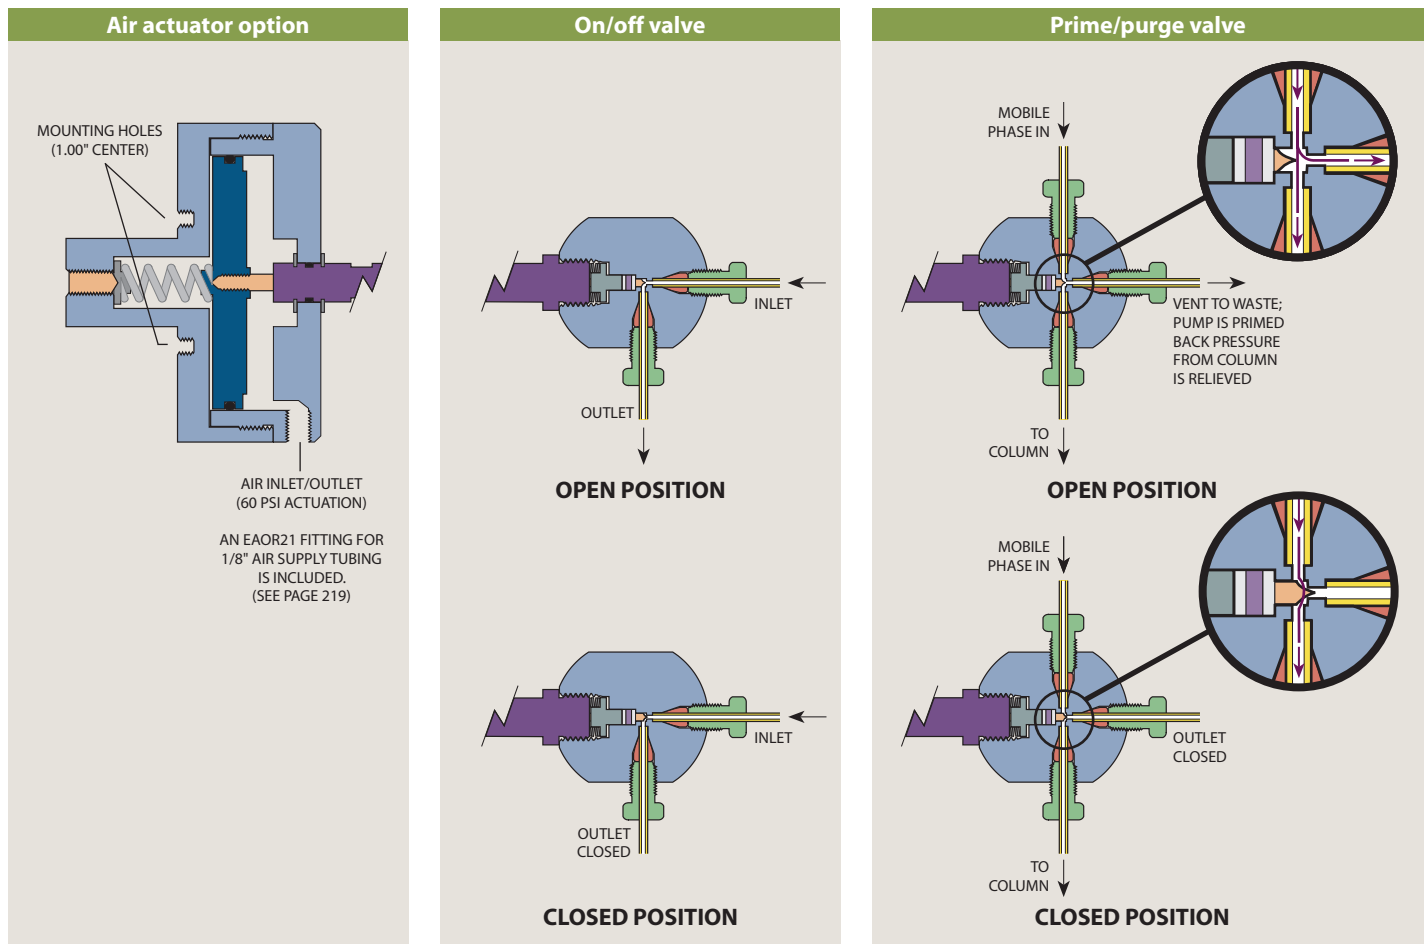

Combo Valves

A new generation needle and shut-off valve provides screwdriver-adjustable control and positive shut-off without damage to the needle. It is ideal for providing hydrogen and air to an FID, since the flow setting is not changed by turning the valve on and off. It can also be used to supply make-up or combustion gas in a wide variety of applications.

The valve body materials are anodized aluminum or stainless steel, with Viton

O-ring seals. Maximum temperature is 100°C, and maximum inlet pressure is 100 psig. The valve can be panel-mounted in an 11/16" or 3/4" hole, using hardware supplied, and all are supplied with Valco 1/16" ZDV fittings. Other configurations are available in OEM quantity upon request.

The standard knob is silver-colored and .62" long. Colored knobs for gas identification are available separately, in two lengths.


Combo valves

Maximum flow @ 40 psi He or N ₂	Aluminum body		Stainless body	
	Prod No	Price	Prod No	Price
10 ml/min	CNV1A10S1	\$85	CNV1S10S1	\$135
50 ml/min	CNV1A50S1	85	CNV1S50S1	135
150 ml/min	CNV1A150S1	85	CNV1S150S1	135
250 ml/min	CNV1A250S1	85	CNV1S250S1	135
500 ml/min	CNV1A500S1	85	CNV1S500S1	135

SPECS

Inlet pressure:
100 psi
Maximum
temperature:
100°C

Optional colored knobs	Standard (.62")		Long (1.25")	
	Prod No	Price	Prod No	Price
Green	CNVEKG	\$6	CNVEKLG	\$8
Red	CNVEKR	6	CNVEKLR	8
Blue	CNVEKU	6	CNVEKLU	8
Silver	CNVEKS	6	CNVEKLS	8
Black	CNVEKB	6	CNVEKLB	8

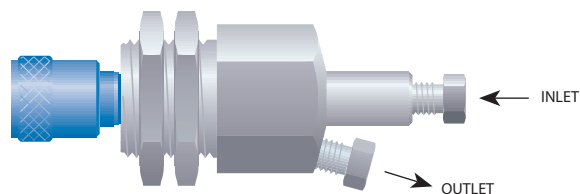

Condyne Combo Valves

Very similar in function to the Valco combo valves, these are the original, hex-bodied combo valves made by the Condyne division of VICI Metronics for nearly 30 years. Condyne products have been transferred to the Valco Houston location, where a number of improvements have been made.


Standard construction features an anodized aluminum body with Viton O-ring seals. Maximum inlet pressure is 100 psi, with a maximum

temperature of 100°C. The valve can be panel mounted through an 11/16" or 3/4" diameter hole. Valco 1/16" fittings are standard, but 1/8" fittings are also available. Nuts and ferrules are included.

Typically, the knob color is used as an indicator of the rated flow, but the standard knob can be changed if desired. A longer version of the knob is also available, as is an all brass valve (in OEM quantities). Consult the factory regarding these options.

Condyne combo valves

SPECS Maximum inlet pressure: 100 psi Maximum temperature: 100°C	Maximum flow @ 40psi He or N2	Knob color	1/16" Valco fittings		1/8" Valco fittings	
			Prod No	Price	Prod No	Price
	10 ml/min	Green	CVA10GS1	\$100	CVA10GS2	\$100
	50 ml/min	Red	CVA50RS1	100	CVA50RS2	100
	150 ml/min	Blue	CVA150US1	100	CVA150US2	100
	500 ml/min	Black	CVA500BS1	100	CVA500BS2	100
	1 liter/min	Yellow	CVA1KYS1	100	CVA1KYS2	100

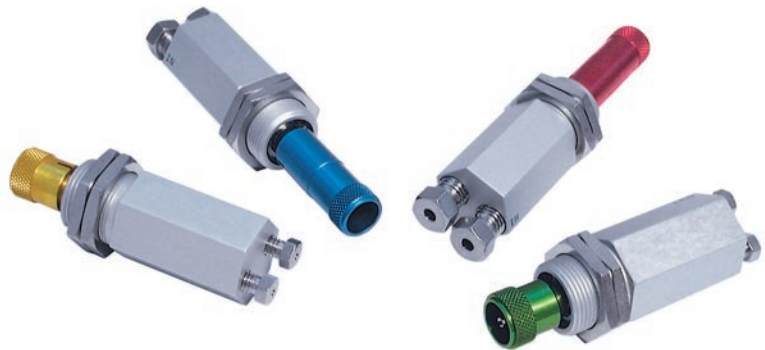

Gas Flow Controllers

Flow controllers provide a stable flow rate under varying pressure. VICI flow controllers are precision machined from aluminum or stainless bar stock to eliminate the contamination often found in die cast parts. Positive flow

shut-off is provided by an integral Viton-sealed adjustment valve.

With all our flow controllers, the inlet pressure must exceed the outlet pressure by 10 psi.

Model 100 gas flow controller

Fixed span upstream referenced flow controller

The Model 100 is available in a variety of preset maximum flow rates, from 150 mL/min to 10 liters/min (N₂ at 40 psi). Any flow controller in this series can be ordered with a 10-turn Spectrol digital dial (3 or 4 digits), to permit a visual indication of the flow setting.

All flow rates listed below are based on N₂ at 40 psi inlet pressure. Maximum inlet pressure is 200 psi.



SPECS

Preset max flow rates:
150 mL/min to 10 liters/min (N₂ at 40 psi).
Maximum inlet pressure:
200 psi
Maximum temperature:
100°C

Standard fittings:
■ 1/8" external tube fittings (EAOR22)

Other fittings are available. Contact the factory for further information.

Flow rate /min	Aluminum body Viton diaphragm		Aluminum body SS diaphragm		SS body Viton diaphragm		SS body SS diaphragm	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
With standard control knob								
0 - 150 mL	FC10AV1K	\$220	FC10AS1K	\$230	FC10SV1K	\$405	FC10SS1K	\$415
0 - 250 mL	FC10AV2K	220	FC10AS2K	230	FC10SV2K	405	FC10SS2K	415
0 - 850 mL	FC10AV3K	220	FC10AS3K	230	FC10SV3K	405	FC10SS3K	415
0 - 1.2 L	FC10AV4K	220	FC10AS4K	230	FC10SV4K	405	FC10SS4K	415
0 - 4.5 L	FC10AV5K	220	FC10AS5K	230	FC10SV5K	405	FC10SS5K	415
0 - 10.0 L	FC10AV6K	220	FC10AS6K	230	FC10SV6K	405	FC10SS6K	415
With Spectrol 3-digit dial								
0 - 150 mL	FC10AV1S3	250	FC10AS1S3	265	FC10SV1S3	435	FC10SS1S3	450
0 - 250 mL	FC10AV2S3	250	FC10AS2S3	265	FC10SV2S3	435	FC10SS2S3	450
0 - 850 mL	FC10AV3S3	250	FC10AS3S3	265	FC10SV3S3	435	FC10SS3S3	450
0 - 1.2 L	FC10AV4S3	250	FC10AS4S3	265	FC10SV4S3	435	FC10SS4S3	450
0 - 4.5 L	FC10AV5S3	250	FC10AS5S3	265	FC10SV5S3	435	FC10SS5S3	450
0 - 10.0 L	FC10AV6S3	250	FC10AS6S3	265	FC10SV6S3	435	FC10SS6S3	450
With Spectrol 4-digit dial								
0 - 150 mL	FC10AV1S4	260	FC10AS1S4	275	FC10SV1S4	450	FC10SS1S4	460
0 - 250 mL	FC10AV2S4	260	FC10AS2S4	275	FC10SV2S4	450	FC10SS2S4	460
0 - 850 mL	FC10AV3S4	260	FC10AS3S4	275	FC10SV3S4	450	FC10SS3S4	460
0 - 1.2 L	FC10AV4S4	260	FC10AS4S4	275	FC10SV4S4	450	FC10SS4S4	460
0 - 4.5 L	FC10AV5S4	260	FC10AS5S4	275	FC10SV5S4	450	FC10SS5S4	460
0 - 10.0 L	FC10AV6S4	260	FC10AS6S4	275	FC10SV6S4	450	FC10SS6S4	460

ALTERNATE FITTING TYPES

Models 100 and 300
The standard is the EAOR22 1/8" external tube fitting. Alternative fitting types are listed below. Order separately.

Internal fitting with O-ring seal	Prod No	Price
1/8" to 5/16-24	ZAOR22	\$14
1/16" to 5/16-24	ZAOR12	14

Model 202

The standard 1/8" NPT female pipe thread with pipe adapters to 1/16" OD tubing included. Another adapter is listed below. Order separately.

1/8" NPT male pipe to Valco internal 1/8"	Prod No	Price
	PZA22	\$14

WHICH KIND OF CONTROLLER?

An **upstream-referenced** controller maintains the flow rate as long as the upstream (inlet) pressure is held constant.

A **downstream-referenced** controller maintains a constant flow under constant downstream (outlet) pressure.

Model 202 gas flow controller

Adjustable span upstream-referenced flow controller

SPECS

Flow range:
infinitely adjustable
Min: 5 mL/min
Max: 1.6 L/min
(N₂ at 40 psi)

Maximum inlet pressure:
200 psi

Maximum temperature:
100°C

Standard fittings:

- 1/8" NPT female pipe threads
- Pipe adapters to 1/16" OD tubing are included.

Other fittings are available. (See facing page.)

The Model 202 provides a user-variable span adjustment permitting it to be used for a variety of flow ranges. After the span is adjusted, the flow controller has a full 10 turns of resolution between the minimum and maximum flow rates. When equipped with a Spectrol digital dial, settings are reproducible to better than 1%.



	Aluminum body Viton diaphragm		Aluminum body SS diaphragm		SS body Viton diaphragm		SS body SS diaphragm	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
With standard control knob	FC22AV1K	\$240	FC22AS1K	\$250	FC22SV1K	\$440	FC22SS1K	\$455
With Spectrol 3-digit dial	FC22AV1S3	275	FC22AS1S3	285	FC22SV1S3	470	FC22SS1S3	485
With Spectrol 4-digit dial	FC22AV1S4	285	FC22AS1S4	300	FC22SV1S4	485	FC22SS1S4	500

Model 300 gas flow controller

Fixed span downstream-referenced flow controller

SPECS

Maximum flow rate:
1.6 L/min
with ambient
downstream pressure

Maximum inlet pressure:
200 psi

Maximum temperature:
100°C

Standard fittings:

- 1/8" external tube fittings (EAOR22)

Other fittings are available. (See facing page.) Contact the factory for further information.

The Model 300 flow controller provides a stable flow rate when upstream pressure conditions vary, providing the downstream pressure remains constant.

All flow rates listed below are based on N₂ at 40 psi inlet pressure. Maximum inlet pressure is 200 psi.



Flow rate /min	Aluminum body Viton diaphragm		Aluminum body SS diaphragm		SS body Viton diaphragm		SS body SS diaphragm	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
With standard control knob								
0 - 200 mL	FC30AV1K	\$220	FC30AS1K	\$230	FC30SV1K	\$405	FC30SS1K	\$415
0 - 300 mL	FC30AV2K	220	FC30AS2K	230	FC30SV2K	405	FC30SS2K	415
0 - 800 mL	FC30AV3K	220	FC30AS3K	230	FC30SV3K	405	FC30SS3K	415
0 - 1.6 L	FC30AV4K	220	FC30AS4K	230	FC30SV4K	405	FC30SS4K	415
With Spectrol 3-digit dial								
0 - 200 mL	FC30AV1S3	250	FC30AS1S3	260	FC30SV1S3	435	FC30SS1S3	450
0 - 300 mL	FC30AV2S3	250	FC30AS2S3	260	FC30SV2S3	435	FC30SS2S3	450
0 - 800 mL	FC30AV3S3	250	FC30AS3S3	260	FC30SV3S3	435	FC30SS3S3	450
0 - 1.6 L	FC30AV4S3	250	FC30AS4S3	260	FC30SV4S3	435	FC30SS4S3	450
With Spectrol 4-digit dial								
0 - 200 mL	FC30AV1S4	260	FC30AS1S4	275	FC30SV1S4	450	FC30SS1S4	460
0 - 300 mL	FC30AV2S4	260	FC30AS2S4	275	FC30SV2S4	450	FC30SS2S4	460
0 - 800 mL	FC30AV3S4	260	FC30AS3S4	275	FC30SV3S4	450	FC30SS3S4	460
0 - 1.6 L	FC30AV4S4	260	FC30AS4S4	275	FC30SV4S4	450	FC30SS4S4	460
With screwdriver adjustable operator								
0 - 750 mL	FC31AV1	220						

MORE INFORMATION

Male pipe adapters
Internal..... page 38
External..... page 39

Micrometering Valves

Micrometering (needle) valves combine the ease of connection associated with Valco zero dead volume fittings with convenient bulkhead mounting. The very low internal volume and precision design make this valve ideal for use as a gas control valve in chromatographic systems.

The Viton® model is rated at 225°C, while a version with Kalrez™ seals is capable of continuous operation at 315°C. This allows a needle valve to be mounted directly within a heated oven, facilitating control of flow

switching in multidimensional systems while keeping the gases at oven temperature.


Valves are rated for maximum of 1000 psi gas. They are individually tested on a mass spectrometer leak detector to a helium leak rate specification of $< 1 \times 10^{-8}$ atm cc/sec.

An unlubricated version with a specially polished seat was designed to be used with our pulsed discharge detectors, and should be used upstream of any ultrapure gas system. There is also a 1/16" tube version.

1/16" micrometering valves

with Valco fittings

Seal	Lubrication	Prod No	Price
Standard: 2–225 ml/min@ 15 psig N ₂ inlet			
Viton	Lubricated	ZBNV1	\$130
Viton	Non-lubricated	ZBNV1-D	155
Kalrez	Non-lubricated	ZBNV1-KZ	180
Fine control: 2–175 ml/min@ 15 psig N ₂ inlet			
Viton	Lubricated	ZBNV1F	145
Viton	Non-lubricated	ZBNV1F-D	175
Kalrez	Non-lubricated	ZBNV1F-KZ	195
Low flow: 2–90 ml/min@ 40 psig N ₂ inlet			
Viton	Lubricated	ZBNV1LF	135
Viton	Non-lubricated	ZBNV1LF-D	160
Kalrez	Non-lubricated	ZBNV1LF-KZ	185

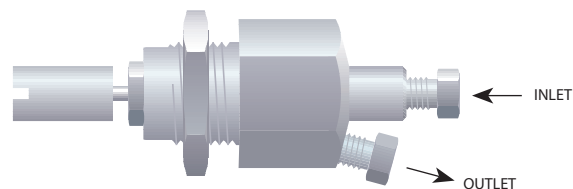

1/16" micrometering valves

with 18" tubes

Seal	Lubrication	Prod No	Price
Standard: 2–225 ml/min@ 15 psig N ₂ inlet			
Viton	Lubricated	BNV1	\$130
Viton	Non-lubricated	BNV1-D	155
Kalrez	Non-lubricated	BNV1-KZ	180
Low flow: 2–90 ml/min@ 40 psig N ₂ inlet			
Viton	Lubricated	BNV1LF	135
Viton	Non-lubricated	BNV1LF-D	160
Kalrez	Non-lubricated	BNV1LF-KZ	185



Combo Pressure Regulators



The Vici combo regulator is a combination regulator and shut-off valve. The pressure is set using the screwdriver adjustment in the center of the on/off knob. Turning the knob counterclockwise provides positive shutoff, while clockwise rotation restores gas pressure to within 0.05 psi of the setpoint.

The regulator is machined from aluminum bar stock and then hard-anodized to provide contamination-free service. It features a stainless steel diaphragm and Viton®-sealed stainless poppet. The compact size (3" x 1.125"

diameter) saves panel space and permits installation anywhere that an 11/16" hole can be located. Mounting hardware is supplied.

Available with outlet pressure ranges of 0-15 psi, 0-30 psi, or 0-60 psi, these regulators can be ordered with 1/16" or 1/8" Valco internal fittings or 1/8" external fittings. Other configurations are available in OEM quantities.

Maximum operating temperature is 100°C, and maximum supply pressure is 250 psig. The influence of supply pressure on outlet pressure is less than 0.1 psi per 10 psi change in supply pressure.

Combo pressure regulators

SPECS

Maximum inlet pressure:

250 psi

Maximum temperature:

100°C

Wetted materials:


- Anodized aluminum
- Stainless steel
- Viton

Pressure range:	Valco internal fittings 1/16"		Valco internal fittings 1/8"		External fittings 1/8"	
	Prod No	Price	Prod No	Price	Prod No	Price
0-15 psi	PR50A15Z1	\$215	PR50A15Z2	\$215	PR50A15E2	\$215
0-30 psi	PR50A30Z1	215	PR50A30Z2	215	PR50A30E2	215
0-60 psi	PR50A60Z1	215	PR50A60Z2	215	PR50A60E2	215

ADAPTERS USED FOR VALCO AND CONDYNE CONTROL DEVICES



Prod No	Price	Used for	Description
ZAOR11	\$14	Diaphragm valve; optional on on/off valves	Valco 1/16" internal to 10-32 female
ZAOR12	14	Optional for Model 100 and 300 flow controllers	Valco 1/16" internal to 5/16-24 O-ring seal
ZAOR22	14	Optional for Model 100 and 300 flow controllers	Valco 1/8" internal to 5/16-24 O-ring seal
EAOR21	14	Air actuated prime/purge and on/off valves	External 1/8" to 10-32 O-ring seal
EAOR22	14	Standard on Model 100 and 300 flow controllers	External 1/8" to 5/16-24 O-ring seal

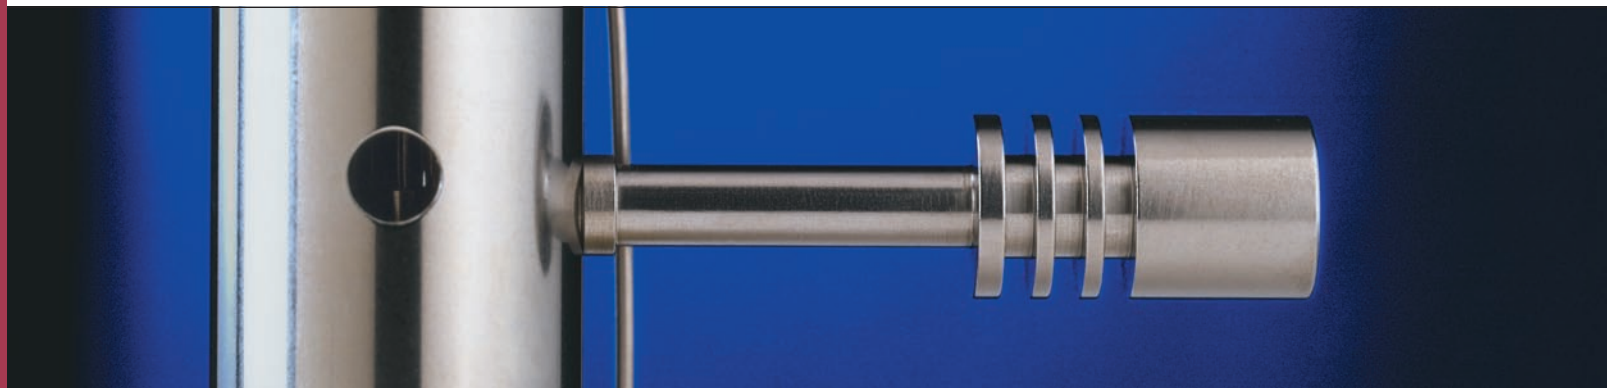

Instrumentation

Most of the components we supply to the instrumentation industry are from our valve and fitting lines. The rest, from our R&D 100 Award-winning pulsed discharge detectors to our application-dedicated trace gas analyzers, are primarily for gas detection and purification.

Pulsed Discharge Detectors

Non-Radioactive, Multiple Mode Electron Capture / Helium Photoionization

VICI PDDs (pulsed discharge detectors) utilize a stable, low powered, pulsed DC discharge in helium as an ionization source. Eluants from the column, flowing counter to the flow of helium from the discharge zone, are ionized by photons from the helium discharge. The bias electrode(s) focus the resulting electrons toward the collector electrode, where they cause changes in the standing current which are quantified as the detector output. Performance is equal to or better than detectors with conventional radioactive sources.

In the electron capture mode, the PDD is a selective detector for monitoring high electron affinity compounds such as freons, chlorinated pesticides, and other halogen compounds. For this type of compound, the minimum detectable quantity (MDQ) is at the femtogram (10^{-15}) or picogram (10^{-12}) level.

In the helium photoionization mode, the PDD is a universal, non-destructive, high sensitivity detector. The response to both inorganic and organic compounds is linear over a wide range. Response to fixed gases is positive (increase in standing current), with an MDQ in the low ppb range.

The PDD in helium photoionization mode is an ideal replacement for FIDs in petrochemical or refinery environments, where the hydrogen and flame can be problematic. In addition, when the discharge gas is doped with argon, krypton, or xenon (depending on the desired cutoff point), the PDD functions as a specific photoionization detector for selective determination of aliphatics, aromatics, amines, and other species.



**R&D 100 AWARD
WINNER**

MORE INFORMATION

Pulsed discharge detectors
Model D-2 page 221
Model D-3 222
Model D-4 223
Model D-5 222

Plug-and-play detectors
for Agilent 6890 222
for Agilent 7890 222
for other GCs 223

Pulsed Discharge Detectors

Model D-2

The D-2 is a dual mode, universal detector system which can be retrofitted to your older GC. The D-2-I is optimized for trace level work in the helium photoionization mode. The stand-alone systems include detector, controller, electrometer, helium purifier, and power supply.




PDD Model D-2

Stand-alone system

Detector system includes detector cell, pulser, controller, electrometer, and helium purifier.

Description	110 VAC		230 VAC	
	Prod No	Price	Prod No	Price
Mode-selectable universal electron capture / photoionization detector system	D-2	\$5500	D-2-220	\$5500
Detectors optimized for trace level work in helium photoionization mode				
Optimized for packed column use	D-2-I	5200	D-2-I-220	5200

Model D-2

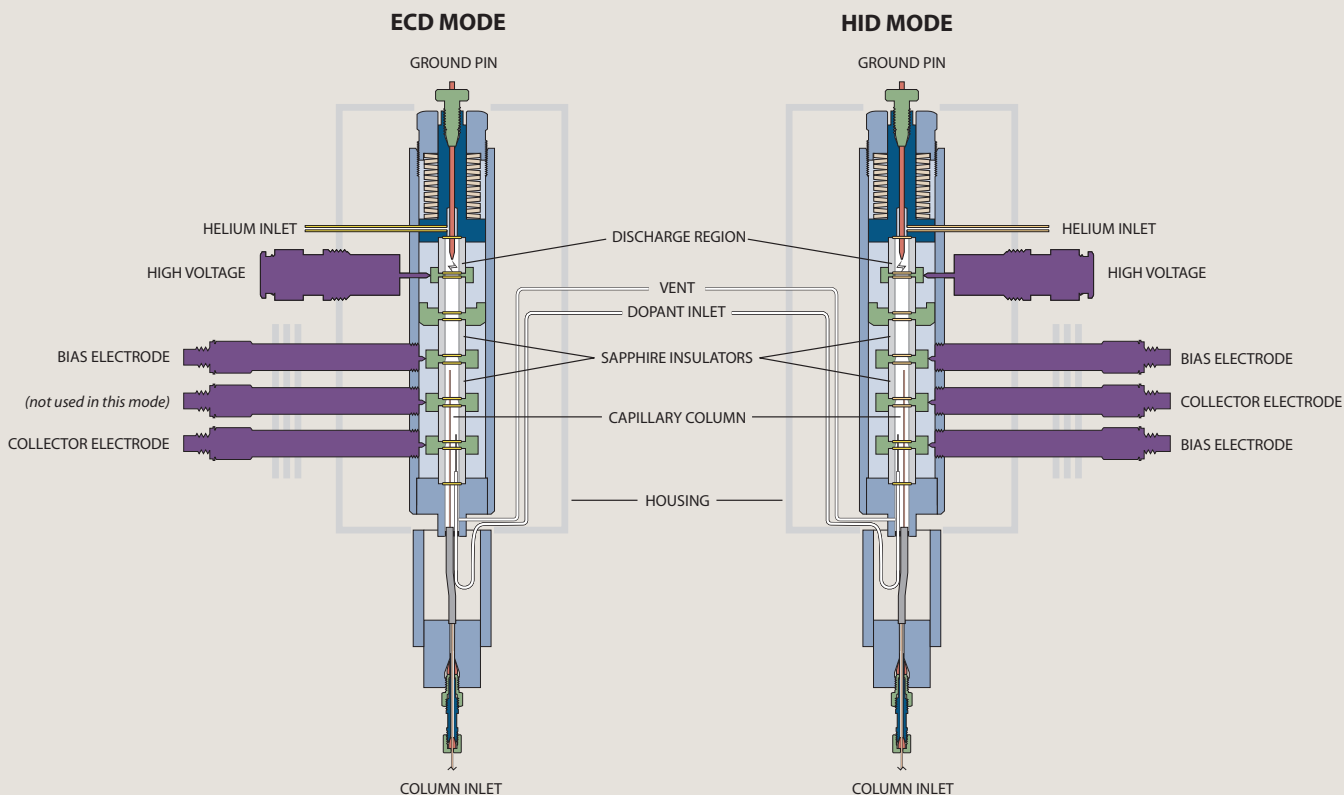

INSTRUMENTATION

Pulsed Discharge Detectors

Plug-and-play detectors for Agilent 6890 and 7890

Model D-3 is designed for plug-and-play installation on the popular Agilent 6890 and 7890, and is optimized for trace level work in the helium photoionization mode

Model D-5 is a plug-and-play electron capture detector for the 6890.

All versions utilize the electronics and power supply of the host GC.



D-3-I-HP plug-in system for Agilent 6890 GC

PDD Model D-3

Helium photoionization

Detector optimized for trace level work in helium photoionization mode

Description	110 VAC		230 VAC	
	Prod No	Price	Prod No	Price
Plug-in system for Agilent 6890	D-3-I-HP	\$6210	D-3-I-HP-220	\$6210
Plug-in system for Agilent 7890	D-3-I-7890	5800	D-3-I-7890-220	5800

PDD Model D-5


Electron capture

Detector optimized for electron capture detection

Description	110 VAC		230 VAC	
	Prod No	Price	Prod No	Price
Plug-in system for Agilent 6890	D-5-6890	\$7000	D-5-6890-220	\$7000


Model D-3 schematic

HELIUM PHOTOIONIZATION

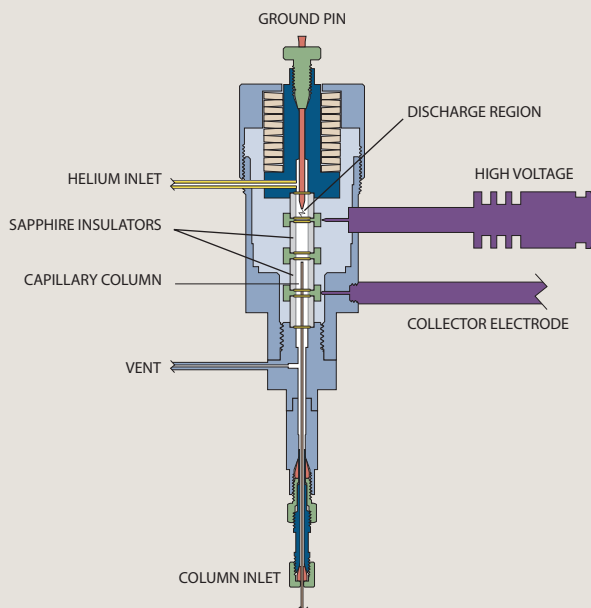

Model D-5 schematic

ELECTRON CAPTURE

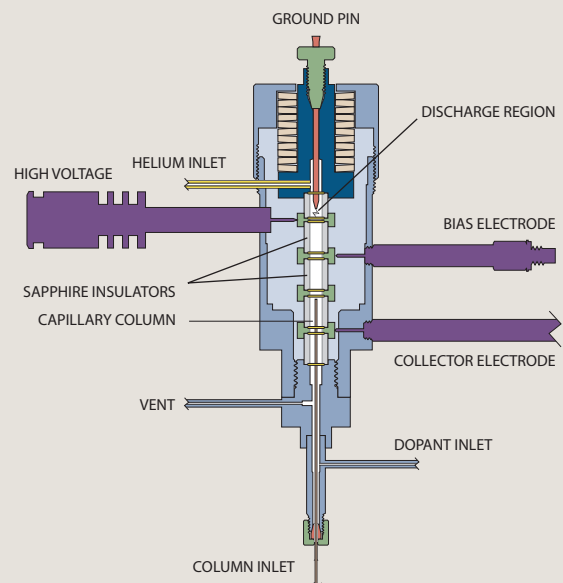

Pulsed Discharge Detectors

Plug-and-play detectors for other GCs

Pulsed Discharge Detector Model D-4 is available in versions for easy installation on most of the GCs in current use, including the Varian 3800; Shimadzu 14, 17, 2010, and 2014;


ThermoFinnigan Trace, Mega, and Top; and Hewlett Packard 5890. The D-4 is single mode, optimized for trace level work in the helium photoionization mode.

PDD Model D-4

Helium photoionization

Detectors optimized for trace level work in helium photoionization mode

Description	110 VAC		230 VAC	
	Prod No	Price	Prod No	Price
Specialized detector for				
HP 5890	D-4-I-HP58	\$5200	D-4-I-HP58-220	\$5200
Shimadzu GC 14 *	D-4-I-SH14-R	3900	D-4-I-SH14-R-220	3900
Shimadzu GC 17, 2010, 2014 *	D-4-I-SH17-R	3900	D-4-I-SH17-R-220	3900
Thermo Trace GC *	D-4-I-TQ-R	3900	D-4-I-TQ-R-220	3900
Varian 3800 *	D-4-I-VA38-R	3900	D-4-I-VA38-R-220	3900
* Uses existing GC FID electrometer.				
For all other GCs	D-4-I	5100	D-4-I-220	5100

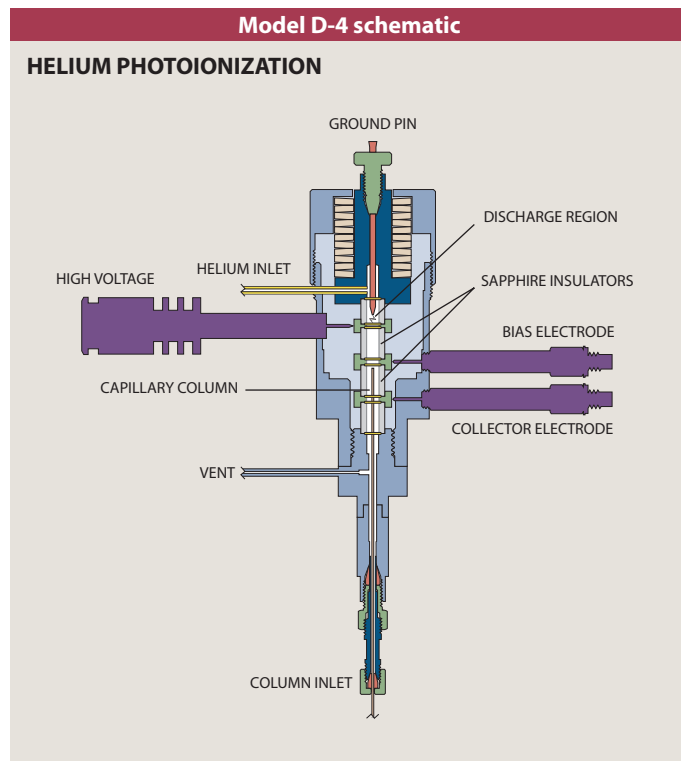


Pulsed Discharge Detector Applications

Model D-2

HERBICIDES IN SOIL SAMPLES USING EPA METHOD 8151

Detector: PDD Model D-2
Mode: Electron capture
Sample: Environmental soil (1 g)
Detector temp: 320°C
Column: ValcoBond VB-5
 30 m x 0.25 mm x 0.25 µm
Column temp: 60°C (2 min),
 20°C/min to 180°C,
 4°C/min to 220°C,
 40°C/min to 300°C (5 min)
Injector temp: 200°C
Sample volume: 2 µL (solvent microextrac-
 tion), 1:15 split
Discharge gas: Helium
Dopant gas: Helium/argon
Attenuation: 1

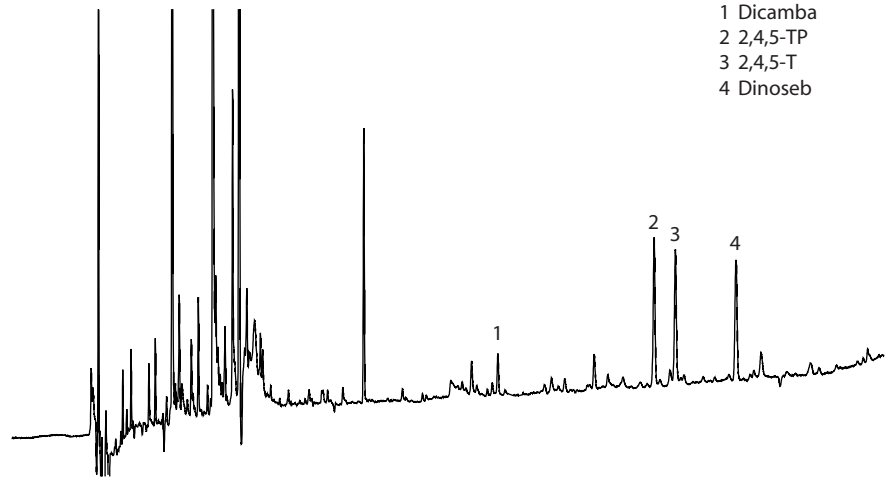


- 1 Dicamba
- 2 2,4,5-TP
- 3 2,4,5-T
- 4 Dinoseb

PDD Model D-2

PAH RESIDUES IN AN ENVIRONMENTAL SOIL SAMPLE SPIKE

Detector: PDD Model D-2
Mode: Helium photoionization
Sample: Environmental soil (1 g)
Detector temp: 300°C
Column: ValcoBond VB-35
 30 m x 0.25 mm x 0.25 µm
Column temp: 120°C for 3 min, 15°C/min
 to 310°C for 15 min
Injector temp: 275°C
Sample volume: 2 µL (solvent microextrac-
 tion), 1:15 split
Discharge gas: Helium
Dopant gas: none
Attenuation: 1

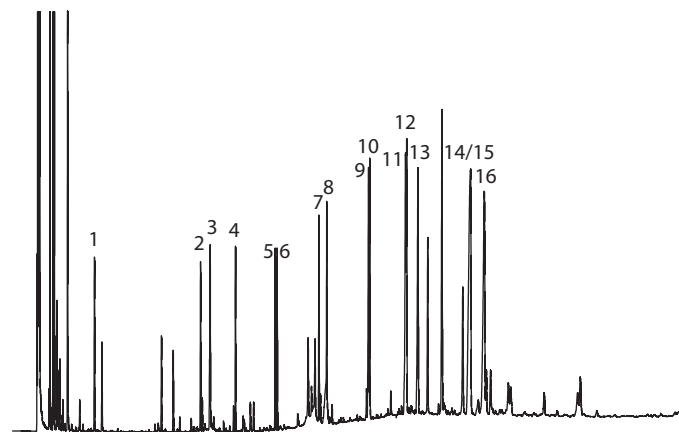


- 1 Naphthalene
- 2 Acenaphthalene
- 3 Acenaphthene
- 4 Fluorene
- 5 Phenanthrene
- 6 Anthracene
- 7 Fluoranthene
- 8 Pyrene
- 9 1,2-Benzanthracene
- 10 Chrysene
- 11 Benzo(b)fluoranthene
- 12 Benzo(k)fluoranthene
- 13 Benzo(a)pyrene
- 14 Indeno(1,2,3-C.d)pyrene
- 15 1,2:5,6-Dibenzanthracene
- 16 1,12-Benzoperylene

PDD Model D-3


AIR

Detector: PDD Model D-3
 Helium photoionization
Detector temp: 300°C
Column: ValcoPLOT VP-Molesieve
 30 m x 0.53 mm x 0.50 µm
Column temp: Ambient
Injector temp: 250°C
Discharge gas: Helium
Carrier gas: Helium

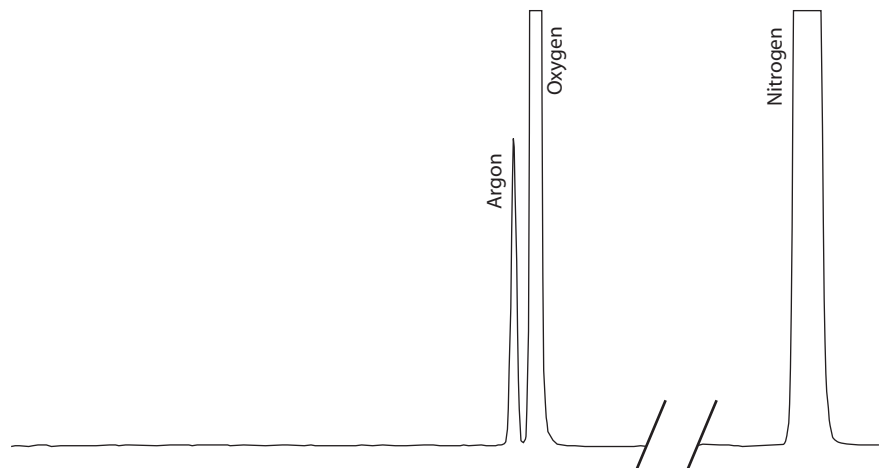

Pulsed Discharge Detector Applications

PDD Model D-3

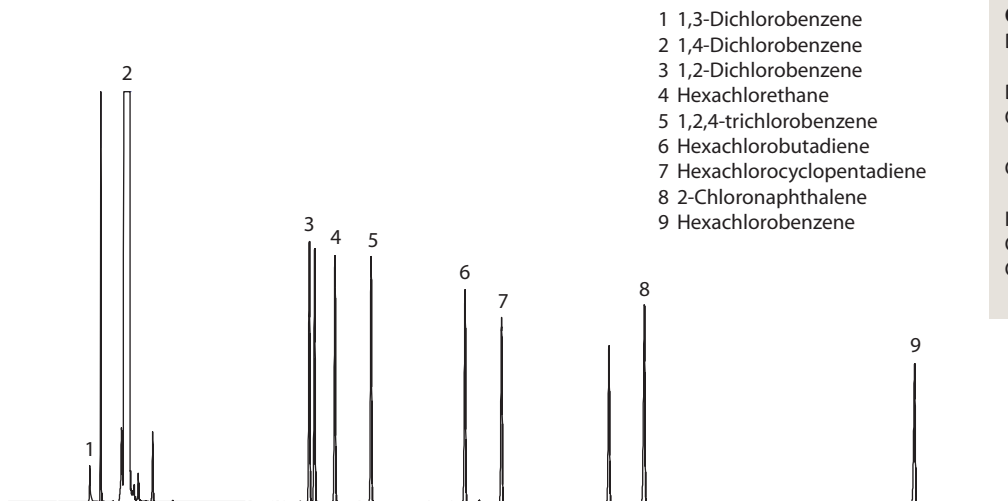


- 1 1,3-Dichlorobenzene
- 2 1,4-Dichlorobenzene
- 3 1,2-Dichlorobenzene
- 4 Hexachlorethane
- 5 1,2,4-trichlorobenzene
- 6 Hexachlorobutadiene
- 7 Hexachlorocyclopentadiene
- 8 2-Chloronaphthalene
- 9 Hexachlorobenzene

CHLORINATED HYDROCARBONS

Detector: PDD Model D-3
Helium photoionization
Detector temp: 280°C
Column: ValcoBond VB-5
30 m x 0.25 mm x .25 µm
Column temp: 60°C initial to
320°C at 10°C/min
Injector temp: 280°C
Carrier gas: Helium
Concentration: 5 mg/ml


PDD Model D-5

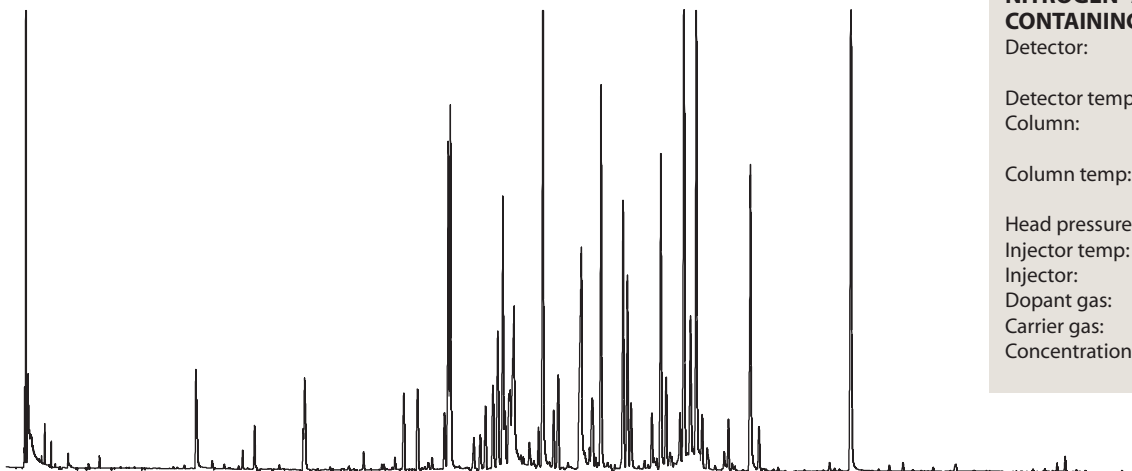

NITROGEN- AND PHOSPHOROUS-CONTAINING PESTICIDES

Detector: PDD Model D-5
Electron capture
Detector temp: 280°C
Column: ValcoBond VB-5
30 m x 0.25 mm x .25 µm
Column temp: 60°C initial to
320°C at 10°C/min
Head pressure: 15 psi
Injector temp: 280°C
Injector: Split 1:10
Dopant gas: 3% Xenon in helium
Carrier gas: Helium
Concentration: 0.8 mg/ml

PDD Model D-3

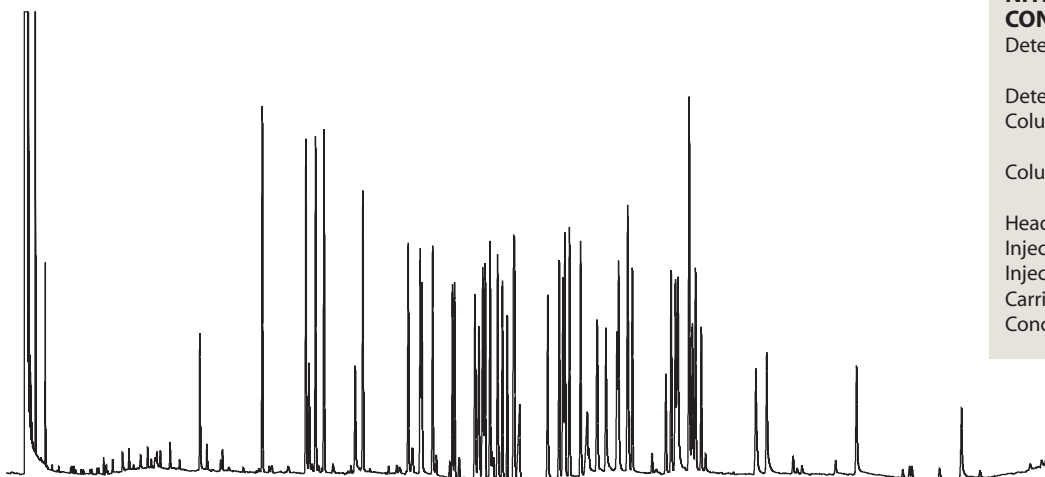

NITROGEN- AND PHOSPHOROUS-CONTAINING PESTICIDES

Detector: PDD Model D-3
Helium photoionization
Detector temp: 280°C
Column: ValcoBond VB-5
30 m x 0.25 mm x .25 µm
Column temp: 60°C initial to
320°C at 10°C/min
Head pressure: 15 psi
Injector temp: 280°C
Injector: Split 1:10
Carrier gas: Helium
Concentration: 2.5 mg/ml

Gas Purifiers

Helium and Nitrogen Purifiers

Carrier gas purity is essential in any application requiring extreme sensitivity. Impurities limit detector sensitivity and can even destroy capillary columns. The Valco HP2 provides "point-of-use" purification of helium or other noble gases, such as Ar, Ne, Kr, and Xe, to sub-ppm levels of reactive gaseous impurities. The NP2 is similar, purifying nitrogen to sub-ppm levels of gaseous impurities.

The purification substrate in Valco gas purifiers is a non-evaporable gettering alloy. This stable alloy is contained in a welded assembly, so the purifiers can be used safely in industrial applications with minimal precautions. The getter is activated by heating, which eliminates the oxide film on the particle surface and allows helium to diffuse into the bulk of the getter particles. The HP2 and NP2 feature a self-regulating design which eliminates the possibility of thermal runaway and maintains the getter material at the optimum temperature.



Standard helium and nitrogen purifiers

Includes universal power supply.

Description	Helium purifier		Nitrogen purifier	
	Prod No	Price	Prod No	Price
110 VAC	HP2	\$915	NP2	\$915
230 VAC	HP2-220	915	NP2-220	915

Replacement getter assembly

Helium	I-23572HP2	460
Nitrogen	I-23572NP2	460

HELIUM PURIFIER

- CE certified
- Gases purified He, Ne, Ar, Kr, Xe, Rn
- Maximum operating pressure 1000 psig
- Impurities removed
Outlet impurities less than 10ppb H₂O, H₂, O₂, N₂, NO, NH₃, CO, CO₂, and CH₄, based on 10ppm total inlet impurities. Other impurities removed include CF₄, CCl₄, SiH₄ and light hydrocarbons.
- Impurities **not** removed He, Ne, Ar, Kr, Xe, Rn

NITROGEN PURIFIER

- CE certified
- Gases purified N₂ only
- Impurities removed
Outlet impurities less than 10ppb H₂O, H₂, O₂, NO, NH₃, CO, CO₂, and CH₄, based on 10ppm total inlet impurities. Other impurities removed include CF₄, CCl₄, SiH₄ and light hydrocarbons.
- Impurities **not** removed He, Ne, Ar, Kr, Xe, Rn, N₂

Gas Purifier and Thermal Conductivity Detector



Miniature Gas Purifiers

The Valco Miniature Helium Purifier (HPM) and Miniature Nitrogen Purifier (NPM) are designed to be installed in a gas chromatograph's flow path immediately upstream of the injector.

The HPM/NPM will remove any contaminants introduced by flow controllers, elastomeric tube seals, pressure regulators, crude traps, or other system components that are not completely clean and leak-tight.

Mini helium and nitrogen purifiers

Includes universal power supply.

Description	Helium purifier		Nitrogen purifier	
	Prod No	Price	Prod No	Price
110 VAC	HPM	\$550	NPM	\$550
230 VAC	HPM-220	550	NPM-220	550



Microvolume Thermal Conductivity Detector

Our dual filament TCD is a stand-alone unit consisting of the detector housing and a controller with electrometer and temperature controls. The detector cell includes two separate nickel/iron filaments, capable of independent or referenced (differential) operation. Cell volume and geometry are optimized for capillary chromatography and enhanced sensitivity at low flow

rates. (Recommended total flow rate: 2-10 mL/min.) Thermal stability is maintained to $\pm 0.02^{\circ}\text{C}$, resulting in a stable, noise-free signal. A single 0-1 millivolt attenuated output for a strip chart recorder is provided through the signal cable at the rear of the controller, with 0-1 volt and 0-10 volt unattenuated signals available through the remote signal cable.

TCD Thermal conductivity detectors

Description	110 VAC		230 VAC	
	Prod No	Price	Prod No	Price
Entire unit (cell and electronics)	TCD2-NIFE	\$3480	TCD2-NIFE-220	\$3480
Cell/oven assembly only Dual filament	TCD2-NIFED	1160	TCD2-NIFED-220	1160
TCD controller only	TCD2-C	2250	TCD2-C-220	2250



Calibration Gas Standards and Calibration Gas Generators from VICI Metronics

VICI Metronics, Inc. in Poulsbo, Washington is the leading manufacturer of devices and instruments that are used in the generation of calibration gas standards, including Dynacal® and G-Cal permeation tubes and Dynacalibrator® and G-Cal calibration gas generators. The product line also includes gas purifiers, contaminant traps, and GC Industries oxygen and toxic gas monitors. Metronics is also the leading provider of explosives, narcotics, and chemical warfare dopants for TSA airport security (ammonia, DCM, and BHT), law enforcement, border patrol, military, and other trace detection industry professionals.

Calibration Gas Standards

The purpose of a calibration gas standard is to establish a reference point for the verification of an analysis. Permeation tube rates can be certified using standards traceable to NIST by the most basic and accurate laboratory procedure – measuring the gravimetric weight loss over a known period of time at a known temperature. Permeation rate data is already established for hundreds of different compounds, and rates for new compounds can be easily certified using NIST-traceable standards.

Advantages

Calibration devices from VICI Metronics offer several advantages over cylinder-supplied gas calibration standards. Multi-component gas mixtures can be easily generated with NIST traceability employing established EPA and ASTM protocols by using the appropriate combination of permeation devices. The technique also allows the removal of a single component from a gas mixture by simply removing the appropriate permeation device.

A wide range of concentrations can easily be generated by simply varying either the dilution flow rate and/or the set point temperature. In addition, their small size and inherent stability allow us to inventory thousands of devices for delivery from stock. Because of the size and the limited quantity of chemical fill, we can offer overnight delivery via air express.


By contrast, bottled trace level (ppb and ppm) standards can be very expensive, and calibrations requiring multiple components over a wide range of concentrations require a large number of gas cylinders, consuming valuable lab space as well. Problems can also arise from degradation of the standard within the cylinder, from changes in cylinder pressure, and from interaction of calibration components and surfaces.

TO ORDER

For prices or more information about specific compounds available in permeation devices, contact VICI Metronics:

Toll-free 877-737-1887
Tel360-697-9199
Fax360-697-6682

vicimetronics.com

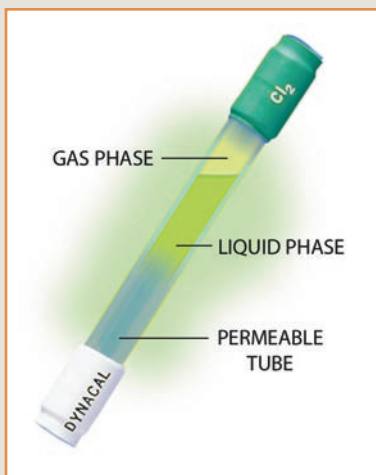

- Ideal for lab environments
- Smaller than G-Cal devices
- More accurate than G-Cal devices
- Require a temperature-controlled environment
- Inexpensive calibration solution

Dynacal permeation devices are small, inert capsules containing a pure chemical compound in a two phase equilibrium between its gas phase and its liquid or solid phase. At a constant temperature, the device emits the compound through its permeable portion at a constant rate. Devices are typically inserted into a carrier

flow to generate test atmospheres for calibrating gas analyzer systems, testing hazardous gas alarms, or conducting long-term studies of effects on materials or biological systems – in short, any situation requiring a stable concentration of a specific trace chemical.

MORE INFORMATION

G-Cal perm tubes...p.232

COMPOUNDS AVAILABLE IN DYNACAL PERM DEVICES

Literally hundreds of compounds are available in our permeation devices. This list is merely representative of the range we offer. Contact us if you don't see what you're looking for.

- Ammonia
- Benzene
- Carbon disulfides
- Carbon tetrachloride
- Chlorine
- Dichloromethane
- Dimethyl sulfide
- Ethanol
- Ethylene oxide
- Freon
- Formaldehyde
- Hydrogen cyanide
- Hydrogen fluoride
- Hydrogen sulfide
- Iodine
- Isopropyl alcohol
- Mercury
- Methanol
- Methyl bromide
- MTBE
- Nitrogen dioxide
- Octane
- Sulfur dioxide
- Sulfur hexafluoride
- Thiophene
- Toluene
- Vinyl acetate
- Water
- Xylenes

Tubular device

The tubular device, a sealed permeable cylinder containing the desired permeant reference material, is the most widely used of the



various permeation devices. Release of the chemical occurs by permeation through the walls of the Teflon® tube for the entire length between the impermeable plugs. A wide range of rates can be achieved by varying the length and thickness of the tube, with typical rates ranging from 5 ng/min to 50,000 ng/min.


Extended life tubular device

Our unique extended life tubular (XLT) device is essentially a standard tubular device coupled to an impermeable stainless steel reservoir. This design offers a range of permeation rates corresponding to a tubular device but has a significantly enhanced lifetime – by a factor of 3 for a 5 cm (active length) device or a factor of 12 for a 1 cm device.



Wafer device

Wafer devices have only a small permeable window, or wafer, so permeation rates are typically lower than rates



for tubular devices. Since permeation occurs only through the polymeric wafer, the permeation rate is controlled by varying the wafer material, the thickness of the wafer, and the diameter of the permeation opening. Gases whose high vapor pressure at normal permeation temperatures prevent their containment in a tubular device can be contained in a wafer device. Wafer devices are available in different styles to allow use in calibrators made by various manufacturers.

Dynacalibrator® Calibration Gas Generators

- Deliver precise concentrations from ppb to high ppm
- Use Dynacal® permeation devices as the trace gas source, with front panel access to the permeation chamber
- Proprietary constant temperature system controls chamber temperature at a set point with $\pm 0.1^\circ\text{C}$ accuracy
- Choice of plumbing and flow configurations

VICI Metronics Dynacalibrators allow you to verify the accuracy of analytical data from air pollution monitoring, industrial hygiene surveys, odor surveys, and other instruments measuring gas concentration. All models enable calibrations traceable to NIST standards for almost any gas analyzer, in the lab or in the field.

The design takes full advantage of all the conveniences inherent in our Dynacal® permeation devices to generate and deliver precise concentrations ranging from ppb to high ppm for hundreds of different compounds. Standard features on all our models, from the most basic Model 150 to the most fully-equipped Model 500, facilitate accurate, reproducible, trouble-free calibrations time after time.

Model 120 Portable Dynacalibrators®

- Completely portable
- Pump powered by rechargeable battery or a 12 VDC source (inverter with cigarette lighter plug provided)
- Available temperature control from 5°C above ambient to 100°C
- Utilizes permeation devices – no bulky cylinders

Standard features on Model 120 include a glass or Teflon® permeation chamber with screw cap access, solid state proportional temperature controller with digital readout of set point and chamber temperature, heater switch with LED indicator, flowmeter and flow control valve, span and overflow outlets, 12 VDC internal pump, activated charcoal scrubber, and molded fiberglass case.



Model 150 Dynacalibrators®

- Temperature control with an accuracy of $\pm 0.01^\circ\text{C}$ from 5°C above ambient to 110°C
- Ultra compact
- PPB to high PPM range

At only 6" wide x 15" deep x 7" high and 10.5 pounds, the Dynacalibrator 150 is a compact calibrator capable of delivering the precise concentrations you require. A passivated glass-coated stainless steel permeation chamber houses the permeation device(s). Carrier and dilution flow rates must be supplied and measured externally. The digital temperature controller maintains the chamber temperature at a set point with an accuracy of $\pm 0.01^\circ\text{C}$, traceable to NIST standards. The wide range of temperature settings (5°C



above ambient to 110°C) means the end user can generate a wide range of volumetric concentrations for both low and high vapor pressure chemical compounds, establishing or changing the desired volumetric concentration by simply varying the carrier flow.

Dynacalibrator® Calibration Gas Generators

Model 230 Dynacalibrators®

With a flexible flow metering system to maintain a constant carrier flow through the permeation chamber, the Model 230 allows the dilution flow to be varied over a wide range, generating the spectrum of concentrations required for checking analyzer linearity. Like all Dynacalibrators, its permeation chamber is big enough to accommodate several permeation devices, for higher output concentrations or multi-component mixtures.



Model 450 Dynacalibrators®

Ordinarily, the plumbing connections between the sample manifold, analyzer, and calibrator must be changed for each calibration. The Model 450's unique "through-port" feature eliminates this chore. The mode control switch selects among standby, zero, span 1 (low concentration), and span 2 (high concentration) modes.



Model 340 Dynacalibrators® (not shown)

The Model 340 adds a front panel mode control switch to select between zero or span calibration modes. In the zero mode, scrubbed air is delivered to the span outlet, allowing the end user to establish zero before sampling.

Model 500 Dynacalibrators® (not shown)

This innovative design features two separate permeation chambers with independent temperature control systems. The chambers can be used independently, or together to combine concentrations of trace components. Separate solenoid valves allow the carrier flows to be switched from the dilution stream to a vent port.

TO ORDER

For prices or more information about specific compounds available in permeation devices, contact VICI Metronics:

Toll-free 877-737-1887
Tel360-697-9199
Fax360-697-6682

vicimetronics.com

G-Cal Permeation Devices


- Excellent for use in the field
- Can be operated at room temperature
- Can handle Arsine and Phosphine
- Longer lifetime than Dynacal devices

Patented* G-Cal permeation tubes offer a proven and repeatable means of generating desired gas or vapor concentrations. The permeant gas escapes through the proprietary membrane system and mixes with a carrier gas (nitrogen is the most common) at a controlled flow rate to obtain a known mixture in ppm or ppb. Applications include calibration of gas monitoring systems and chromatographs, accuracy check of gas detectors, and generation of known test atmospheres for a specific application.

G-Cal devices exhibit the lowest temperature sensitivity among available similar products. The permeation rate through the polymeric membrane used in G-Cal devices changes only 1-3% per degree C, eliminating the need for a temperature-controlled chamber. Most G-Cal devices are guaranteed for 12 months operating life.



Over 100 different substances are available, including Arsine, Phosphine, and gas phase devices such as CO, NO, and Methane. Available permeation rates range from less than 100 ng/min to 50,000 ng/min. Each G-Cal device is individually calibrated and verified to generate a given mass output per unit time (ng/min) at a set point temperature. A graph which shows an estimated permeation rate vs. temperature from 0 to 50°C is included with each device.

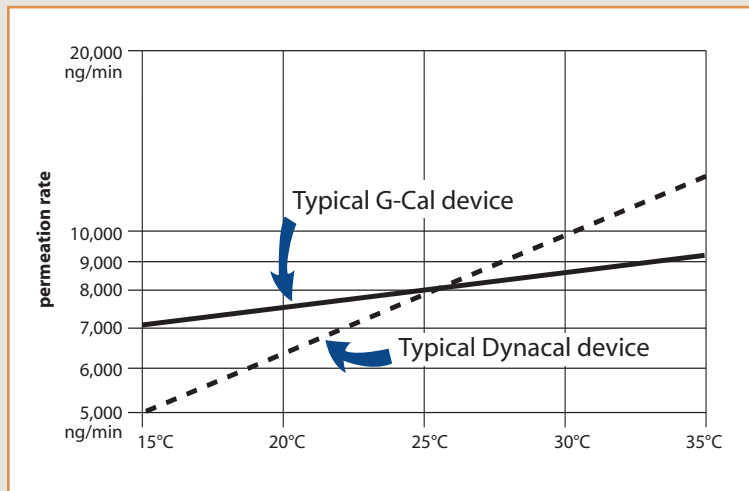

Comparison of G-Cal permeation devices and Dynacal PTFE permeation devices

MORE INFORMATION

Dynacal perm tubes p.229

COMPOUNDS AVAILABLE IN G-CAL PERM TUBES

Literally hundreds of compounds are available in our permeation devices. This list is merely representative of the range we offer. Contact us if you don't see what you're looking for.

- Ammonia
- Arsine *
- Benzene
- Carbon Dioxide *
- Carbon Monoxide *
- Carbonyl Sulfide
- Chloroform
- DMMP
- Dichloromethane
- Dimethyl Sulfide
- Dimethyl Formamide
- Ethyl Chloride
- Ethyl Mercaptan
- Ethylene Oxide
- Formaldehyde
- Freons
- Hydrogen Fluoride
- Hydrogen Sulfide
- Methane *
- Methanol
- Methyl Mercaptan
- Nitric Oxide *
- Nitrogen *
- Nitrogen Dioxide
- Nitrous Oxide *
- Oxygen *
- Phosphine *
- Propylene Oxide
- Sulfur Dioxide
- Sulfur Hexafluoride
- Thiophene
- Toluene
- Vinyl Chloride
- Water
- Xylenes

* Available only in G-Cal permeation devices.

* US Patent No. 4,399,942



- Portable and rugged; ideal for field use
- Ambient temperature from 15°C to 45°C
- Built-in pump
- Carrier gas flow rates from 100-1000 or 200-4000 cc/min
- Models with oven for constant temperature control at cold field sites

G-Calibrators are rugged portable units specifically designed to be used with our patented Series 23 G-Cal permeation devices to generate known concentrations (ppb to ppm) of various gases and liquid vapors. This combination offers the easiest method of calibrating toxic gas detection equipment, gas analyzers, and chromatographs commonly used in chemical, petrochemical, paper, power, and related industries.

Due to its patented permeation technology, the permeation rate of a G-Cal device remains fairly stable when exposed to changing temperatures. For most applications, this feature eliminates the need for the temperature-controlled oven.

Models with an oven have a single fixed temperature point (35° - 50°C). Models powered by a 12 VDC NiCad rechargeable battery also include a 110 VAC external charger. All G-Calibrators have stainless steel fittings and FEP Teflon® tubing throughout.

G-Calibrators

Calibration gas generators


Flow range	Oven	Battery	Prod No.
100-1000 cc/min	no	1.5 VDC	2301
	no	12 VDC NiCad	2310-10
	yes	12 VDC NiCad	2330-10
200-4000 cc/min	no	12 VDC NiCad	2310-20
	yes	12 VDC NiCad	2330-20

TO ORDER

For prices or more information about specific compounds available in permeation devices, contact VICI Metronics:

Toll-free 877-737-1887
 Tel360-697-9199
 Fax360-697-6682

vicimetronics.com

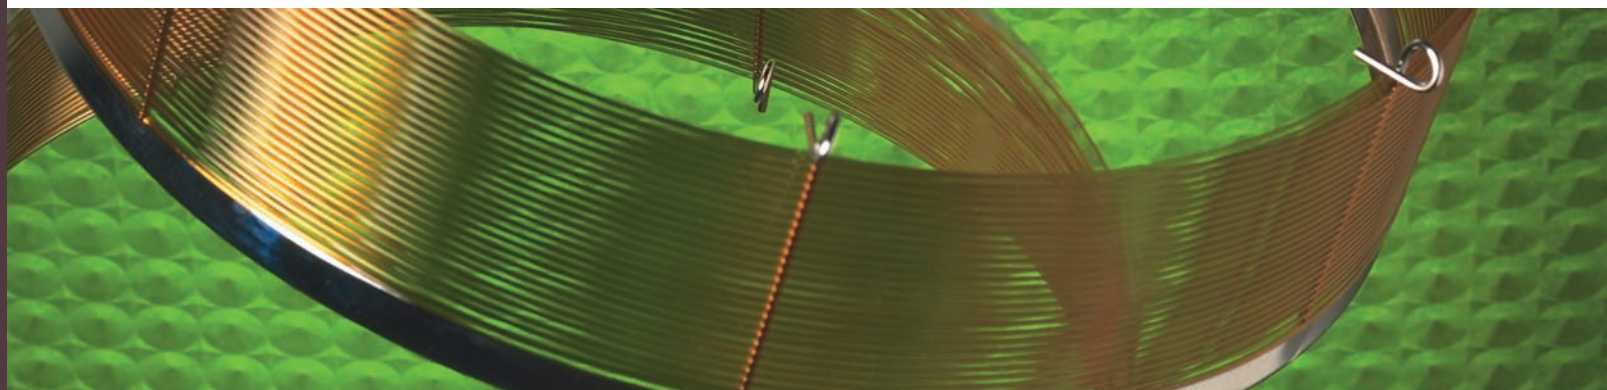

GC Capillary Columns from VICI Metronics

ValcoBond® and ValcoPLOT® capillary columns meet the highest quality standards for resolution, retention characteristics, inertness, bleed, and reproducibility.

ValcoBond® Capillary Columns

- Individually tested
- High temperature range
- Competitive pricing

We use proprietary liquid phase processing to produce low bleed characteristics while maintaining identical retention characteristics to the phases you are used to.

ValcoPLOT® Capillary Columns

- Widest polarity range
- Faster than micropacked
- Water tolerant

Now you can reduce run time by replacing your packed columns with ValcoPLOT HayeSep capillary PLOT columns, with phases available only from VICI. Our proprietary phase processing produces the first capillary PLOT columns with characteristics identical to HayeSep packed columns.

VALCOBOND PHASES

pages 235 - 238

VB-FLUORO	NEW! Bonded fluorosilicone phase
VB-1	100% dimethylpolysiloxane
VB-5	(5%-Phenyl)-methylpolysiloxane
VB-35	(35%-Phenyl)-methylpolysiloxane
VB-50/608	(50%-Phenyl)-methylpolysiloxane
VB-624	(6% Cyanopropyl-phenyl)-methylpolysiloxane
VB-1701	(14% Cyanopropyl-phenyl)-methylpolysiloxane
VB-Wax	Polyethylene glycol (PEG)



VALCO PLOT PHASES

pages 240 - 244

ValcoPLOT Molesieve 5Å	ValcoPLOT A High purity Divinylbenzene/ethyleneglycoldimethacrylate
ValcoPLOT Metal Molesieve 5Å	ValcoPLOT B Divinylbenzene/polyethyleneimine
ValcoPLOT Alumina KCl	ValcoPLOT C Divinylbenzene/acrylonitrile
ValcoPLOT Alumina Na₂So₄	ValcoPLOT D High purity Divinylbenzene
	ValcoPLOT N Divinylbenzene/ethyleneglycoldimethacrylate
	ValcoPLOT P Divinylbenzene/styrene
	ValcoPLOT Q Divinylbenzene
	ValcoPLOT R Divinylbenzene/N-vinyl-2-pyrrolidinone
	ValcoPLOT S Divinylbenzene/4-vinyl-pyridine

PRODUCTS FOR GC

Other useful products for gas chromatography include:

1/32" ultra low mass external unions . . .	p. 19
FS adapter ferrules	16,17
GC detectors . . .	222-225
GC injection valves	102-111
GC stream selectors	122-131
Gas purifiers	227
Helium and nitrogen purifiers	226
Inlet discs (injector nuts for HP 6890 and 5890 . . .	19
Reduced breakdown injection port liners	245

TO ORDER

For prices or more information about your specific application, contact VICI Metronics:

Toll-free 877-737-1887
Tel 360-697-9199
Fax 360-697-6682

columns@vici.com

PRIMARY APPLICATIONS

Aldehydes
CFCs
Explosives
Ketones
PAHs
Silanes
Unsaturated compounds

VB-Fluoro Capillary Columns **NEW**

- 100% bonded Fluorosilicone
- High thermal stability
- Unique selectivity

VB-Fluoro capillary columns feature unique selectivity created by high fluorine affinity to analyte lone pair electrons. This is coupled with thermal stability similar to low polarity phases such VB-1 and VB-5.

Low bleed characteristics make VB-Fluoro columns well suited for MS and ECD applications, and the high thermal stability allows their use as a complementary column for most high temperature applications

which commonly utilize low polarity stationary phases.

Primary applications include ketones, aldehydes, explosives, PAHs, silanes, CFCs, and unsaturated compounds.

VB-Fluoro columns are a good replacement for Rtx-200, DB-200, DB-210, and VF-200 columns.

VB-Fluoro

0.25 mm ID	df	Prod No
30 meters	0.25	CFS-N03025-025
0.53 mm ID		
30 meters	1.00	CFS-N03053-100


VB-Fluoro



ACRYLATE IMPURITIES

Column: VB-Fluoro
30 m x .53 mm x 1.00 μ m
Column temp: 40°C for 5 min,
to 200°C @ 10°C/min
Carrier: Hydrogen at 35 cm/sec
Injector: Split 100:1
Detector: FID

VB-Fluoro

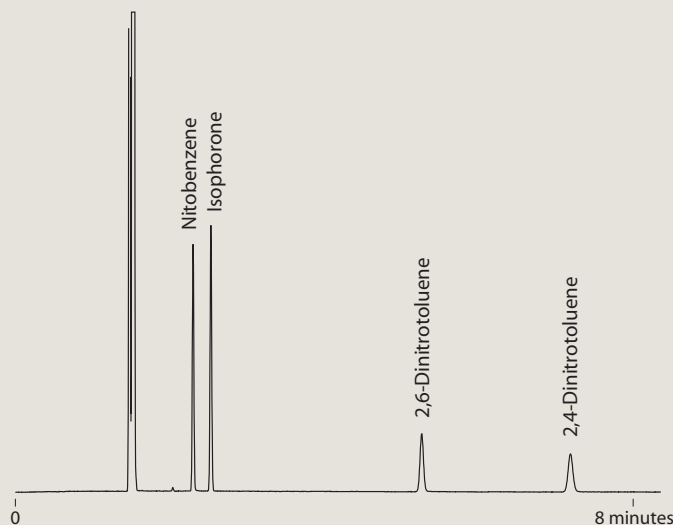

EXPLOSIVES

Column: VB-Fluoro
30 m x .53 mm x 1.00 μ m
Column temp: Isothermal 200°C
Carrier: Hydrogen at 35 cm/sec
Injector: Split 100:1
Detector: FID

GC CAPILLARY COLUMNS from VICI Metronics

ValcoBond Columns

VB-1

100% dimethylpolysiloxane

REPLACES

DB-1, DB-1ms, HP-1, HP-1MS, Ultra-1, Rtx-1, Rtx-1MS, SPB-1, MDN-1, BP-1, CP-Sil 5 CB, GB-1, 007-1, OV-1, SE-30, AT-1 and ZB-1

0.10 mm ID	df	Prod No
10 meters	0.10	CFS-A01010-010B
10 meters	0.20	CFS-A01010-020B
10 meters	0.40	CFS-A01010-040B
20 meters	0.10	CFS-A02010-010B
20 meters	0.20	CFS-A02010-020B
20 meters	0.40	CFS-A02010-040B
0.18 mm ID	df	Prod No
10 meters	0.10	CFS-A01018-010B
10 meters	0.18	CFS-A01018-018B
10 meters	0.40	CFS-A01018-040B
30 meters	0.10	CFS-A03018-010B
30 meters	0.18	CFS-A03018-018B
30 meters	0.40	CFS-A03018-040B
30 meters	1.00	CFS-A03018-100B
40 meters	0.18	CFS-A04018-018B
40 meters	0.40	CFS-A04018-040B
0.25 mm ID	df	Prod No
15 meters	0.10	CFS-A01525-010B
15 meters	0.25	CFS-A01525-025B
15 meters	0.50	CFS-A01525-050B
15 meters	1.00	CFS-A01525-100B
15 meters	1.50	CFS-A01525-150B
30 meters	0.10	CFS-A03025-010B
30 meters	0.25	CFS-A03025-025B
30 meters	0.50	CFS-A03025-050B
30 meters	1.00	CFS-A03025-100B
30 meters	1.50	CFS-A03025-150B
60 meters	0.10	CFS-A06025-010B
60 meters	0.25	CFS-A06025-025B
60 meters	0.50	CFS-A06025-050B
60 meters	1.00	CFS-A06025-100B
60 meters	1.50	CFS-A06025-150B
0.32 mm ID	df	Prod No
15 meters	0.10	CFS-A01532-010B
15 meters	0.25	CFS-A01532-025B
15 meters	0.32	CFS-A01532-032B
15 meters	0.50	CFS-A01532-050B
15 meters	1.00	CFS-A01532-100B

0.32 mm ID, cont'd	df	Prod No
15 meters	2.00	CFS-A01532-200B
15 meters	3.00	CFS-A01532-300B
15 meters	4.00	CFS-A01532-400B
15 meters	5.00	CFS-A01532-500B
30 meters	0.10	CFS-A03032-010B
30 meters	0.25	CFS-A03032-025B
30 meters	0.32	CFS-A03032-032B
30 meters	0.50	CFS-A03032-050B
30 meters	1.00	CFS-A03032-100B
30 meters	2.00	CFS-A03032-200B
30 meters	3.00	CFS-A03032-300B
30 meters	4.00	CFS-A03032-400B
30 meters	5.00	CFS-A03032-500B
60 meters	0.10	CFS-A06032-010B
60 meters	0.25	CFS-A06032-025B
60 meters	0.32	CFS-A06032-032B
60 meters	0.50	CFS-A06032-050B
60 meters	1.00	CFS-A06032-100B
60 meters	2.00	CFS-A06032-200B
60 meters	3.00	CFS-A06032-300B
60 meters	4.00	CFS-A06032-400B
60 meters	5.00	CFS-A06032-500B
0.53 mm ID	df	Prod No
15 meters	0.15	CFS-A01553-015B
15 meters	0.50	CFS-A01553-050B
15 meters	1.00	CFS-A01553-100B
15 meters	1.50	CFS-A01553-150B
15 meters	3.00	CFS-A01553-300B
15 meters	5.00	CFS-A01553-500B
30 meters	0.15	CFS-A03053-015B
30 meters	0.50	CFS-A03053-050B
30 meters	1.00	CFS-A03053-100B
30 meters	1.50	CFS-A03053-150B
30 meters	3.00	CFS-A03053-300B
30 meters	5.00	CFS-A03053-500B
60 meters	1.00	CFS-A06053-100B
60 meters	1.50	CFS-A06053-150B
60 meters	3.00	CFS-A06053-300B
60 meters	5.00	CFS-A06053-500B

PRIMARY APPLICATIONS

Amines
Flavors
Fragrances
Hydrocarbons
Pesticides
PCBs
Phenols
Sulfur compounds
EPA Methods
504, 551, 1618
NIOSH Methods
1300-1301,
1400-1403,
1450, 1501, 2005

VB-35

(35%Phenyl)-methylpolysiloxane

REPLACES

DB-35, AT-35, MDN-35, DB-35ms, Rtx-35, BP-35, HP-35, Rtx-35MS, 007-11, HP-35MS, Sup-Herb, ZB-35

0.25 mm ID	df	Prod No
15 meters	0.25	CFS-C01525-025B
15 meters	0.50	CFS-C01525-050B
30 meters	0.25	CFS-C03025-025B
30 meters	0.50	CFS-C03025-050B
60 meters	0.25	CFS-C06025-025B
60 meters	0.50	CFS-C06025-050B
0.32 mm ID	df	Prod No
15 meters	0.25	CFS-C01532-025B
15 meters	0.50	CFS-C01532-050B
30 meters	0.25	CFS-C03032-025B
30 meters	0.50	CFS-C03032-050B

0.32 mm ID, cont'd	df	Prod No
60 meters	0.25	CFS-C06032-025B
60 meters	0.50	CFS-C06032-050B
0.53 mm ID	df	Prod No
15 meters	0.50	CFS-C01553-050B
15 meters	1.00	CFS-C01553-100B
30 meters	0.50	CFS-C03053-050B
30 meters	1.00	CFS-C03053-100B
60 meters	0.50	CFS-C06053-050B
60 meters	1.00	CFS-C06053-100B

PRIMARY APPLICATIONS

Drugs
Pesticides
Herbicides
PAHs
Pharmaceuticals
PCBs
EPA Method 8081A
(organochlorine pesticides)

VB-5

(5% Phenyl)-methylpolysiloxane

PRIMARY APPLICATIONS

Drugs
Herbicides
Hydrocarbons
PCBs
Pesticides
Phenols
Semi-volatiles
Sulfur compounds

0.10 mm ID	df	Prod No
10 meters	0.10	CFS-B01010-010B
10 meters	0.20	CFS-B01010-020B
20 meters	0.10	CFS-B02010-010B
20 meters	0.20	CFS-B02010-020B

0.18 mm ID	df	Prod No
10 meters	0.18	CFS-B01018-018B
10 meters	0.40	CFS-B01018-040B
20 meters	0.18	CFS-B02018-018B
20 meters	0.40	CFS-B02018-040B
30 meters	0.18	CFS-B03018-018B
30 meters	0.40	CFS-B03018-040B
40 meters	0.18	CFS-B04018-018B
40 meters	0.40	CFS-B04018-040B

0.25 mm ID	df	Prod No
15 meters	0.10	CFS-B01525-010B
15 meters	0.25	CFS-B01525-025B
15 meters	0.50	CFS-B01525-050B
15 meters	1.00	CFS-B01525-100B
30 meters	0.10	CFS-B03025-010B
30 meters	0.25	CFS-B03025-025B
30 meters	0.50	CFS-B03025-050B
30 meters	1.00	CFS-B03025-100B
60 meters	0.10	CFS-B06025-010B
60 meters	0.25	CFS-B06025-025B
60 meters	0.50	CFS-B06025-050B
60 meters	1.00	CFS-B06025-100B

0.32 mm ID	df	Prod No
15 meters	0.10	CFS-B01532-010B
15 meters	0.25	CFS-B01532-025B
15 meters	0.50	CFS-B01532-050B
15 meters	1.00	CFS-B01532-100B
15 meters	2.00	CFS-B01532-200B
15 meters	3.00	CFS-B01532-300B
15 meters	5.00	CFS-B01532-500B

0.32 mm ID, cont'd	df	Prod No
30 meters	0.10	CFS-B03032-010B
30 meters	0.25	CFS-B03032-025B
30 meters	0.50	CFS-B03032-050B
30 meters	1.00	CFS-B03032-100B
30 meters	2.00	CFS-B03032-200B
30 meters	3.00	CFS-B03032-300B
30 meters	5.00	CFS-B03032-500B
60 meters	0.10	CFS-B06032-010B
60 meters	0.25	CFS-B06032-025B
60 meters	0.50	CFS-B06032-050B
60 meters	1.00	CFS-B06032-100B
60 meters	2.00	CFS-B06032-200B
60 meters	3.00	CFS-B06032-300B
60 meters	5.00	CFS-B06032-500B

0.53 mm ID	df	Prod No
15 meters	0.50	CFS-B01553-050B
15 meters	1.00	CFS-B01553-100B
15 meters	1.50	CFS-B01553-150B
15 meters	2.00	CFS-B01553-200B
15 meters	2.65	CFS-B01553-265B
15 meters	3.00	CFS-B01553-300B
15 meters	5.00	CFS-B01553-500B
30 meters	0.50	CFS-B03053-050B
30 meters	1.00	CFS-B03053-100B
30 meters	1.50	CFS-B03053-150B
30 meters	2.65	CFS-B03053-265B
30 meters	3.00	CFS-B03053-300B
30 meters	5.00	CFS-B03053-500B
60 meters	1.00	CFS-B06053-100B
60 meters	1.50	CFS-B06053-150B
60 meters	2.00	CFS-B06053-200B
60 meters	2.65	CFS-B06053-265B
60 meters	3.00	CFS-B06053-300B
60 meters	5.00	CFS-B06053-500B

REPLACES

DB-5, DB-5ms,
HP-5, HP-5MS,
Ultra-5, Rtx-5, Rtx-
5MS, Rtx-5sil MS,
SPB-5, MDN-5,
BP-5, CP-Sil 8 CB,
GB-5, 007-5, OV-5,
SE-54, AT-5, and
ZB-5

VB-50/608

(50%Phenyl)-methylpolysiloxane

PRIMARY APPLICATIONS

Drugs
Pharmaceuticals
Herbicides
Steroids
PAHs
Tocopherols
PCBs
EPA Methods
Pesticides
508, 608 and 8080

0.25 mm ID	df	Prod No
15 meters	0.25	CFS-D01525-025B
15 meters	0.50	CFS-D01525-050B
30 meters	0.15	CFS-D03025-015B
30 meters	0.25	CFS-D03025-025B
30 meters	0.50	CFS-D03025-050B
60 meters	0.25	CFS-D06025-025B
60 meters	0.50	CFS-D06025-050B

0.32 mm ID	df	Prod No
15 meters	0.25	CFS-D01532-025B
15 meters	0.50	CFS-D01532-050B
15 meters	1.00	CFS-D01532-100B
30 meters	0.25	CFS-D03032-025B
30 meters	0.50	CFS-D03032-050B
30 meters	1.00	CFS-D03032-100B

0.32 mm ID, cont'd	df	Prod No
60 meters	0.25	CFS-D06032-025B
60 meters	0.50	CFS-D06032-050B
60 meters	1.00	CFS-D06032-100B

0.53 mm ID	df	Prod No
15 meters	0.50	CFS-D01553-050B
15 meters	0.83	CFS-D01553-083B
15 meters	1.00	CFS-D01553-100B
30 meters	0.50	CFS-D03053-050B
30 meters	0.83	CFS-D03053-083B
30 meters	1.00	CFS-D03053-100B
60 meters	0.50	CFS-D06053-050B
60 meters	0.83	CFS-D06053-083B
60 meters	1.00	CFS-D06053-100B

REPLACES

DB-17, AT-50,
SP-2250, DB-17ms,
BPX-50, SP-17,
DB-608, 007-17,
SPB-608, HP-50+,
SPB-50, ZB-50,
Rtx-50

GC CAPILLARY COLUMNS from VICI Metronics

ValcoBond Columns

VB-Wax

100% bonded polyethylene glycol

REPLACES

DB-WAX, DB-WAXetr, HP-WAX, HP-InnoWAX, HP-20M, CB-WAX, Stabilwax, RtxWAX, SUPEROX II, SUPELCOWAX-10, BP-20, CP-WAX, 52 CB, GB-WAX, 007-CW, OV-WAX, AT-WAX, and ZB-WAX

0.10 mm ID	df	Prod No	0.32 mm ID	df	Prod No
10 meters	0.10	CFS-G01010-010A	15 meters	0.25	CFS-G01532-025A
20 meters	0.10	CFS-G02010-010A	15 meters	0.50	CFS-G01532-050A
			15 meters	1.00	CFS-G01532-100A
0.18 mm ID	df	Prod No	30 meters	0.25	CFS-G03032-025A
10 meters	0.18	CFS-G01018-018A	30 meters	0.50	CFS-G03032-050A
20 meters	0.18	CFS-G02018-018A	30 meters	1.00	CFS-G03032-100A
0.25 mm ID	df	Prod No	60 meters	0.25	CFS-G06032-025A
15 meters	0.25	CFS-G01525-025A	60 meters	0.50	CFS-G06032-050A
30 meters	0.25	CFS-G03025-025A			
60 meters	0.25	CFS-G06025-025A	0.53 mm ID	df	Prod No
			15 meters	0.50	CFS-G01553-050A
			15 meters	1.00	CFS-G01553-100A
			30 meters	0.50	CFS-G03053-050A
			30 meters	1.00	CFS-G03053-100A
			60 meters	1.00	CFS-G06053-100A

PRIMARY APPLICATIONS

Alcohols
Aldehydes
Aromatics
Flavors
Fragrances
Organic Acids
Solvents

VB-624/1301

(6% Cyanopropyl-phenyl)-methylpolysiloxane

REPLACES

DB-624, HP-624, HP-VOC, Rtx-624, Rtx-Volatiles, BP-624, Vocol, 007-624, 007-502, NON-PAKD, 624, ZB-624

0.18 mm ID	df	Prod No	0.32 mm ID	df	Prod No
10 meters	1.00	CFS-E01018-100A	15 meters	1.80	CFS-E01532-180A
20 meters	1.00	CFS-E02018-100A	30 meters	1.80	CFS-E03032-180A
30 meters	1.00	CFS-E03018-100A	60 meters	1.80	CFS-E06032-180A
40 meters	1.00	CFS-E04018-100A	0.53 mm ID	df	Prod No
0.20 mm ID	df	Prod No	15 meters	3.00	CFS-E01553-300A
25 meters	1.12	CFS-E02520-112A	30 meters	3.00	CFS-E03053-300A
0.25 mm ID	df	Prod No	60 meters	3.00	CFS-E06053-300A
15 meters	1.40	CFS-E01525-140A	75 meters	3.00	CFS-E07553-300A
30 meters	1.40	CFS-E03025-140A			
60 meters	1.40	CFS-E06025-140A			

PRIMARY APPLICATIONS

EPA Methods
501.3
502.2
503.1
524.2
601
602
8010
8015
8020
8240

VB-1701

(14% Cyanopropyl-phenyl)-methylpolysiloxane

REPLACES

DB-1701, 007-1701, HP-1701, CP-Sil 19 CB, Rtx-1701, SPB-1701, BP-10, ZB-1701

0.25 mm ID	df	Prod No	0.32 mm ID, cont'd	Prod No	
15 meters	0.25	CFS-F01525-025A	60 meters	0.25	CFS-F06032-025A
15 meters	0.50	CFS-F01525-050A	60 meters	0.50	CFS-F06032-050A
30 meters	0.25	CFS-F03025-025A	60 meters	1.00	CFS-F06032-100A
30 meters	0.50	CFS-F03025-050A	0.53 mm ID	df	Prod No
60 meters	0.25	CFS-F06025-025A	15 meters	0.50	CFS-F01553-050A
60 meters	0.50	CFS-F06025-050A	15 meters	1.00	CFS-F01553-100A
0.32 mm ID	df	Prod No	30 meters	0.50	CFS-F03053-050A
15 meters	0.25	CFS-F01532-025A	30 meters	1.00	CFS-F03053-100A
15 meters	0.50	CFS-F01532-050A	60 meters	0.50	CFS-F06053-050A
15 meters	1.00	CFS-F01532-100A	60 meters	1.00	CFS-F06053-100A
30 meters	0.25	CFS-F03032-025A			
30 meters	0.50	CFS-F03032-050A			
30 meters	1.00	CFS-F03032-100A			

PRIMARY APPLICATIONS


Drugs
PAHs
PCBs
Pesticides
Phenols
Solvents
Tranquilizers

TO ORDER

Toll-free 877-737-1887
Tel360-697-9199
Fax360-697-6682

columns@vici.com


VB-Wax

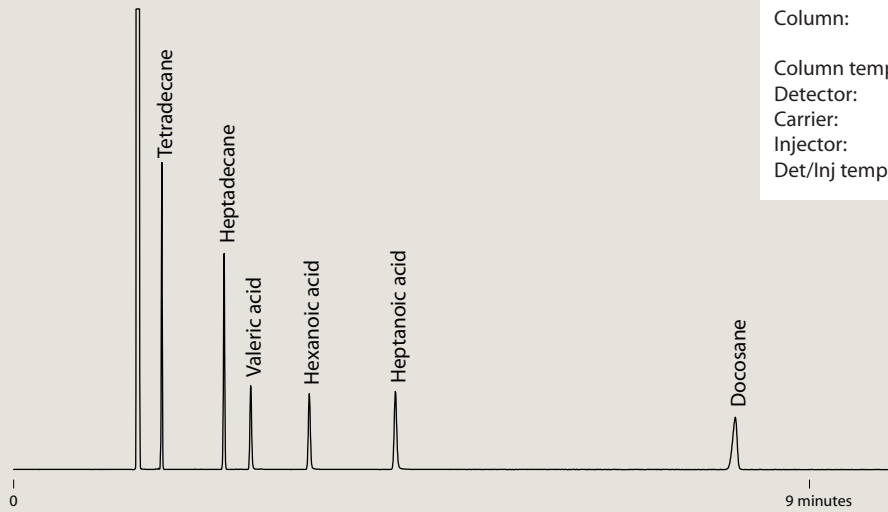

FREE FATTY ACIDS

Column: VB-Wax
 30m x .25mm x .25 μ m
 Column temp: 170°C isothermal
 Detector: FID
 Carrier: Hydrogen at 40 cm/sec
 Injector: Split 100:1
 Det/Inj temp: 220°C

VB-Wax

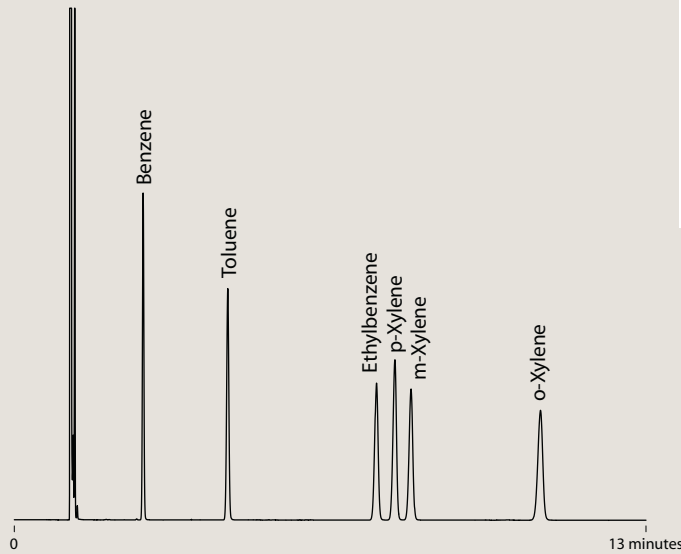

BTEX

Column: VB-Wax
 30m x .25mm x .25 μ m
 Column temp: 40°C isothermal
 Detector: FID
 Carrier: Hydrogen
 Injector: .5 μ l 100:1 split
 Det/Inj temp: 220°C

VB-Wax



GLYCOLS

Sample: 50 ppm EG, PG
 Column: VB-Wax
 30m x .53mm x 1.00 μ m
 Column temp: 80°C for 1 min,
 to 200°C @ 20°C/min,
 hold 5 min
 Detector: FID
 Carrier: Helium at 5 psi
 Injector: 1 μ l splitless, .5 min
 Det/Inj temp: 220°C

GC CAPILLARY COLUMNS from VICI Metronics

ValcoPLOT Columns

Molesieve 5Å

Molesieve 5Å

REPLACES

GS-Molesieve 5A
HP-PLOT Molesieve
CP-Molesieve 5A
Rt-Msieve-5A
MXT-Msieve-51
PLT-5A

ValcoPLOT Molesieve 5Å PLOT columns offer greatly enhanced analytical efficiency at economical prices. Our thick film columns separate Ar/O₂ without the need for cryogenic equipment. ValcoPLOT Molesieve 5Å PLOT thin film columns offer fast elution of carbon monoxide with near perfect peak symmetry, and our proprietary bonding technology ensures that the particles stay put even when columns are used with valves.

PRIMARY APPLICATIONS
Gases

TO ORDER

For prices or more information about your specific application, contact VICI Metronics:

Toll-free 877-737-1887
Tel360-697-9199
Fax360-697-6682

columns@vici.com


Fused silica

0.53 mm ID	df	Prod No
15 meters	20	CFS-X1553-200
15 meters	50	CFS-X1553-500
30 meters	20	CFS-X3053-200
30 meters	50	CFS-X3053-500

Stainless steel

0.53 mm ID	df (µm)	Prod No
15 meters	20	CSS-X1553-200
30 meters	20	CSS-X3053-200
30 meters	50	CSS-X3053-500


ValcoPLOT Molesieve 5Å – Stainless steel

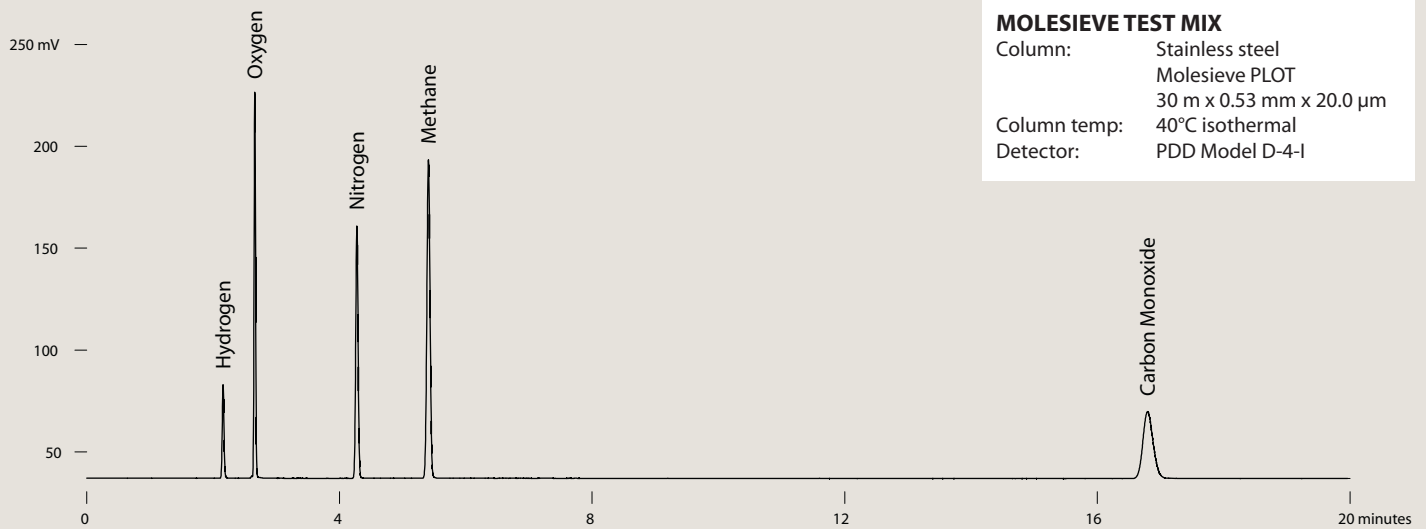

MOLESIEVE TEST MIX

Column: Stainless steel
Molesieve PLOT
30 m x 0.53 mm x 20.0 µm
Column temp: 40°C isothermal
Detector: PDD Model D-4-I

ValcoPLOT Molesieve 5Å – Fused silica

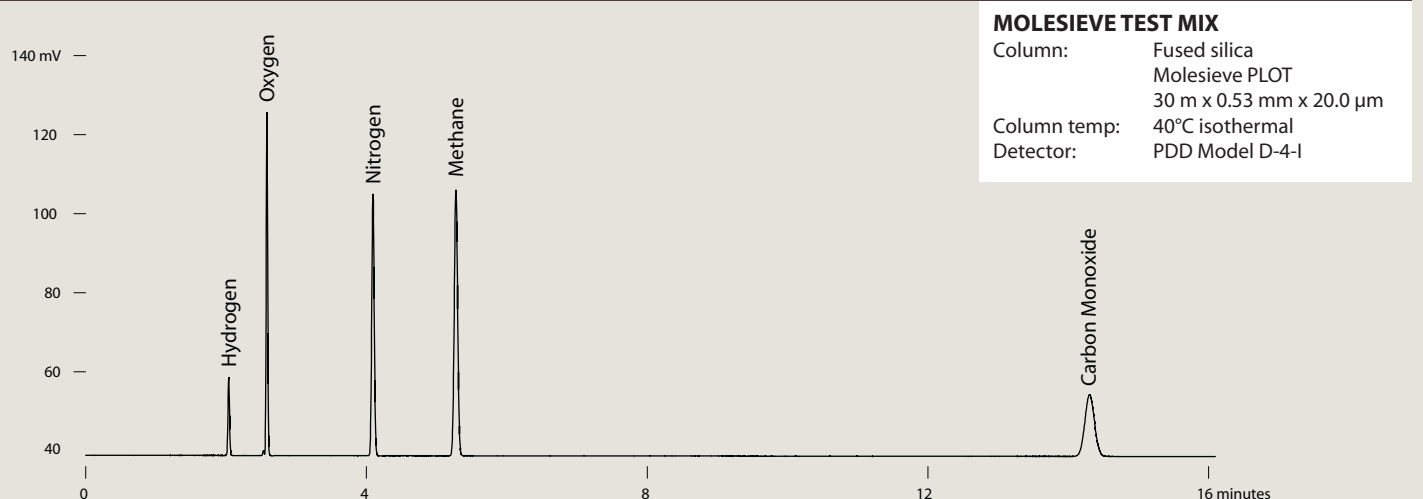


MOLESIEVE TEST MIX

Column: Fused silica
Molesieve PLOT
30 m x 0.53 mm x 20.0 µm
Column temp: 40°C isothermal
Detector: PDD Model D-4-I

ValcoPLOT Molesieve 5Å – Fused silica

AIR

Column: Fused silica
Molesieve PLOT
30 m x 0.53 mm x 50.0 μm
Column temp: 40°C isothermal
Detector: PDD Model D-4-I
Carrier: Helium @ 25cm/sec

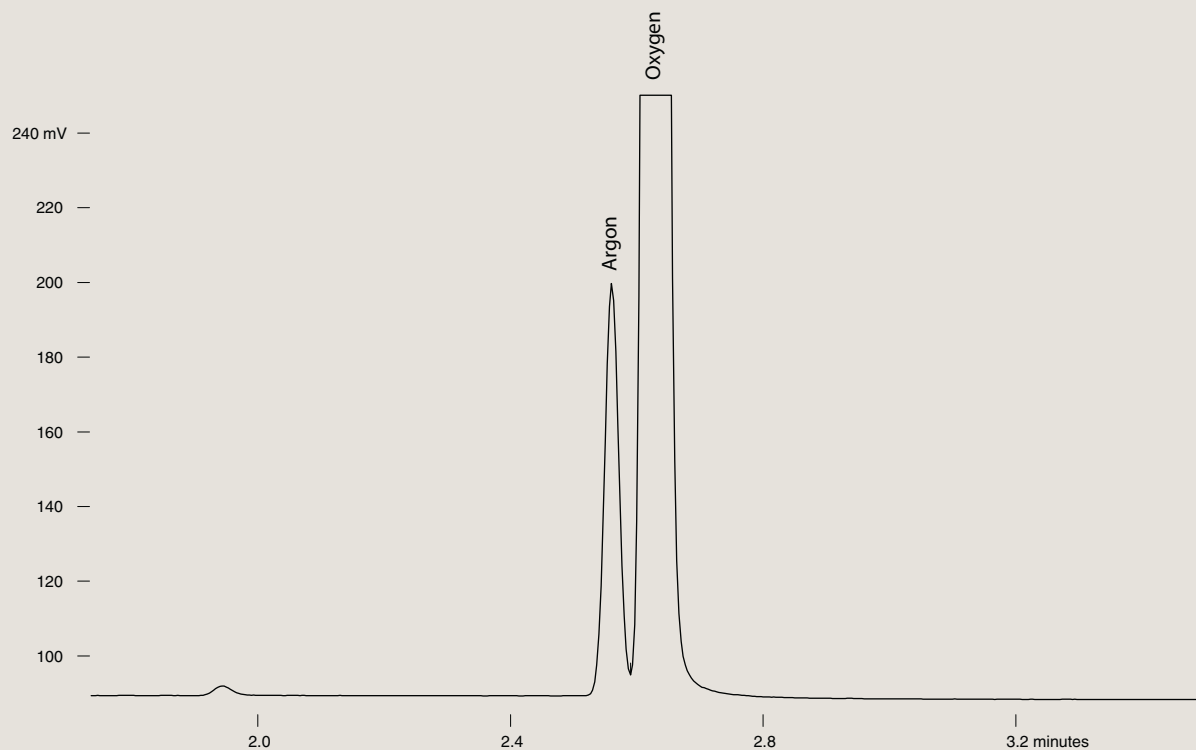

GC CAPILLARY COLUMNS from VICI Metronics

ValcoPLOT Columns

Alumina

Aluminum oxide

REPLACES

GS-Alumina
HP-PLOT Al₂O₃
CP-Al₂O₃/KCl
CP-Al₂O₃/Na₂SO₄
Rt-alumina-PLOT
Al₂O₃/KCl
Al₂O₃/Na₂SO₄

With ValcoPLOT Al₂O₃ PLOT columns there's no need for cryogenic equipment to analyze C1 - C5 hydrocarbons in a main stream of C1 - C5 hydrocarbons. ValcoPLOT Al₂O₃ columns are deactivated with small salt crystals stable to 200°C. KCl deactivation produces a relatively apolar column while Na₂SO₄ produces columns exhibiting increased retention of unsaturated hydrocarbons.

PRIMARY APPLICATIONS

C1 - C5 hydrocarbons

VP-Alumina/KCl

VP-Alumina/Na₂SO₄

Fused silica

0.53 mm ID	df	Prod No
15 meters	10	CFS-Y1553-100
30 meters	10	CFS-Y3053-100
50 meters	10	CFS-Y5053-100

Fused silica

0.53 mm ID	df	Prod No
15 meters	10	CFS-Z1553-100
30 meters	10	CFS-Z3053-100
50 meters	10	CFS-Z5053-100

ValcoPLOT A

High purity Divinylbenzene/ethyleneglycoldimethacrylate

Fused silica

0.32 mm ID	df (µm)	Prod No
15 meters	10	CFS-PA1532-100
30 meters	10	CFS-PA3032-100

0.53 mm ID	df	Prod No
15 meters	20	CFS-PA1553-200
30 meters	30	CFS-PA3053-200

PRIMARY APPLICATIONS

Solvents
Light gases
Light hydrocarbons
Residual solvents

ValcoPLOT D

High purity Divinylbenzene

Fused silica

0.32 mm ID	df	Prod No
15 meters	10	CFS-PD1532-100
30 meters	10	CFS-PD3032-100

0.53 mm ID	df	Prod No
15 meters	20	CFS-PD1553-200
30 meters	20	CFS-PD3053-200

PRIMARY APPLICATIONS

Solvents
Hydrocarbons
Alcohols
Sulfur compounds
Residual solvents
Halogenated hydrocarbons

ValcoPLOT Q

Divinylbenzene

Fused silica

0.32 mm ID	df	Prod No
15 meters	10	CFS-PQ1532-100
30 meters	10	CFS-PQ3032-100

0.53 mm ID	df	Prod No
15 meters	20	CFS-PQ1553-200
30 meters	20	CFS-PQ3053-200

PRIMARY APPLICATIONS

Note: We highly recommend ValcoPLOT D, which has similar retention characteristics but is made from higher purity raw materials.

TO ORDER

Toll-free 877-737-1887
Tel360-697-9199
Fax360-697-6682

columns@vici.com


ValcoPLOT A



C1 - C3 HYDROCARBONS

Column: HayeSep A PLOT
 30m x .53mm x 20.0µm
 Column temp: 60°C isothermal
 Detector: PDD
 Carrier: Helium
 Det/Inj temp: 165°C


ValcoPLOT D

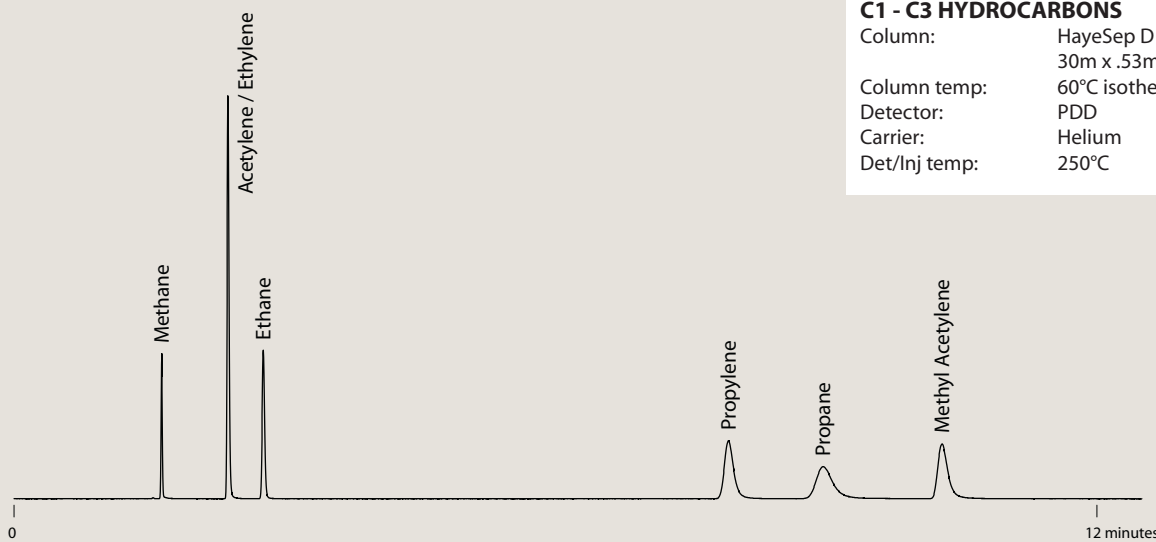

C1 - C3 HYDROCARBONS

Column: HayeSep D PLOT
 30m x .53mm x 20.0µm
 Column temp: 60°C isothermal
 Detector: PDD
 Carrier: Helium
 Det/Inj temp: 250°C

ValcoPLOT D

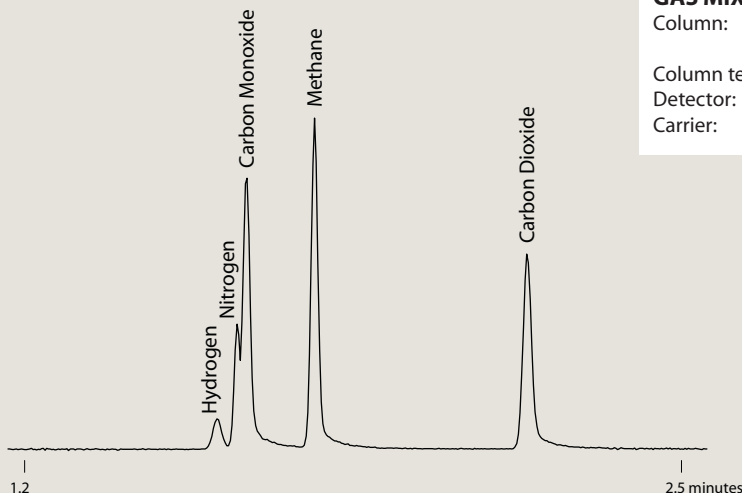

GAS MIXTURE

Column: HayeSep D PLOT
 30m x .53mm x 20.0µm
 Column temp: 40°C isothermal
 Detector: PDD
 Carrier: Helium

GC CAPILLARY COLUMNS from VICI Metronics

ValcoPLOT Columns

ValcoPLOT B

Divinylbenzene/polyethyleneimine

Fused silica

0.32 mm ID	df	Prod No	0.53 mm ID	df	Prod No
15 meters	10	CFS-PB1532-100	15 meters	20	CFS-PB1553-200
30 meters	10	CFS-PB3032-100	30 meters	20	CFS-PB3053-200

ValcoPLOT C

Divinylbenzene/acrylonitrile

Fused silica

0.32 mm ID	df	Prod No	0.53 mm ID	df	Prod No
15 meters	10	CFS-PC1532-100	15 meters	20	CFS-PC1553-200
30 meters	10	CFS-PC3032-100	30 meters	20	CFS-PC3053-200

ValcoPLOT N

Divinylbenzene/ethyleneglycoldimethacrylate

Fused silica

0.32 mm ID	df	Prod No	0.53 mm ID	df	Prod No
15 meters	10	CFS-PN1532-100	15 meters	20	CFS-PN1553-200
30 meters	10	CFS-PN3032-100	30 meters	20	CFS-PN3053-200

ValcoPLOT P

Divinylbenzene/styrene

Fused silica

0.32 mm ID	df	Prod No	0.53 mm ID	df	Prod No
15 meters	10	CFS-PP1532-100	15 meters	20	CFS-PP1553-200
30 meters	10	CFS-PP3032-100	30 meters	20	CFS-PP3053-200

ValcoPLOT R

Divinylbenzene/N-vinyl-2-pyrrolidinone

Fused silica

0.32 mm ID	df	Prod No	0.53 mm ID	df	Prod No
15 meters	10	CFS-PR1532-100	15 meters	20	CFS-PR1553-200
30 meters	10	CFS-PR3032-100	30 meters	20	CFS-PR3053-200

ValcoPLOT S

Divinylbenzene/4-vinyl-pyridine

Fused silica

0.32 mm ID	df	Prod No	0.53 mm ID	df	Prod No
15 meters	10	CFS-PS1532-100	15 meters	20	CFS-PS1553-200
30 meters	10	CFS-PS3032-100	30 meters	20	CFS-PS3053-200


TO ORDER

For prices or more information about your specific application, contact VICI Metronics:

Toll-free 877-737-1887
Tel360-697-9199
Fax360-697-6682

columns@vici.com

Reduced Breakdown Injection Port Liners

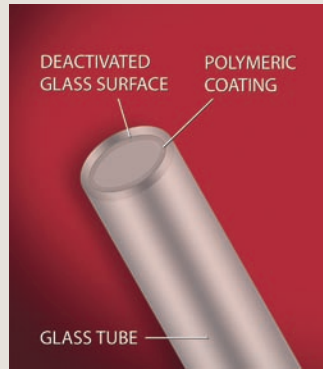

- Reduce breakdown of Endrin and DDT
- Increase the interval between liner changes



DDT and Endrin are easily degraded in the injection port; with non-deactivated liners and those filled with non-deactivated glass wool, Endrin breakdown can be as high as 98%. EPA method 8081A states, "If degradation of either DDT or Endrin exceeds 15%, take corrective action before proceeding with calibration."

VICI reduced breakdown liners are produced by applying a highly-crosslinked siloxane over a conventionally deactivated liner. The resulting liner contributes less to breakdown than any other component of the injection system.

Reduced breakdown injection port liners

Package of 5 liners.

For injector	Description	Prod No
Agilent/Finnegan	2 mm straight splitless	LNR-HP2-5
	4 mm straight splitless	LNR-HP4-5
	2 mm gooseneck	LNR-GS2-5
	4 mm gooseneck	LNR-GS4-5
	4 mm double gooseneck	LNR-DGS4-5
Gerstel CIS-4/PTV	Baffled	LNR-CIS4-B-5
Varian CP-1177	2 mm gooseneck	LNR-VAR2-5
	4 mm gooseneck	LNR-VAR4-5
Varian 1078/1079	2 mm gooseneck	LNR-VARGS2-5
	3.4 mm gooseneck	LNR-VAR3.4-5

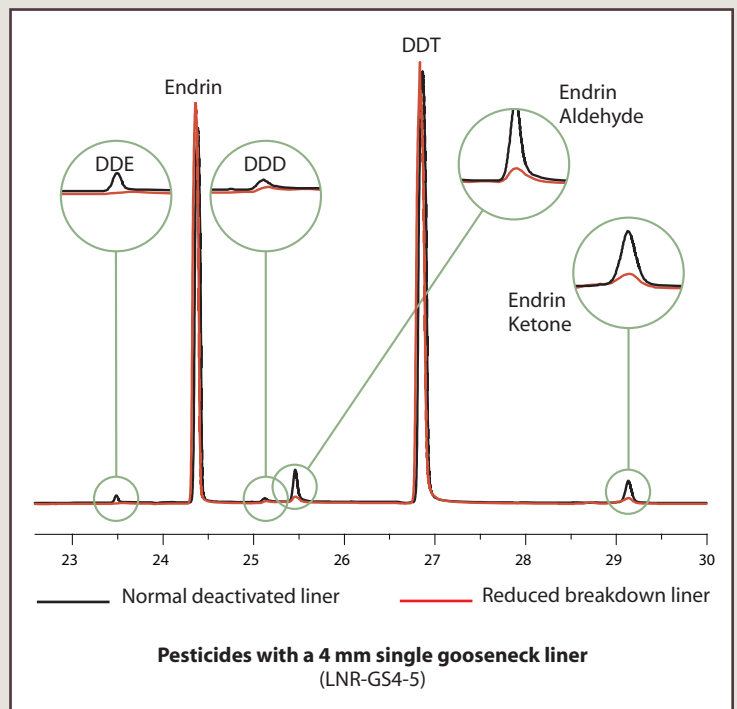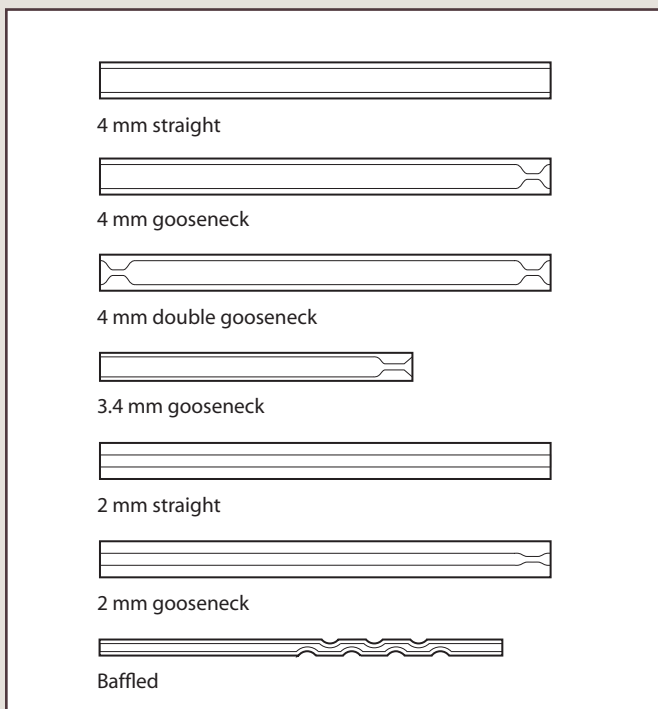




Gas Purifiers from VICI Metronics

Gas Specific Purifiers and Contaminant Traps

- Original equipment in Agilent® Mass Spec and LC Mass Spec
- Provide point-of-use gas purification of helium, hydrogen, methane, nitrogen, carbon dioxide, or air
- Reduce gas impurities from high PPM to low PPB levels
- Decrease baseline noise and increase GC/MS sensitivity
- Replace three traps with one purifier

Gas purity is critical to GC performance. Several types of contaminants are detrimental – notably moisture, hydrocarbons, and oxygen. VICI Metronics gas purifier modules are designed to be placed in-line with the GC carrier or detector gas supply to remove these contaminants from the analytical gases prior to their entering the GC. Gas purification is optimized by a multiple bed format. Each bed functions at a lower contaminant concentration, resulting in a series of contaminant concentration gradients across the length of the gas purifier.

VICI Metronics gas purifiers dramatically reduce contaminant levels and absorb a greater variety of contaminants than other gas purification products. Advanced materials and design features guarantee that the modules will produce gases that are at least a factor of ten higher than a 99.9999% “chromatography grade” cylinder of gas when the purifier is supplied by a 99.995% cylinder. The cost difference between the two grades of gas will pay for the cost of the gas purifier several times over during its operating life.

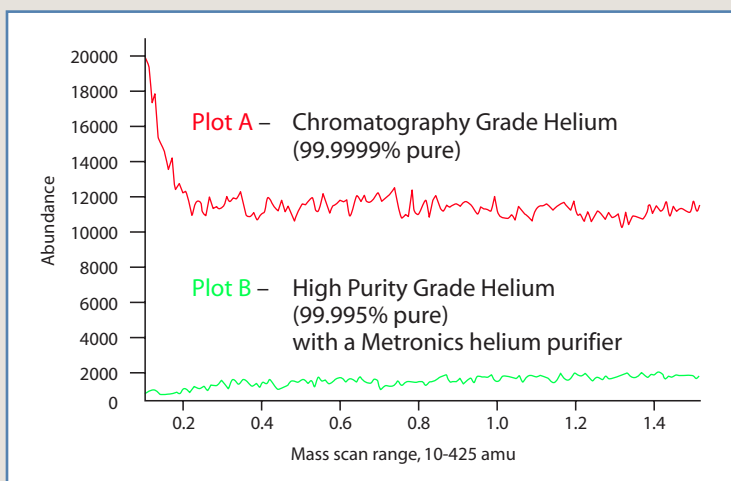

TO ORDER

For prices or more information about our gas purifiers, contact VICI Metronics:


Toll-free 877-737-1887
Tel360-697-9199
Fax360-697-6682

vicimetronics.com

Gas Specific Purifiers and Contaminant Traps

Every connection in your gas delivery system has the potential for leaks; the more fittings you have, the greater the potential. Using a VICI Metronics purifier or trap (A) minimizes the

number of fittings as compared to a typical manifold system (B) or contaminant trap configuration with multiple components (C).

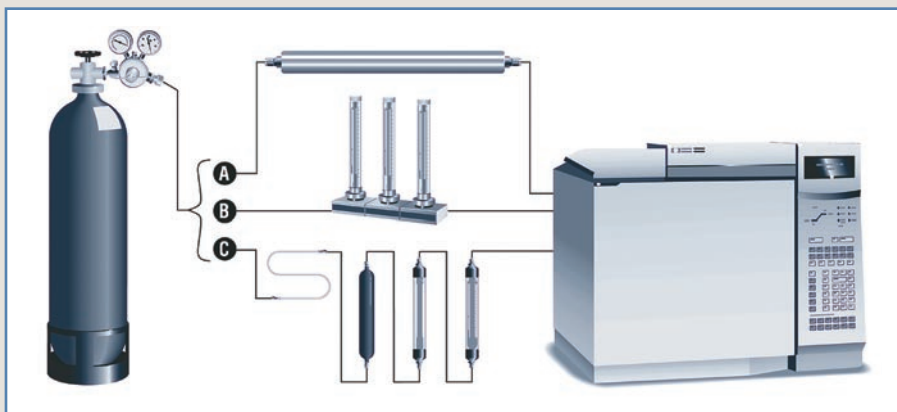

SPECS

22.5" long x 1.5" diameter
(purifiers noted with * in the charts are 12" long)
Max inlet pressure 1000 psi (6895 kPa)
Recommended flow 500 mL/min

Gas Specific Purifiers

Description	1/8" fitting	1/4" fitting
Helium purifier	P100-1	P100-2
Hydrogen purifier	P200-1	P200-2
Nitrogen purifier	P300-1	P300-2
Nitrogen purifier for LC/MS apps	P310-1	P310-2
Purifier for nitrogen generators	P350-1	P350-2
Air purifier	P400-1	P400-2
Methane purifier*	P500-1	P500-2
Carbon dioxide (gas) purifier	P600-1	P600-2
Carbon dioxide (liquid) purifier	P700-1	P700-2

*12" long


Contaminant Traps

Description	1/8" fitting	1/4" fitting
Moisture trap	T100-1	T100-2
Hydrocarbon trap	T200-1	T200-2
Oxygen trap	T300-1	T300-2
Sulfur trap*	T400-1	T400-2
Sulfur trap	T401-1	T401-2
Mercury trap*	T700-1	T700-2



PPB at outlet (based on 50 ppm nominal inlet concentration level)

Description	CO	CO ₂	O ₂	H ₂ O	Sulfur compounds	Non-methane hydrocarbons
Helium purifier	<1	<1	<1	<1	<1	<3
Hydrogen purifier	<1	<1	<1	<1	<1	<3
Air purifier				<1		<3
Methane purifier	<1	<1	<1	<1	<1	<3
Nitrogen purifier	<1	<1	<1	<1	<1	<3
Nitrogen purifier for LC/MS apps				<25	<25	<25
Purifier for nitrogen generators				<25	<25	<25
Moisture trap				<1		
Hydrocarbon trap						<3
Oxygen trap			<1	<1		
Sulfur trap				<1	<1	

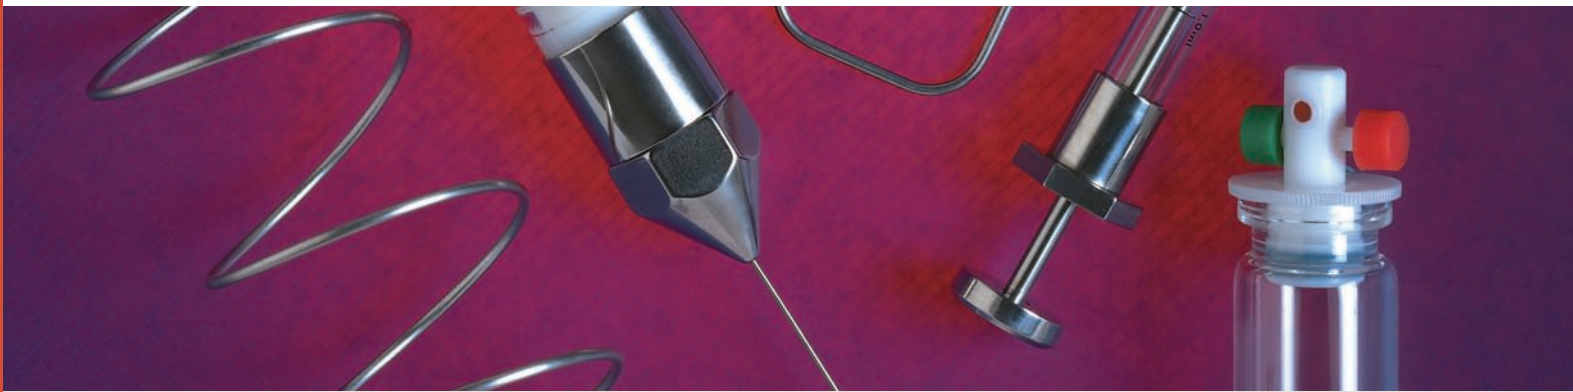

Analytical Syringes, Valves, Probes, and Custom Bent Tubing from VICI Precision Sampling

Micro Valves for GC and LC

- 200 psi, .060" bore
- Compact 1" design
- Convenient panel mount
- Variety of configurations

Simplify your liquid or gas handling application with a VICI Precision Sampling Micro valve. The unique design of the fitting detail allows a leak-free seal with no potential for rotor damage from overtightening. Internal parts are PEEK and PTFE.



Micro valves for GC and LC

1/4-28

	Prod No	3 PORT	4 PORT		SPECS	
"T" flow path	3 ports			"T"	200 psi .060" bore 1/4-28 fitting detail All polymer-based materials	
	4 ports					660100
180° flow path	2 ports			180°		
	4 ports					660200
90° flow path	2 ports			90°		
	3 ports					660300
	4 ports				660320	660320

MORE INFORMATION
1/4-28 fittings . . . pp 68-78

TO ORDER
Toll-free 800-828-1653
Tel225-927-1128
Toll-free
fax866-429-7741
Fax225-923-1331

FOR OUR COMPLETE LINE OF PRODUCTS
Visit our website at viciprecisionsampling.com
or call us for a catalog:

VICI Precision Sampling's patented Pressure-Lok® syringes feature a Teflon® (PTFE) plunger tip, stress-formed by a special process to assure a leak-tight seal. The self-lubricating plunger tip stays smooth for the life of the syringe, with none of the seizing or residue buildup associated with conventional all-metal plungers.

The needle is sealed by a PTFE sleeve or packing, which effectively isolates the sample from the needle cement, preventing any possible dissolution of the adhesive or contamination of the sample. All Pressure-Lok syringes feature ultra smooth bores, easily replaceable parts, low dead volume, crisp clean graduations, and precision calibration.

Series A-2

for GC

The A-2 features a push-button valve for 250 psi sample storage in syringes as small as 25 µl. Small liquid samples with low-boiling components are not lost through evaporation, as often occurs with ordinary syringes.

The positive rear stop (in 250 µl and larger sizes) prevents plunger blowout at elevated pressures. The Series A-2 syringe has all the standard Pressure-Lok features such as a PTFE plunger tip, PTFE-sealed needle, and ultrasmooth bore. Replacement components are available for easy repairs.

SPECS

Removable needles
Bevel, open end
Needle size:
.028" x .005" x 2"
(25, 50, and
100 µl)
.029" x .012" x 2"
(all other
sample sizes)
250 psi max,
gases and liquids

Sample size	Standard	Luer
	Prod No	Prod No
25 µl	PS-050023	PS-050043
50 µl	PS-050024	PS-050044
100 µl	PS-050025	PS-050045
250 µl	PS-050031	PS-050051
500 µl	PS-050032	PS-050052
1 ml	PS-050033	PS-050053
2 ml	PS-050034	PS-050054
5 ml	PS-050035	PS-050055
10 ml	PS-050036	PS-050056

Replacement needles (Pkg/3)	Bevel, open end	Side port, taper
	Size Prod No	Prod No
Pressure-Lok	.028" x .005" x 2"	PS-943050
	.029" x .012" x 2"	PS-943051
Luer	.028" x .006" x 2"	PS-943060
	.028" x .016" x 2"	PS-943061
		PS-943052
		PS-943062

SAFETY NOTE

To prevent possible injury, proper safety precautions should always be observed when pressurizing glass cylinders such as syringes.

Not for medical use.

NEEDLE TIPS




Blunt, open end



Bevel, open end



Side port, taper

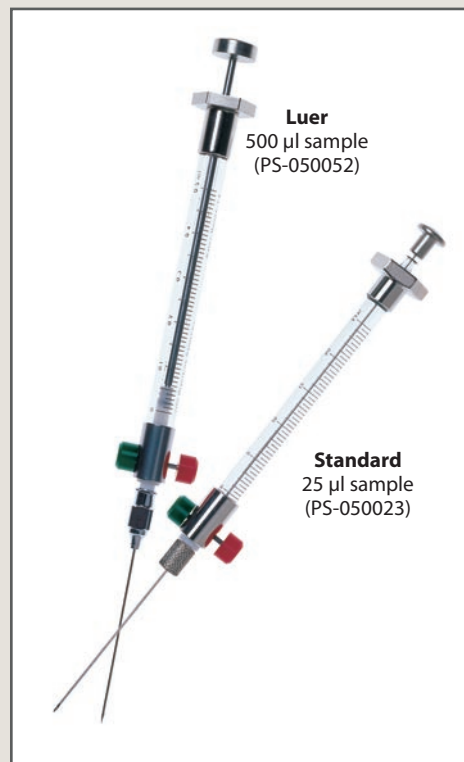

Standard
25 µl sample
(PS-050023)

Luer
500 µl sample
(PS-050052)

VICI PRECISION SAMPLING

Gas and Liquid Syringes

Series C-160

for GC

The C-160 offers day-in, day-out dependability at an economical price. A plunger tip of stress-formed virgin PTFE is self-lubricating and durable, and the PTFE needle seat at the rear of the needle prevents possible dissolution of the needle cement or contamination of the sample.


Choose between a fixed or removable needle version. Replacement needles are open end bevel type, sized .019" x .005" x 2.25", and come complete with an integral PTFE seal for a low dead volume connection and a leak-tight fit.

SPECS

Fixed and removable needles
 Bevel, open end
 Fixed needle size: .019" x .005" x 2"
 Removable needle size: .019" x .005" x 2.25"
 250 psi max, gases and liquids

Sample size	Fixed needle Prod No	Removable needle Prod No
5 µl	PS-160021	PS-160221
10 µl	PS-160022	PS-160222
25 µl	PS-160023	PS-160223
50 µl	PS-160024	PS-160224
100 µl	PS-160025	PS-160225

Replacement needles (Pkg/3)	Bevel, open end Prod No
Size	
.019" x .005" x 2.25"	PS-123050

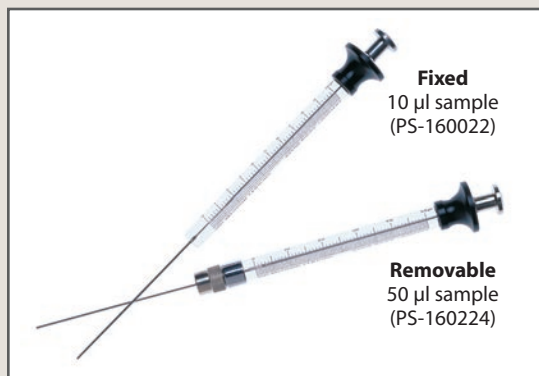

Syringes for Valco, Cheminert, and Rheodyne HPLC injectors


Syringes used to fill a loop on a sample injection valve have blunt, smooth ends. For a sample to be delivered with any repeatability, the end of the needle must contact the bottom of the valve's fitting detail uniformly and seal on the outside of the tip. All Precision Sampling syringes for valve injections have smooth, burr-free ends that fit the valve fitting details perfectly. The standard HPLC syringe is our basic C-160 with a 2" long 22 gauge blunt tip needle.

SPECS

Removable needles
 Blunt tip, open end
 Needle size: 22 gauge x 2"
 250 psi max

Sample size	Fixed needle Prod No	Removable needle Prod No
5 µl	PS-160021R	PS-160221R
10 µl	PS-160022R	PS-160222R
25 µl	PS-160023R	PS-160223R
50 µl	PS-160024R	PS-160224R
100 µl	PS-160025R	PS-160225R

Replacement needles (Pkg/3)	Prod No
	PS-123050R

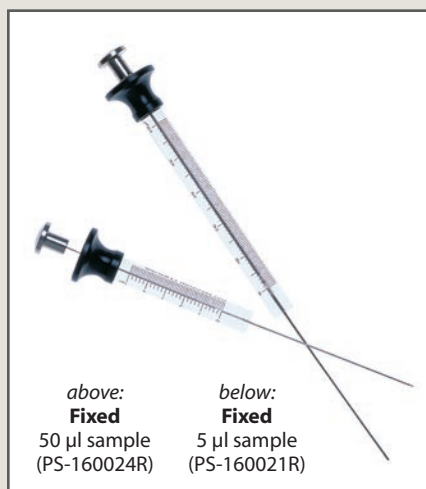

MORE INFORMATION

Fill ports page 40
 Luer adapters 41

NEEDLE TIPS



Blunt, open end



Bevel, open end



Side port, taper

TO ORDER

Toll-free 800-828-1653
 Tel 225-927-1128
 Toll-free
 fax 866-429-7741
 Fax 225-923-1331

FOR OUR COMPLETE LINE OF PRODUCTS

Visit our website at viciprecisionsampling.com or call us for a catalog:

Mininert push-button valves are highly dependable, leak-tight closures for screw-cap vials and other laboratory containers. When used with a glass vial, only PTFE and glass are in contact with the contents. Their unique features make Mininert valves the ideal closure for

calibration standards, air- or moisture-sensitive fluids, derivatizing reagents, or volatile chemicals. Operation is extremely simple – push the green button to open the valve, insert the needle through the septum and take a sample, withdraw the needle, and push the red button to close the valve.



Valves for vials

The screw-cap Mininert is available in a variety of sizes. The crimp-top valve for 13 mm ID glassware slides into the neck of the vial and features a threaded flange which is turned to provide a leak-tight fit.

Pkg/12:	Cap / thread size	Prod No
	13 mm-425	PS-614158
	15 mm-425	PS-614160
	18 mm-400	PS-614161
	20 mm-400	PS-614170
	24 mm-400	PS-614163
	Crimp top	PS-614250

Valves with threaded fittings

Our threaded designs offer positive on/off fluid control as an in-line valve or syringe access as a termination valve at a sample point. In-line valves are 1/4-28 male to male or 1/4-28 female to female. Termination valves are offered in 1/4-28 male or female and 1/8" NPT male or female.

In-line valves	Prod No
1/4-28 male to male	PS-631205
1/4-28 female to female	PS-631206

Termination valves	Prod No
1/4-28 male	PS-631201
1/4-28 female	PS-631203
1/8" NPT male	PS-631202
1/8" NPT female	PS-631204

Replacement septa and septum installation tool

These silicone septa fit all Mininert valves. The installation tool is a handy device for quickly removing and replacing needle seal septa.

Septa, pkg/50	PS-644350
Installation tool	PS-644850

Mininert syringe valves

These convenient add-on valves allow our Series C and D syringes to store samples at up to 250 psi. The valve body is all PTFE, with a stainless steel stem. Also available to fit luer-tip syringes from any manufacturer. All accept traditional luer needles.

For C or D syringe	PS-654050
For Luer-tip syringe	PS-654051

SPECS

TEMPERATURES


Mininert valves can be used at temperature up to 105°F. However, after use at high temperatures, the valve may leak slightly when cooled to room temperature.

MATERIALS

PTFE is highly inert and may be used with most common materials. It is particularly useful for working with most acids and organic solvents. However, problems may be encountered when used with organometallics and some strong bases. We recommend actual exposure tests before use with any material.

PRESSURE

The sealing ability of Mininert valves is more than adequate for containing most volatile liquids and gases at low pressures. Mininert valves have been used as high as 120 psi without leakage, but this is **not** a recommendation for pressurizing glass containers to these levels. Such pressurization of glass containers can be extremely dangerous.





General Reference

This section contains background information to supplement the product discussions on the preceding pages. You will find a glossary of terms, safety and trademark information, and discussions of the mechanical and chemical properties of the materials used in the manufacturing of our products. Additional information, including a complete library of technical notes and manuals, can be found in the support section of our website at www.vici.com.

Safety

1. Never tighten or loosen a fitting or valve connection while it is pressurized. Provisions should be made within the system to release pressure via suitable valve components.
2. Do not exceed pressure or temperature specifications. Note that in many cases, the system pressure is limited by the tubing used, not the fittings.
3. The use of toxic or hazardous fluids requires extra caution during operation or maintenance. The user is responsible for ensuring safe operation and for understanding the nature of the fluids and chemistry involved.
4. The use of thread lubricants or sealants is required only on tapered pipe threads. These sealants and lubricants may have different temperature limits or chemical compatibility than the valves or fittings.

CAUTION

The improper selection or use of components or systems described herein can cause personal injury or property damage.

The system designer and user are solely responsible for the selection of products suitable for the specific requirements of the application, as well as proper installation, operation, and maintenance of these products.

Compatibility with hazardous fluid streams, environmental conditions, and mechanical requirements are the responsibility of the user.

Warranty and Contact Information

NORTH, CENTRAL, AND SOUTH AMERICA (except CANADA); AUSTRALIA and NEW ZEALAND**Valco Instruments Co. Inc.****SALES**

- Phone: 713-688-9345
800-367-8424 *
* USA and Canada only
- Fax: 713-688-8106
- Email: sales_usa@vici.com

TECHNICAL

- Phone: 713-688-9345
- Fax: 713-956-1649
- Email: tech_usa@vici.com

SERVICE

- Phone: 713-688-9345
- Fax: 713-688-7618

P.O. Box 55603
Houston, TX 77255
USA

valco@vici.com

EUROPE, MIDDLE EAST, ASIA, and AFRICA**VICI AG International****SALES**

- Phone: Int + 41·41·925-6200
- Fax: Int + 41·41·925-6201
- Email: order@vici.ch

TECHNICAL

- Phone: Int + 41·41·925-6200
- Fax: Int + 41·41·925-6201
- Email: support@vici.ch

SERVICE

- Phone: Int + 41·41·925-6200
- Fax: Int + 41·41·925-6201

Parkstrasse 2
CH-6214 Schenkon
Switzerland
info@vici.ch

CANADA**VICI Valco Instruments Canada Corporation**

- Tollfree: 866-297-2626
- Phone: 613-342-2600
- Fax: 613-342-0111
- Email: canada@vici.com

26 Water Street East
Brockville
Canada K6V 1A1

Warranty

This Limited Warranty gives the Buyer specific legal rights, and a Buyer may also have other rights that vary from state to state.

For a period of 365 calendar days from the date of shipment, Valco Instruments Company, Inc. (hereinafter Seller) warrants the goods to be free from defect in material and workmanship to the original purchaser. During the warranty period, Seller agrees to repair or replace defective and/or nonconforming goods or parts without charge for material or labor OR at Seller's option demand return of the goods and tender repayment of the price. Buyer's exclusive remedy is repair or replacement of defective and nonconforming goods OR at Seller's option return of the goods and repayment of the price.

Seller excludes and disclaims any liability for lost profits, personal injury, interruption of service, or for consequential incidental or special damages arising out of, resulting from, or relating in any manner to these goods.

This Limited Warranty does not cover defects, damage, or nonconformity resulting from abuse, misuse, neglect, lack of reasonable care, modification, or the attachment of improper devices to the goods. This Limited Warranty does not cover expendable items, such as but not limited to valve seals or ferrules. This warranty is VOID when repairs are performed by a non-authorized service center or representative.

If you have any problem locating an authorized service center or representative, please call, fax, or write the Service Department, listed at left.

At Seller's option, repairs or replacements will be made on site or at the factory. If repairs or replacements are to be made at the factory, Buyer shall return the goods prepaid and bear all the risks of loss until delivered to the factory. If Seller returns the goods, they will be delivered prepaid and Seller will bear all risks of loss until delivery to Buyer. Buyer and Seller agree that this Limited Warranty shall be governed by and construed in accordance with the laws of the State of Texas.

The warranties contained in this agreement are in lieu of all other warranties expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

This Limited Warranty supersedes all prior proposals or representations oral or written and constitutes the entire understanding regarding the warranties made by the Seller to Buyer. This Limited Warranty may not be expanded or modified except in writing signed by the parties hereto.

Properties of Metals

Stainless steel, Type 316

This is the standard tubing material for chromatography, suitable for a wide variety of applications. It is cold drawn seamless, not welded, with close tolerances held on both ID and OD. We neither recommend nor offer Type 304 stainless steel for analytical applications.

Austenitic stainless steels may be used for most chromatographic applications. Type 316 is most commonly used for HPLC because of its superior chloride ion resistance.

Stainless steel, Type 303

Recommended for GC use and general purpose connections, combining excellent machining characteristics with good resistance to corrosion and high temperature oxidation. Susceptible to attack by chlorides, iodides, and bromides.

Stainless steel, gold-plated

Improved inertness and high-integrity sealing for applications such as ultra pure gas analysis.

Electroformed nickel (EFNI)

We electroplate pure nickel over a diamond drawn mandrel in a continuous process, then carefully separate and remove the mandrel from the tubing. The result is an extremely inert and smooth interior surface (1–2 microinch finish). It is widely used for transfer lines, since it minimizes the potential for carryover or cross contamination often found with mill-drawn Nickel 200, due to its rough interior surface. Unlike glass- or silica-lined stainless, EFNI can easily accept tight bends and cutting without heating, and does not release damaging glass fragments or silica particles. Electroformed nickel has more in common with fused silica than drawn nickel tubing in terms of surface inertness and smoothness.

Hastelloy C® series

This is the material most often recommended for corrosion resistance – it works when nothing else will. This versatile nickel-chromium molybdenum alloy has excellent resistance to most acids, including strong oxidizers such as ferric and cupric chlorides; nitric, formic and acetic acids; wet chlorine; sea water and brine solutions; and mixtures containing nitric acid or oxidizing acids with chloride ions. VICI uses only HC-22 for fittings and valve stators, rather than the older and less corrosion resistant HC-276.

The best choice for most special applications where HPLC grade stainless cannot be used, Hastelloy C has excellent resistance to pitting, stress corrosion cracking, and oxidizing atmospheres up to temperatures well beyond any other standard components of the chromatographic system.

Inconel 600

One of the few metals which can be used with hot, strong solutions of magnesium chloride. Good for most severely corrosive environments at elevated temperatures. Resistant to sulfuric and hydrofluoric acid, and to all concentrations of phosphoric acid at room temperature. Poor resistance to nitric acid.

Monel 400

High resistance to hydrochloric, hydrofluoric, and sulfuric acid under reducing conditions. Attacked by oxidizing acid salts and hypochlorites. High resistance to chlorinated solvents and nearly all alkalis.

Nickel 200

Excellent resistance to caustics, high temperature halogens and hydrogen halides, and salts other than oxidizing halides. Good resistance to caustic soda and other alkalis except ammonium hydroxide.

The industry standard nickel alloy tubing, containing trace amounts of copper, carbon, silicon, and other elements which impart certain mechanical characteristics. Like our 316 stainless, this tubing is cold drawn to close ID and OD specifications, and is suitable for many applications where a relatively inert and low cost nickel is required. While more inert than 316 SS in most applications, it is still absorptive and has a relatively rough interior. Use electroformed nickel tubing for applications requiring a high level of inertness or finish.

Nitronic 50

Good resistance to chlorides, sulfuric acid, and sea water. Resistant to sulfur gases such as hydrogen sulfide and sulfur dioxide.

Nitronic 60

Chemical resistance is similar to Type 316 stainless, but its resistance to galling and oxidation make it superior to Type 316 or 303 in the majority of applications. This is the standard material in Valco and Cheminert metal valve lines.

**MATERIAL AVAILABILITY
BY PRODUCT LINE**

Note: This list represents materials available in at least some of the products in the lines listed. Not all products in a line are available in all the materials mentioned.

Fittings**Cheminert**

CTFE
PEEK
PFA
Polypropylene
Stainless steel, Type 316

Valco

300 series stainless steel
PEEK

Ferrules**Valco**

CTFE
FEP
Hastelloy C
Nickel
PFA
Polyimide, graphite
Polyimide, Valcon
Polyimide, virgin
PTFE, virgin
PTFE, glass-filled
Stainless, Type 303
Stainless, Type 316
Stainless, gold-plated
Titanium
Brass

Cheminert

PEEK

Tubing

Electroformed nickel
(EFNI)
ETFE
FEP
Hastelloy C
Nickel 200
PEEK
PTFE
Stainless steel, Type 316
Titanium

Valve rotors**Cheminert**

Valcon E
Valcon E2
Valcon E3
Valcon H
Valcon M
Valcon P
Valcon T
Valcon TF

Diaphragm

A specialized polyimide

Valco

Valcon E
Valcon E2
Valcon H
Valcon M
Valcon P
Valcon R
Valcon T
Valcon TF

**Valve
stators/ bodies****Cheminert**

CTFE
Hastelloy C
Nitronic 60 stainless
PAEK
PPS
PVDF
Stainless steel, Type 316
Titanium

Diaphragm

Hastelloy C
Nitronic 60
Stainless steel, Type 316

Valco

Hastelloy C
Inconel 600
Monel 400
Nickel 200
Nitronic 50
Nitronic 60
Stainless steel, Type 316
Titanium
Zirconium

Titanium

Although it is more difficult to machine than common alloys containing aluminum and vanadium, Valco uses Grade 2 pure titanium in order to avoid possible contamination of the sample stream with these metals.

Good for organic and inorganic salts except aluminum and calcium chlorides, and all alkalis except boiling concentrated potassium hydroxide. Good with dilute, low temperature formic, lactic, sulfuric, hydrochloric, and phosphoric acids, but rapidly attacked by hydrofluoric acid. Good with dilute nitric acid at low temperatures; corrodes at high concentrations and temperatures. Can ignite with fuming nitric acid. Attacked by oxalic acid, concentrated phosphoric acid, hot trichloroacetic acid, and zinc chloride.

Due to the nature of this metal, valves made of titanium typically have a shorter lifetime than HPLC grade stainless steel or Hastelloy C-22.

Zirconium

Excellent resistance to hydrochloric acid, good with hot sulfuric acid at concentrations up to 70% and boiling nitric acid at up to 90%. Attacked by hydrofluoric acid.

Brass

Used where a soft metal ferrule is desirable but no corrosive materials are present. Although Valco brass ferrules work as replacements in inexpensive commercial brass fittings, they are generally not recommended for chromatography applications.

Properties of Polymers

CTFE

Chlorotrifluoroethylene, is the generic name for the material produced as Kel-F® and as Aclar®. It is very resistant to all chemicals except THF and some halogenated solvents, and is resistant to all inorganic corrosive liquids, including oxidizing acids. CTFE can be used at temperatures up to 100°C. Swells in ketones.

ETFE

Ethyltrifluoroethylene is the generic name for the material such as Tefzel®. A fluoropolymer used for sealing surfaces, it is resistant to most chemical attack; however, some chlorinated chemicals will cause a physical swelling of ETFE tubing.

FEP

Fluorinated ethylene propylene is another member of the fluorocarbon family with similar chemical properties. It is generally more rigid than PTFE, with somewhat increased tensile strength. It is typically more transparent than PTFE, slightly less porous, and less permeable to oxygen. FEP is not as subject to compressive creep at room temperature as PTFE, and because of its slightly higher coefficient of friction is easier to retain in a compression fitting.

PAEK

Polyaryletherketone is the generic name for the family of polyketone compounds. (See PEEK.) PAEK includes PEK, PEEK, PEKK, and PEKEKK, which differ in physical properties and, to a lesser degree, in inertness.

VICI utilizes a range of proprietary PAEK-based composites (PEEK and others) for valve and fitting components. These composites resist all common HPLC solvents and dilute acids and bases. However, concentrated or prolonged use of halogenated solvents may cause the polymer to swell. Avoid concentrated sulfuric or nitric acids (over 10%).

PEEK

Considered relatively inert and biocompatible, polyetheretherketone tubing can withstand temperatures up to 100°C. Under the right circumstances, .005" – .020" ID tubing can be used up to 5000 psi for a limited time, and 0.030" to 3000 psi. Larger IDs are typically good to 500 psi. These limits are substantially reduced at elevated temperatures and in contact with some solvents or acids.

Its mechanical properties allow PEEK to replace stainless in many situations and in some environments where stainless would be too reactive. However, PEEK can be somewhat absorptive of solvents and analytes, notably methylene chloride, DMSO, THF, and high concentrations of sulfuric and nitric acid.

PEEK, glass-filled

This form of PEEK has better mechanical properties than natural PEEK, and performs extremely well in products such as ferrules.

PFA

Perfluoroalkoxy is a fluorocarbon with chemical and mechanical properties similar to FEP. More rigid than either PTFE or FEP. Commonly used for injection molded parts.

PPS

Polyphenylene sulphide is the generic name for the material produced as Fortron®, Ryton®, and others. It is very resistant to all solvents, acids, and bases.

PTFE

Polytetrafluoroethylene is the generic name for the class of materials such as Teflon®. It offers superior chemical resistance but is limited in pressure and temperature capabilities. Because it's so easy to handle, it is often used in low pressure situations where stainless steel might cause adsorption. PTFE tubing is relatively porous, and compounds of low molecular weight can diffuse through the tubing wall.

PTFE, glass-filled

This form of PTFE is nearly as inert as the virgin but is much more mechanically stable.

Polyimide, graphite

A graphite-filled polyimide. Due to its brittle nature, it is usually used only for reducing ferrules.

Polyimide, virgin

Not recommended for general use due to its tendency to be sticky and brittle at high temperatures. Often used as a high temperature electrical insulator.

Polyimide, Valcon

A high temperature (350°) graphite-reinforced polyimide composite used for all FS and FSR ferrules (fused silica adapters) and many standard ferrules. Valcon polyimide is specially prepared by a process known as Hot Isostatic Pressing (HIP) prior to being machined into individual adapters. This two step process yields a fused silica adapter with high temperature stability far exceeding that of parts produced by molding. It cannot be used with steam or with bases such as strong alkali and aqueous ammonia solutions.

Polypropylene

Widely used polymer for non-wetted parts. Attacked by strong oxidizers, aromatic and chlorinated hydrocarbons.

PVDF

PVDF, polyvinylidene fluoride, has excellent resistance to most mineral and organic acids, aliphatic and aromatic hydrocarbons, and halogenated solvents. Poor resistance to acetone, MEK, THF, and potassium and sodium hydroxide. Often supplied as Kynar®.

A variety of polymeric composites have been developed to meet a variety of customer requirements for rotors, since no single material will perform satisfactorily in all situations. This brief summary of each polymer's particular features and potential drawbacks is provided to allow the user to make a more informed valve selection. Consult our technical specialists for any additional questions.

VICI polymer composites are proprietary formulations: only the generic compound class can be discussed.

The specifications in the following discussions are for two position valves. Multiposition selectors generally have lower pressure and temperature limits due to the more complex seal design. Actual specifications for each valve series are shown on the appropriate pages throughout the valve sections of the catalog. If a valve is to be used at a pressure higher than the given standard, please contact the factory for ordering information.

Valcon E

A polyaryletherketone/PTFE composite, the E material receives wide GC use in what had previously been a problematic gap between the optimum temperature ranges of P and T, and in HPLC applications where the temperature requirement is higher than what can be handled by the H material and where a lower pressure limit can be tolerated. (Standard specs are 400 psi at 225°C, but higher pressure ratings are possible at reduced temperatures.) However, this polymer cannot be used in prolonged contact with high concentrations of sulfuric and nitric acids, DMSO, THF, or liquid methylene chloride.

Valcon E2

A proprietary reinforced TFE composite, Valcon E2 works well at lower pressures and is suitable for temperatures up to 75°C. This material is resistant to most chemicals but should not be used in prolonged contact with high concentrations of sulfuric and nitric acids, DMSO, or liquid methylene chloride.

Valcon E3

This designation indicates a proprietary polyimide blend with chemical properties similar to Valcon T, but with higher compressive strength.

Valcon H

This composite, a carbon fiber reinforced, PTFE-lubricated inert engineering polymer, has long been the standard for typical HPLC applications in which pressures are around 5000 psi and temperatures are not more than 75°C. It is not unusual for these valves to be ordered for use at 7000 psi, and less frequently for use at 10,000 psi. However, at that point the lifetime may be shortened by as much as 50%.

Valcon H is the rotor material used in the W and UW series, where no rotor material letter is added (as: C10W or AC6UW).

Valcon M

This material, basically a hydrocarbon in structure, is the most impermeable to light gases of all the rotor materials currently available, with wide acceptance in low-temperature (50°C maximum) trace gas applications. Avoid use with aromatic hydrocarbons.

Valcon P

This composite, the majority of which is PTFE and carbon, was the standard choice for most GC applications before the development of Valcon E. (Standard specs are 400 psi at 175°C.) Routinely used at 1000 psi, 75°C, it can also be used at temperatures approaching 200°C with decreased sealing tension; however, at that point Valcon E is probably a better choice from a lifetime standpoint. Valcon E can replace P in most applications.

Valcon R

While rarely used today, Valcon R (a PTFE composite) still finds use in low temperature/pressure situations which require its nearly universal chemical inertness. Of the chemicals encountered in commercial practice, only molten sodium and fluorine at elevated temperatures and pressures produce any detrimental effects. Its most severe limitation is that it cannot go over 75°C, even at only 400 psi.

Valcon T

This polyimide/PTFE/carbon composite has been used successfully for many years and still cannot be surpassed when applications demand operating temperatures in the 250°C – 350°C range. (Standard specs for most series are 300 psi at 330°C.) However, at temperatures below 150°C there is a tendency for the seal material to stick to the valve body, making the valve difficult to turn and causing the rotor to crack in extreme cases. Literature provided at the time of purchase contains instructions for reconditioning the material if this condition should arise. The T material is susceptible to attack from steam, ammonia, hydrazines (anhydrous liquids or vapor), primary and secondary amines, and solutions having a pH of 10 or more. Chemical reagents which act as powerful oxidizing agents (nitric acid, nitrogen tetroxide, etc.) must also be avoided. Valcon T can be used in "hot" GPC/SEC applications with O-dichlorobenzene as a solvent.

Valcon TF

This is the series designation for a valve with a virgin PTFE seal. Its mechanical characteristics are poor compared to the other choices, but occasionally its use is dictated by the presence of oxidizing agents too strong even for the R material.

Glossary

A

Adapter: a type of fitting which provides a method of joining two components of differing thread types or systems.

Analytical column: a long narrow tube packed or coated with one of many available chemically diverse compounds that can separate the components in a sample according to their boiling point, polarity, molecular size, or combination thereof. A column of some kind is used with most chromatographic techniques.


B

Backflush: the use of valving to reverse the flow through a column in order to “backflush” or purge heavier components from the column.

Biocompatibility: defines the materials used in a system (i.e. fittings, tubing, and valves) that do not change the bioactivity of the biological substances that come into contact with the surface of these materials. Note that in chromatographic systems, the tubing and column contribute over 99% of the surface area and the valves and fittings are insignificant.

Bore: the diameter of the minimum orifice through the fitting; see **capillary bore**, **through-type bore**, and **large bore**.

Bulkhead fitting: a type of fitting in which the fitting body is inserted through an instrument panel or mounting bracket, to which it is affixed with a mounting nut. The Valco fitting body is uniquely undercut so that it “bites” into the panel when the mounting nut is tightened, eliminating the need for a lock washer.

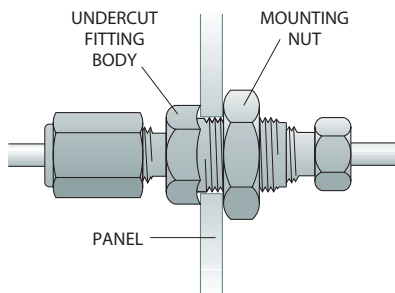


Butt connection: a type of connection in which the two tube ends are directly and squarely in contact, usually effected with a through-type union. Typically used with fused silica connections, or small bore metal tubing.

C

Cap: a cap is used to dead-end a piece of tubing with a nut and ferrule attached.

Capillary bore: the smallest available standard orifice in a given fitting design (usually 0.25 mm). Typically denoted by suffix “C” in the product number.

Closemount hardware: the mounting components providing the most direct, shortest attachment of valve to actuator.

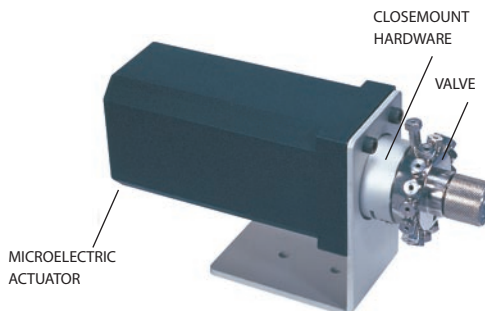

Compression fitting: a style of fitting in which a threaded nut compresses a tapered ferrule onto tubing as the nut is tightened. Valco metal ferrules cut a ring into the tubing wall while polymer types rely on surface compression to form a seal.

Connecting volume: the volume between two or more connections. This may be cleanly swept, thus not contributing to peak distortion, or may be “dead volume” such as that found in fittings with larger bores than the connecting tubing.


Cross: a type of distribution fitting which connects four pieces of tubing, arranging them in the pattern of a cross.

D

Dead volume: (drawing at right) any volume which a component introduces to a system that is not cleanly swept and relies on diffusion to clear the space. See **connecting volume**.

Detail: see **fitting detail**.

Distribution fitting: a generic term for tees, crosses, and manifolds, used to provide multiple access points to “distribute” a gas or liquid through a system. **CAUTION!** Using a distribution fitting in reverse to coalesce multiple streams may create dead volume. Special manifolds are available for this application.

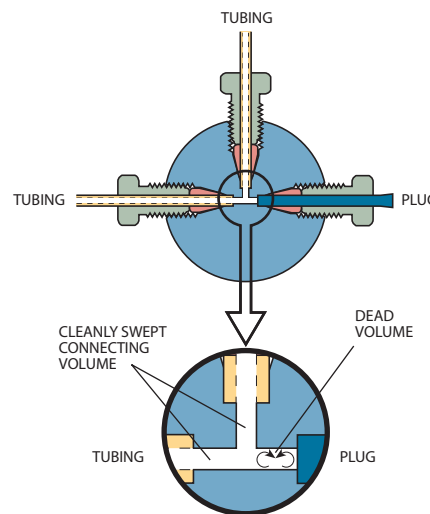


E

External fitting: a type of compression fitting in which the fitting body has male threads; an external *nut* has female threads.



EXTERNAL UNION



EXTERNAL REDUCING UNION

F

FIA: Flow Injection Analysis. A simple and versatile analytical technique for automating wet chemical analyses based on the manipulation of a sample zone formed from the injection of the sample into a continuous stream of fluid used as a carrier.

Ferrule: one of the components of a compression fitting; the conical piece of metal or plastic that compresses onto the tube as it is forced into a tapered seat. Valco metal ferrules are unique in that they attach to and seal at the tube by cutting a shallow ring into it, instead of by actually swaging it. This is preferable since it introduces no flow restriction.

Filter: a type of union or reducing union which traps the particulates in a stream. The filtering element is typically a mesh screen or sintered frit.

Fitting detail: one of the components of a compression fitting; if the tube, nut, and ferrule comprise the male part of the fitting, the fitting detail is the female part. It includes the threads for the nut, the tapered ferrule seat, and the pilot.

Flanged fitting: a type of fitting used with fluoropolymer tubing (PTFE, FEP) in which a flange is made at the tube end. Connections are made at the flange either by compressing the flange into a flat detail (typically 1/4-28 threaded) or by butting two flanges together. A special flanging tool forms the flanges.

Flangeless fitting: similar in application to the flanged fitting, but the flange is not required. A ferrule system is used which grips/compresses the tube. This fitting type can be used with virtually any polymeric tubing since the tube end does not have to be formed, but simply square cut. Typically used in 1/4-28 threaded fittings, it is usually interchangeable with flanged fittings.

Frit: a filter element typically made of stainless, Hastelloy, Titanium, or polymers, usually 0.75 mm or 1 mm thick. Frits may provide better filtration than screens, but because they are thicker there is greater mixing potential, and they typically result in increased pressure drop.

G

GC: Gas Chromatography. An analytical method incorporating an injection system, analytical column, controlled temperature zone, and detector. An inert carrier gas moves the sample through the column, which separates the sample components into discrete bands which are measured as they pass through the detector.

Guard column: a column used in series between the injector and analytical column to prevent certain types of components from entering the analytical column.

H

HPLC: High Performance Liquid Chromatography. An analytical system consisting of an injector, pump, analytical column, and detector. Using a liquid mobile phase, the sample is pumped through the column, where it is separated into discrete sample component bands which are detected and measured as the bands elute from the column.

I

ID: internal diameter.

Inert: technically, unreactive with other substances; however, in the instrumentation field, "inert" is a relative term. Often polymers are termed inert but are soluble in some fluids and can react with some compounds.

Internal fitting: a type of compression fitting in which the fitting body has female threads; an internal *nut* has male threads.



INTERNAL UNION



INTERNAL REDUCING UNION

L

LC: Liquid Chromatography. Any of a variety of low to medium pressure techniques which use a liquid mobile phase as the carrier to move sample. Similar to HPLC.

Large bore: a bore that is larger than the standard for a given fitting; a fitting ordered with a large bore will have a larger flow orifice than the standard or capillary bore fitting of the same design. Denoted by suffix "L" in the product number.

Luer adapter: an adapter that connects a tapered luer fitting (square nib) of a syringe to a tube or tube fitting.

Glossary

M

Make up: the point at which a ferrule, nut, and tube are assembled in the fashion which will effect a leak-free seal. In most compression fittings, that is accomplished by compressing the tube with the small end of the ferrule. With Valco metal ferrules, the ferrule usually makes up on the tube by cutting a shallow ring in it.

Manifold: a type of distribution fitting in which a single source is directed to multiple outlets, or vice versa. *CAUTION!* Using a common distribution fitting in reverse to merge multiple streams may create dead volume. Special manifolds are available for this application.

Microbore column: a liquid chromatography column of narrow bore (typically 2 mm or less) for improved resolution.

N

Nanovolume: nanovolume generally refers to components with bore sizes less than 250 μm (0.010").

NPT: National Pipe Thread; a standardized tapered pipe fitting. See **pipe thread**.


Nut: the tensioning component of a compression fitting. As the threaded nut is tightened into the fitting detail, it pushes the ferrule forward into the tapered ferrule seat, causing it to make up on the tube.

O

OD: outside diameter.

P

Pilot: the tubing which extends beyond the ferrule in a made-up fitting, or the integral portion of a ZRF internal reducing ferrule which extends beyond the ferrule. See also **pilot depth**.

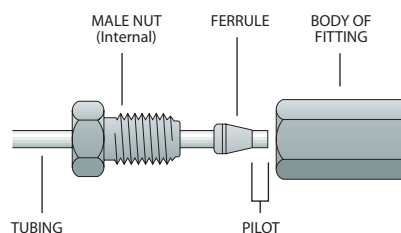

Pilot depth: the length of the tubing diameter cavity beyond the tapered ferrule seat within a fitting detail. Valco fitting pilot depths are tightly controlled to facilitate the interchangeability of components without the risk of leaks or dead volume.

Pipe thread: the external or internal threads of a fitting designed to effect a metal-to-metal seal on the conical thread faces. This type of fitting does not "bottom out" in the detail. Typically used with PTFE tape or other compound to lubricate the threads; however, since the diffusion rate of air components through the PTFE tape is considerable, pipe fittings should not be used in systems where leakage rates are critical.


Port: the connection, orifice, seal, or septum, etc., through which sample may be added (injected) or withdrawn.

R

Reducing ferrule: a ferrule which allows a smaller tube to be used in a fitting detail designed for a larger tube. Caution should be taken if standard reducing ferrules (RF) without integral pilots are used, since dead volume may be created in the fitting pilot depth.

Reducing union: a fitting which joins two tubes of different ODs. The bore of the fitting should typically match the ID of the smaller tube.

Rotor: the internal rotating part of a Valco valve. It contains the engraved slots which connect the ports on the stator or cap.

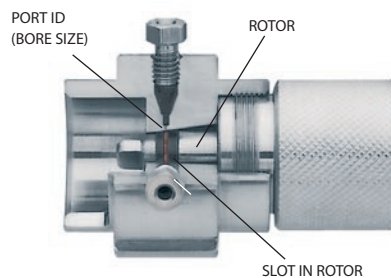

Rotor visible in cutaway valve

S


SFE: Supercritical Fluid Extraction. An extraction technique using a fluid in its supercritical state as the extraction medium. Some liquids and mixtures maintained above a critical temperature and pressure exhibit properties of both the liquid and gas phases of the element. These are defined as supercritical. CO_2 is a common supercritical fluid. Extreme caution must be used with supercritical CO_2 , since uncontrolled expansion (leaks) can be very hazardous due to the substantial stored energy.

SFC: Supercritical Fluid Chromatography. An analytical technique using a supercritical fluid (see SFE) as the mobile phase/carrier.

Screen: a replaceable filter element generally made of Type 316 stainless steel, usually 0.003" thick. Screens clog less frequently than frits, and because they are thinner there is less mixing; however, they are less effective filters.

Sideload: any force on the valve rotor other than the proper rotational force along the axis of the rotor, often resulting in leakage or increased wear. It is typically caused by actuation misalignment, over-rotation, or improper mounting of the valve.

Standard bore: a bore which was chosen as the standard for a particular fitting, typically based on the most common tubing ID used with that fitting.

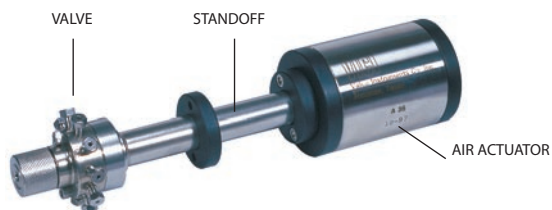

Standoff: an extension between a valve and actuator which allows the valve to be installed in a different temperature zone from the actuator. Standoffs come in several different lengths.

Stator: the stationary component of a valve. Typically, it contains the fittings as well as one of the fluid sealing surfaces. In Valco valves, the stator is called the valve body.

T

Tee: a type of distribution fitting which connects three pieces of tubing, arranging them in the pattern of a "T".

Through-type bore: a bore which is slightly larger than the OD of the tubing which is used with the given fitting. A union with a through-type bore allows the tube ends to butt directly together, or for one tube to run completely through the fitting. Denoted by suffix "T" in the product number. In order to assure correct pilot lengths, we recommend that ferrules be made up on the tubing in a standard union.

U

Union: a fitting for connecting two pieces of tubing of the same OD.

Unswept volume: the volume of any portion of a fitting which is in the flowpath but which is a different diameter than the primary flow orifice through the tubing/fitting assembly, or any area not directly swept by the fluid flow. This can also be known as "dead volume" if it is very poorly swept.

W


Wetted surfaces: the surfaces which are contacted by the sample stream.

Y

Y: a type of distribution fitting which connects three pieces of tubing, arranging them in the pattern of a "Y". Occasionally referred to as a "wye".

Z

Zero dead volume (ZDV): describes a connection which does not add volume to the system beyond what an extension of tubing would in its place.

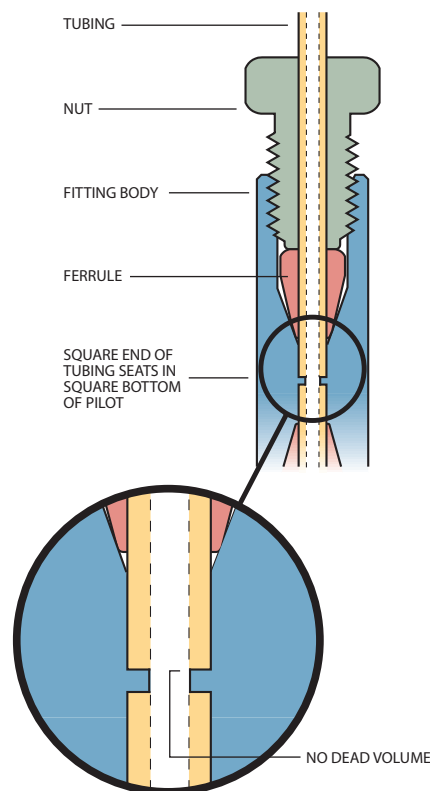

Zero volume: while often used interchangeably with zero dead volume, it ideally describes a fitting design in which there is no internal volume, such as a through-type union designed to butt-fit two pieces of tubing.

GENERAL REFERENCE

Length, Pressure, and Temperature Conversions

PRESSURE CONVERSIONS

psi	KPa	BAR	Atm	psi	KPa	BAR	Atm
1	6.8948	0.06895	0.06805	800	5515.84	55.16	54.44
10	68.948	0.6895	0.6805	825	5688.21	56.88375	56.14125
20	137.896	1.379	1.361	850	5860.58	58.6075	57.8425
30	206.844	2.0685	2.0415	875	6032.95	60.33125	59.54375
40	275.792	2.758	2.722	900	6205.32	62.055	61.245
50	344.74	3.4475	3.4025	925	6377.69	63.77875	62.94625
60	413.688	4.137	4.083	950	6550.06	65.5025	64.6475
70	482.636	4.8265	4.7635	975	6722.43	67.22625	66.34875
80	551.584	5.516	5.444	1000	6894.8	68.95	68.05
90	620.532	6.2055	6.1245	1100	7584.28	75.845	74.855
100	689.48	6.895	6.805	1200	8273.76	82.74	81.66
125	861.85	8.61875	8.50625	1300	8963.24	89.635	88.465
150	1034.22	10.3425	10.2075	1400	9652.72	96.53	95.27
175	1206.59	12.06625	11.90875	1500	10342.2	103.425	102.075
200	1378.96	13.79	13.61	1600	11031.68	110.32	108.88
225	1551.33	15.51375	15.31125	1700	11721.16	117.215	115.685
250	1723.7	17.2375	17.0125	1800	12410.64	124.11	122.49
275	1896.07	18.96125	18.71375	1900	13100.12	131.005	129.295
300	2068.44	20.685	20.415	2000	13789.6	137.9	136.1
325	2240.81	22.40875	22.11625	2500	17237	172.375	170.125
350	2413.18	24.1325	23.8175	3000	20684.4	206.85	204.15
375	2585.55	25.85625	25.51875	3500	24131.8	241.325	238.175
400	2757.92	27.58	27.22	4000	27579.2	275.8	272.2
425	2930.29	29.30375	28.92125	4500	31026.6	310.275	306.225
450	3102.66	31.0275	30.6225	5000	34474	344.75	340.25
475	3275.03	32.75125	32.32375	5500	37921.4	379.225	374.275
500	3447.4	34.475	34.025	6000	41368.8	413.7	408.3
525	3619.77	36.19875	35.72625	6500	44816.2	448.175	442.325
550	3792.14	37.9225	37.4275	7000	48263.6	482.65	476.35
575	3964.51	39.64625	39.12875	7500	51711	517.125	510.375
600	4136.88	41.37	40.83	8000	55158.4	551.6	544.4
625	4309.25	43.09375	42.53125	8500	58605.8	586.075	578.425
650	4481.62	44.8175	44.2325	9000	62053.2	620.55	612.45
675	4653.99	46.54125	45.93375	9500	65500.6	655.025	646.475
700	4826.36	48.265	47.635	10,000	68947.6	689.48	680.46
725	4998.73	49.98875	49.33625	15,000	103,421.4	1,034.21	1,020.69
750	5171.1	51.7125	51.0375	20,000	137,895.1	1,378.95	1,360.9
775	5343.47	53.43625	52.73875	40,000	275,790.3	2,757.9	2,721.84

LENGTH CONVERSIONS

mm	inches
0.12	.005"
0.15	.006"
0.25	.010"
0.40	.016"
0.50	.020"
0.75	.030"
1.0	.040"
1.5	.060"
2.0	.080"
4.6	.180"
6.0	.236"
6.4	.253"
7.0	.276"
10.0	.400"
inches	mm
1/32"	0.8
1/16"	1.6
1/8"	3.2
1/4"	6.4
3/8"	9.5
1/2"	12.7
1"	25.4

TEMPERATURE CONVERSIONS

°C	°F	°C	°F	°C	°F	°C	°F	°C	°F	°C	°F
-40	-40	35	95	110	230	185	365	260	500	335	635
-35	-31	40	104	115	239	190	374	265	509	340	644
-30	-22	45	113	120	248	195	383	270	518	345	653
-25	-13	50	122	125	257	200	392	275	527	350	662
-20	-4	55	131	130	266	205	401	280	536	375	707
-15	5	60	140	135	275	210	410	285	545	400	752
-10	14	65	149	140	284	215	419	290	554	425	797
-5	23	70	158	145	293	220	428	295	563	450	842
0	32	75	167	150	302	225	437	300	572	475	887
5	41	80	176	155	311	230	446	305	581	500	932
10	50	85	185	160	320	235	455	310	590	525	977
15	59	90	194	165	329	240	464	315	599	550	1022
20	68	95	203	170	338	245	473	320	608	575	1067
25	77	100	212	175	347	250	482	325	617	600	1112
30	86	105	221	180	356	255	491	330	626	625	1157
										1000	1832

Patents and Trademarks

PATENTS

Among important US patents held by VICI are the following. Others are pending and may have been granted by the time of publication.

6,575,501	Collapsible bushing
6,247,731	Nut w/ controlled radius
6,511,528	Purification of CO ₂
6,099,619	
5,858,068	
6,074,459	Ultra pure gas process
6,193,213	XL valves
6,030,436	Permeation tube
6,202,698	Diaphragm valve
5,153,519	Pulsed discharge detectors
5,317,271	
5,394,090	
5,394,091	
5,394,092	
5,541,519	
5,532,599	
5,528,150	
5,594,346	
5,767,683	
5,858,068	
6,133,740	
6,842,008	
6,933,771	
7,091,044	
5,234,235	
4,991,883	
5,329,966	Calibrated flow controllers
4,064,908	Combo valves
4,173,363	Internal reducers, filters, external reducers, and precolumns
4,281,679	
4,196,654	Air actuators
4,022,065	HPLC injectors
5,741,126	Pump
7,316,777	No-twist one-piece fitting

TRADEMARKS

Cheminert	Valco Instruments Co. Inc. and VICI AG International
Condyne	VICI Metronics Inc.
Delrin	E.I. duPont de Nemours
Dynacal	VICI Metronics Inc.
Dynacalibrator	VICI Metronics Inc.
Fortron	Celanese
Hamilton	Hamilton
Hastelloy C	Haynes International
HayeSep	Hayes Separations, Inc.
IBM	International Business Machines
Inconel 600	Huntington Alloys, Inc.
Kalrez	DuPont Dow Elastomers
Kel-F	3M Company
Kynar	Elf Atochem North America Inc.
Metronics	VICI Metronics Inc.
Micro-Flo	Valco Instruments Co. Inc.
Mininert	Valco Instruments Co. Inc.
Monel 400	Huntington Alloys, Inc.
Nanovolume	Valco Instruments Co. Inc.
Nickel 200	Huntington Alloys, Inc.
Nitronic	Armco (AK Steel)
Parker	Parker Hannifin co.
Perifit	Valco Instruments Co. Inc.
Pressure-Flo	Valco Instruments Co. Inc.
Pressure-Lok	Valco Instruments Co. Inc.
Ryton	Phillips Petroleum Co.
Swagelok	Crawford Fitting Company
Teflon	E.I. duPont de Nemours
Tefzel	E.I. duPont de Nemours
Tygon	Norton Performance Plastics
ValcoBond	Valco Instruments Co. Inc.
ValcoPLOT	Valco Instruments Co. Inc.
Vespel	E.I. duPont de Nemours
Viton	DuPont Dow Elastomers
VICI	Valco Instruments Co. Inc. and VICI AG International
VICI Jour	Valco Instruments Co. Inc. and VICI AG International
Waters	Waters Associates

Decoding Cheminert Valve Product Numbers



Cheminert valve product numbers all begin with the valve model (C1, C22, C25Z, C72MU, etc.) and a hyphen. Following the valve model are four numbers – as shown at right, the position of each number determines the category of the specification; the number indicates the actual spec.

The final letters indicate actuation. Internal sample injectors also include the sample size. (Keep in mind that some combinations are not possible, so check with sales for your actual requirements.)

NOTE!

This chart is for decoding existing product numbers, **not** for inventing new ones. Some options can not work with certain valve types and designs!

VALVE TYPE		
1. Required.		
Nanovolume injectors		
C72MH	NEW 10k psi	UHPLC injector, 360 µl fittings
C72MX	NEW 15k psi	UHPLC injector, 360 µl fittings
C72MU	NEW 20k psi	UHPLC injector, 360 µl fittings
C72NH	NEW 10k psi	UHPLC injector, 1/32" fittings
C72NX	NEW 15k psi	UHPLC injector, 1/32" fittings
C72NU	NEW 20k psi	UHPLC injector, 1/32" fittings
C74NX	NEW 15 psi	UHPLC internal sample injector, 1/32" fittings
CN2	5k psi	HPLC injector, 1/32" fittings
CN4	5k psi	HPLC internal sample injector, 1/32" fittings
UHPLC and HPLC injectors		
C72H	NEW 10k psi	UHPLC microbore injector
C72X	NEW 15k psi	UHPLC microbore injector
C72U	NEW 20k psi	UHPLC microbore injector
C74H	NEW 10k psi	UHPLC internal sample injector
C74X	NEW 15k psi	UHPLC internal sample injector
C1	5k psi	Through-the-handle injector
C1CF	5k psi	Continuous flow through-the-handle injector
C2	5k psi	Microbore/analytical valve
C4	5k psi	Internal sample injector
C6	5k psi	Continuous flow injector
Low pressure injectors		
C22Z		Injector with Valco ZDV fittings
C22		Injector with 1/4-28 fittings
C24Z		Internal sample injector, Valco ZDV fittings
C24		Internal sample injector, 1/4-28 fittings
Nanovolume selectors		
C75NH	NEW 10k psi	UHPLC selector, 1/32" fittings
C75NX	NEW 15k psi	UHPLC selector, 1/32" fittings
C75NU	NEW 20k psi	UHPLC selector, 1/32" fittings
C75H	NEW 10k psi	UHPLC selector, 1/16" fittings
C75X	NEW 15k psi	UHPLC selector, 1/16" fittings
C75U	NEW 20k psi	UHPLC selector, 1/16" fittings
Selectors		
C5	5k psi	HPLC stream selector
C25Z		Low pressure stream selector, Valco ZDV fittings
C25		Low pressure stream selector, 1/4-28 fittings
C35Z		Low pressure stream selector, Valco ZDV fittings
C45		Low pressure stream selector, 1/2-20 fittings
OEM injectors		
C2V	5k psi	Vertical port injector
C3	5k psi	Centered port injector
C52	NEW 5k psi	HPLC integrated motor/valve
C52V	NEW 5k psi	HPLC integrated motor/valve with vertical port injector
C62Z	NEW	Low pressure integrated motor/valve, Valco ZDV fittings
C62	NEW	Low pressure integrated motor/valve, 1/4-28 fittings
OEM selectors		
C55	NEW 5k psi	HPLC integrated motor/valve selector
C65Z	NEW	Low pressure integrated motor/valve selector, Valco ZDV fittings
C65	NEW	Low pressure integrated motor/valve selector, 1/4-28 fittings

(HYPHEN)
2. Required.
Place a hyphen after the Cheminert valve type.

Decoding Cheminert Valve Product Numbers

Examples:

C1 - 1 3 4 6

C1-1346: C1 through-the-handle injector, 0.25 mm ports, Valcon E rotor, PAEK stator, 6 ports, manual (blank = manual)

C5 - 2 0 0 6 EMH

C5-2006EMH: C5 stream selector, 0.40 mm ports, Valcon H rotor, Nitronic 60 stator, 6 positions, microelectric actuator

C22Z - 3 1 8 0 EH

C22Z-3180EH: C22Z low pressure injector with ZDV fittings, 0.75 mm ports, Valcon E2 rotor, PPS stator, 10 ports, microelectric actuator

C74NX - 6 6 9 4 -.01 E

C74NX-6694-.01E: C74NX UHPLC nanovolume internal sample injector, 150 micron ports (.006"), Valcon E3 rotor, coated stainless stator, 4 ports, 10 nl internal sample size, standard electric actuator

PORT SIZE	ROTOR MATERIAL	STATOR MATERIAL	PORTS / POSITIONS	INTERNAL SAMPLE SIZE	ACTUATOR
3. Required.	4. Required.	5. Required.	6. Required.	7. Optional. For internal sample inj.	8. Required.
0 0.15 mm (.006") 1 0.25 mm (.010") 2 50 µm (.002")* or 0.40 mm (.016") 3 0.75 mm (.030") 4 100 µm (.004")* or 1.00 mm (.040") 5 1.25 mm (.050") 6 150 µm (.006")* or 1.50 mm (.060") 7 2.00 mm (.080") 8 3.18 mm (.125") 9 4.60 mm (.180") * for nanovolume valves	0 Valcon H 1 Valcon E2 2 Valcon T 3 Valcon E 4 Valcon M 5 [not used] 6 Valcon E3 7 Valcon TF 8 Valcon P	0 Nitronic 60 1 CTFE 2 Hastelloy C ** 3 Titanium ** 4 PAEK 5 Valcon E4 6 [not used] 7 PVDF 8 PPS 9 Coated stainless ** These stator materials are coated when in a C72 / C74 / C75 series valve	Ports (Two position) 4 4 6 6 8 8 0 10 Positions (Selectors) 4 4 6 6 8 8 0 10 14 14 20 20 24 24 26 26	.004 0.004 µl (4 nl) .01 0.01 µl (10 nl) .02 0.02 µl (20 nl) .05 0.05 µl (50 nl) .1 0.1 µl .2 0.2 µl .5 0.5 µl 1 1.0 µl 2 2.0 µl Put a hyphen (-) before the sample size in the product number.	A Air E Standard electric Microelectric, two position EQ • highest speed EH • high speed EP • medium torque ED • high torque ET • highest torque Microelectric, for selectors EMH • high speed EMT • high torque [blank] Manual D Driver only (for use with existing actuator)

NOTE!

This chart is for decoding existing product numbers, **not** for inventing new ones. Some options can not work with certain valve types and designs!

Decoding Valco Two Position Valve Product Numbers



The simplest way to determine a **Valco two position valve** product number is to call our sales department and discuss the features you require. But if you want to decipher an existing product number, refer to this chart and the examples on the facing page for guidelines. (Keep in mind that some combinations are not possible, so check with sales for your actual requirements.)

Every letter and number has a meaning in its proper order and sequence. The shaded columns indicate codes that are required in every product number, and the non-shaded columns offer possibilities of optional features.

NOTE!

This chart is for decoding existing product numbers, **not** for inventing new ones. Some options can not work with certain valve types and designs!

ACTUATOR	STANDOFF ASSEMBLY LENGTH	BORE SIZE	FITTINGS SIZE	INTERNAL SAMPLE INJECTOR
<p>1. Required. Valve is shipped with manual knob unless specified otherwise.</p> <p>A Air (0-70°C) AT Air (50-150°C) E Standard electric Microelectric EH • high speed EP • medium torque ED • high torque ET • highest torque [blank] Manual D Driver only (for use with existing actuator)</p>	<p>2. Optional. Specify if required.</p> <p>2 2" standoff 3 3" standoff 4 4" standoff 6 6" standoff</p>	<p>3. Optional. For standard bore, leave blank.</p> <p>[blank] Standard bore L Large bore</p>	<p>4. Required. For 1/8" fittings, leave blank.</p> <p>N 1/32" C 1/16" [blank] 1/8" VL 1/4"</p>	<p>5. Optional. Requires 4 ports. Also specify sample size (9).</p> <p>I</p>

Decoding Valco Two Position Valve Product Numbers

Examples:

4 N 8 W T

4N8WT: Manual (blank = manual), 4" standoff, standard bore, 1/32" valve, 8 ports, W type, Valcon T rotor, standard Nitronic 60 body

EH C I 4 W E .1

EHCI4WE.1: Microelectric actuator, no standoff assembly, standard bore, 1/16" valve, internal sample, 4 ports, W type, Valcon E rotor, standard N60 body, 0.1 µl sample

A 3 6 UW P HC

A36UWPHC: Air actuator, 3" standoff, standard bore, 1/8" (blank = 1/8"), 6 ports, UW type, Valcon P rotor, Hastelloy C body material

E 2 L 6 UW P

E2L6UWP: Standard electric actuator, 2" standoff, large bore (.067" instead of .030"), 1/8" (blank = 1/8"), 6 ports, UW type, Valcon P rotor, standard Nitronic 60 body

NUMBER OF PORTS	VALVE TYPE	ROTOR MATERIAL	SPECIAL BODY MATERIAL	INTERNAL SAMPLE SIZE
6. Required.	7. Required.	8. Required.	9. Optional. Body material is Nitronic 60 SS unless specified otherwise.	10. Optional. Also specify "I" at Item 5.
3	W	[blank] Valcon H	S6 Type 316 SS	.06 0.06 µl
4	UW	E Valcon E	HC Hastelloy C	.1 0.1 µl
6	MW	E2 Valcon E2	IN Inconel 600	.2 0.2 µl
8		M Valcon M	M4 Monel 400	.5 0.5 µl
10		P Valcon P	NI Nickel 200	1 1.0 µl
12		R Valcon R	N5 Nitronic 50	2 2.0 µl
14		T Valcon T	TI Titanium	Put a hyphen (-) before the sample size in the product number.
		TF Valcon TF		

NOTE!

This chart is for decoding existing product numbers, **not** for inventing new ones. Some options can not work with certain valve types and designs!

Decoding Valco Selector Product Numbers



Product numbers for **Valco selectors**, like those for two position valves, are composed of letters and numbers which have their meaning based on the position in the product number. The simplest way to determine a Valco valve product number is to call our sales department and discuss the features you require. The chart below and the examples opposite may help decode the product number you have,

or direct you toward all the features you must specify for a selector. (Keep in mind that some combinations are not possible, so check with sales for your actual requirements.)

The shaded columns indicate codes that are required in every product number, and the non-shaded columns offer possibilities of optional features.

NOTE!

This chart is for decoding existing product numbers, **not** for inventing new ones. Some options can not work with certain valve types and designs!

ACTUATOR	STANDOFF ASSEMBLY LENGTH	BORE SIZE	FITTINGS SIZE	FLOWPATH
<p>1. Required. Valve is shipped with manual knob unless specified otherwise.</p> <p>A Air (0-70°C) AH Air, high torque AT Air (50-150°C)</p> <p>E Standard electric Microelectric EMH • high speed EMT • high torque</p> <p>[blank] Manual</p> <p>D Driver only (for use with existing actuator)</p>	<p>2. Optional. Specify if required.</p> <p>2 2" standoff 3 3" standoff 4 4" standoff 6 6" standoff</p>	<p>3. Optional. For standard bore, leave blank.</p> <p>[blank] Standard bore L Large bore</p>	<p>4. Required. For 1/8" fittings, leave blank.</p> <p>C 1/16" [blank] 1/8" VL 1/4"</p>	<p>5. Required.</p> <p>SD SC SF ST STF</p>

Decoding Valco Selector Product Numbers

Examples:

A 2 VL SC 6 MW E2

A2VLSC6MWE2: Air actuated, 2" standoff, 1/4" valve, SC flowpath, 6 positions, MW type, Valcon E2 rotor, standard Nitronic 60 body

EMT 4 C SD 4 UW

EMT4CSD4UW: Microelectric actuator, 4" standoff, 1/16" valve, SD flowpath, 4 positions, UW type, Valco H (blank = H) rotor, standard N60 body

E 3 ST 10 MW T HC

E3ST10MW5HC: Standard electric actuator, 3" standoff, 1/8" (blank = 1/8") valve, ST flowpath, 10 positions, MW type, Valcon T rotor, Hastelloy C body

NUMBER OF POSITIONS	VALVE TYPE	ROTOR MATERIAL	SPECIAL BODY MATERIAL
6. Required.	7. Required.	8. Required.	9. Optional. Body material is Nitronic 60 SS unless specified otherwise.
4	MW Low pressure	[blank] Valcon H	S6 Type 316 SS
6	UW high pressure	E Valcon E	HC Hastelloy C
8		E2 Valcon E2	IN Inconel 600
10		M Valcon M	M4 Monel 400
12		P Valcon P	NI Nickel 200
16		R Valcon R	N5 Nitronic 50
		T Valcon T	TI Titanium
		TF Valcon TF	

NOTE!

This chart is for decoding existing product numbers, **not** for inventing new ones. Some options can not work with certain valve types and designs!

INDEX BY PRODUCT NUMBER

.5FR.5-5 — C-1C40H

.5FR.5-5	60	2FR4-10	45	4C4WT	108	A2CSF16MWE	126	A4C6WT	108	ASFV	213
.5FR1-10	53	2FR4-10	53	4C6UWE	107	A2CSF6MWE	126	A4C8UWE	107	ASFV2HT	213
.5FR1HC-10	45, 53	2FR4HC-10	45	4C6UWT	109	A2CST10MWE	128	A4C8UWT	109	ASFV2HT4	213
.5FR2-10	45, 53	2FR4HC-10	53	4C6WE	106	A2CST12MWE	128	A4C8WE	106	ASFV40K.5	85
.5FR4-10	45, 53	2FR4TI-10	45	4C6WT	108	A2CST16MWE	128	A4C8WT	108	ASFV40K1	85
.5SR.5-10	53	2FR4TI-10	53	4C8UWE	107	A2CST6MWE	128	A4N10WE	104	ASFVHT	213
.5SR1-10	53	2FR6	45	4C8UWT	109	A2CSTF10MWE	130	A4N10WT	105	ASFVHT4	213
.5SR2-10	53	2FR6HC	45	4C8WE	106	A2CSTF12MWE	130	A4N4WE	104	ASFVL	213
.5SR4-10	53	2FR6TI	45	4C8WT	108	A2CSTF16MWE	130	A4N4WT	105	ASFVLHT	213
10FR1-10	45, 53	2FR8	45	4N10WE	104	A2CSTF6MWE	130	A4N6WE	104	ASFVLHT4	213
10FR2-10	45, 53	2FR8HC	45	4N10WT	105	A2I4UWE.2	103	A4N6WT	105	ASFVO	213
10FR4-10	45, 53	2FR8TI	45	4N4WE	104	A2I4UWE.5	103	A4N8WE	104	ASFVO2HT	213
10FR4HC-10	45, 53	2I4UWE.2	103	4N4WT	105	A2I4UWE1	103	A4N8WT	105	ASFVO2HT4	213
10SR.5-10	53	2I4UWE.5	103	4N6WE	104	A2I4UWE2	103	A4S	194	ASFVOHT	213
10SR1-10	53	2I4UWE1	103	4N6WT	105	A2NI4WE.06	102	A4UW	115	ASFVOHT4	213
10SR2-10	53	2I4UWE2	103	4N8WE	104	A2NI4WE.1	102	A4VL4MWE2	110	ASFVOL	213
10SR4-10	53	2L10UW	116	4N8WT	105	A2NI4WE.2	102	A4VL6MWE2	110	ASFVOLHT	213
1SR.5-10	53	2NI4WE.06	102	4SOA	205	A2NI4WE.5	102	A4VL8MWE2	110	ASFVOLHT4	213
1SR1-10	53	2NI4WE.1	102	4SOAMP	205	A2SC10MWE	125	A6	194	AT10	194
1SR2-10	53	2NI4WE.2	102	4SOUTH	205	A2SC12MWE	125	A60	195	AT104	194
1SR4-10	53	2NI4WE.5	102	4SOUTHMP	205	A2SC16MWE	125	A604	195	AT105	194
210UW	115	2RAD	204	4SOWK	205	A2SC6MWE	125	A60S	195	AT12	194
2310-10	233	2SC10MWE	125	4SOWKMP	205	A2SD10MWE	123	A62	194	AT124	194
2310-20	233	2SC12MWE	125	4UW	115	A2SD12MWE	123	A6S	194	AT125	194
2330-10	233	2SC16MWE	125	4UWE	110	A2SD16MWE	123	A6UW	115	AT16	194
2330-20	233	2SC6MWE	125	4VL4MWE2	110	A2SD6MWE	123	A8	194	AT164	194
2CI4UWE.2	103	2SD10MWE	123	4VL6MWE2	110	A2SF10MWE	127	A82	194	AT16S	194
2CI4UWE.5	103	2SD12MWE	123	4VL8MWE2	110	A2SF12MWE	127	A8S	194	AT165	194
2CI4UWE1	103	2SD16MWE	123	660100	248	A2SF16MWE	127	A8UW	115	AT130	195
2CI4UWE2	103	2SD6MWE	123	660110	248	A2SF6MWE	127	A90	195	AT302	195
2CI4WE.06	102	2SF10MWE	127	660200	248	A2ST10MWE	129	A904	195	AT305	195
2CI4WE.1	102	2SF12MWE	127	660210	248	A2ST12MWE	129	A90S	195	AT362	195
2CI4WE.2	102	2SF16MWE	127	660300	248	A2ST16MWE	129	AC10UW	114	AT362	195
2CI4WE.5	102	2SF6MWE	127	660310	248	A2ST6MWE	129	AC10W	113	AT36S	195
2CSC10MWE	124	2SOA	205	660320	248	A2STF10MWE	131	AC4UW	114	AT4	194
2CSC12MWE	124	2SOAMMP	205	6UW	115	A2STF12MWE	131	AC4W	113	AT44	194
2CSC16MWE	124	2SOAMP	205	6UWE	110	A2STF16MWE	131	AC6UW	114	AT45	195
2CSC6MWE	124	2SR.5-10	53	8UW	115	A2STF6MWE	131	AC6W	113	AT452	195
2CSD10MWE	122	2SR1-10	53	8UWE	110	A2VLC8MWE2	125	AC8UW	114	AT45S	195
2CSD12MWE	122	2SR2-10	53	A		A30	195	AC8W	113	AT4S	194
2CSD16MWE	122	2SR4-10	53	A10	194	A304	195	AC14UW.2	112	AT6	194
2CSD6MWE	122	2ST10MWE	129	A102	194	A30S	195	AC14UW.5	112	AT60	195
2CSF10MWE	126	2ST12MWE	129	A10S	194	A36	195	AC14UW1	112	AT602	195
2CSF12MWE	126	2ST16MWE	129	A10UW	115	A364	195	AC14UW2	112	AT60S	195
2CSF16MWE	126	2ST6MWE	129	A12	194	A36S	195	AC14W.06	112	AT64	194
2CSF6MWE	126	2STF10MWE	131	A122	194	A4	194	AC14W.1	112	AT6S	194
2CST10MWE	128	2STF12MWE	131	A12S	194	A410UWE	110	AC14W.2	112	AT8	194
2CST12MWE	128	2STF16MWE	131	A16	194	A410UWT	111	AC14W.5	112	AT84	194
2CST16MWE	128	2STF6MWE	131	A162	194	A42	194	ACSD10UW	132	AT8S	194
2CST6MWE	128	410UWE	110	A16S	194	A44UWE	110	ACSD14UW	132	AT90	195
2CSTF10MWE	130	410UWT	111	A2CI4UWE.2	103	A44UWT	111	ACSD4UW	132	AT902	195
2CSTF12MWE	130	41E1-120VAC	198	A2CI4UWE.5	103	A45	195	ACSD6UW	132	AT90S	195
2CSTF16MWE	130	41E1-12VDC	198	A2CI4UWE1	103	A454	195	ACST4UW	133	B	
2CSTF6MWE	130	41E1-220VAC	198	A2CI4UWE2	103	A45S	195	ACST6UW	133	BNV1	218
2FR1-10	45	41E1-24VAC	198	A2CI4WE.06	102	A46UWE	110	AH2VLS4MWE2	125	BNV1-D	218
2FR1-10	53	44UWE	110	A2CI4WE.1	102	A46UWT	111	AH2VLS6MWE2	125	BNV1-KZ	218
2FR1HC-10	45	44UWT	111	A2CI4WE.2	102	A48UWE	110	AH2VLS8MWE2	123	BNV1LF	218
2FR1HC-10	53	46UWE	110	A2CI4WE.5	102	A48UWT	111	AH2VLS10MWE2	123	BNV1LF-D	218
2FR1K	45	46UWT	111	A2CSC10MWE	124	A4C10UWE	107	AH2VLS12MWE2	123	BNV1LF-KZ	218
2FR1KHC	45	48UWE	110	A2CSC12MWE	124	A4C10UWT	109	AH2VLS14MWE2	127	C	
2FR1KTI	45	48UWT	111	A2CSC16MWE	124	A4C10W	106	AH2VLS16MWE2	127	C-1C00H	158
2FR1TI-10	45	4C10UWE	107	A2CSC6MWE	124	A4C10WT	108	AH2VLS18MWE2	127	C-1C04	158
2FR1TI-10	53	4C10UWT	109	A2CSD10MWE	122	A4C4UWE	107	AH2VLS20MWE2	126	C-1C06	158, 160
2FR2-10	45	4C10WE	106	A2CSD12MWE	122	A4C4UWT	109	AH2VLS22MWE2	127	C-1C08H	158
2FR2-10	53	4C10WT	108	A2CSD16MWE	122	A4C4WE	106	AH2VLS24MWE2	127	C-1C30H	158
2FR2HC-10	45	4C4UWE	107	A2CSD6MWE	122	A4C4WT	108	AH2VLS26MWE2	123	C-1C34	158
2FR2HC-10	53	4C4UWT	109	A2CSF10MWE	126	A4C6UWE	107	AH2VLS28MWE2	123	C-1C36	158
2FR2TI-10	45	4C4WE	106	A2CSF12MWE	126	A4C6UWT	109	AH2VLS30MWE2	127	C-1C38H	158
2FR2TI-10	53					A4C6WE	106	AH2VLS32MWE2	127	C-1C40H	158

C-1C44.....	158	C-NTXFPK.....	60	C2-1346E.....	158	C22-384.....	165	C24-2184-1EH.....	167	C25-6188.....	175
C-1C46.....	158, 160	C-NVISF.....	60	C2-1346EH.....	158	C22-386.....	165	C24-2184-2.....	167	C25-6188A.....	175
C-1C46.....	160	C-NXFFPK.....	60	C2-13ROH.....	158, 178	C22-388.....	165	C24-2184-2A.....	167	C25-6188D.....	175
C-1C48H.....	158	C-NXXFPK.....	60	C2-13R4.....	158, 178	C22-610.....	165	C24-2184-2D.....	167	C25-6188E.....	175
C-261.....	160, 163	C-NYFFPK.....	60	C2-13R6.....	158, 160, 179	C22-614.....	165	C24-2184-2E.....	167	C25-6188EMH.....	175
C-2C000H.....	161	C-NYXFPK.....	60	C2-13R8H.....	158, 178	C22-616.....	165	C24-2184-2EH.....	167	C25-680.....	175
C-2C04.....	161	C-PF.....	78	C2-2004.....	161	C22-618.....	165	C24Z-1C8.....	166	C25-684.....	175
C-2C06.....	161, 163	C-PFL.....	78	C2-2004A.....	161	C22-6180.....	165	C24Z-2184-2.....	166	C25-686.....	175
C-2C08H.....	161	C-PFM.....	78	C2-2004D.....	161	C22-6180A.....	165	C24Z-2184-2A.....	166	C25-688.....	175
C-2C30H.....	161	C-PFS.....	78	C2-2004E.....	161	C22-6180D.....	165	C24Z-2184-2D.....	166	C25Z-3180.....	174
C-2C34.....	161	C-VISF-1.....	40	C2-2004EH.....	161	C22-6180E.....	165	C24Z-2184-2E.....	166	C25Z-3180A.....	174
C-2C36.....	161	C-VISF-1H.....	40	C2-2006.....	161	C22-6180EH.....	165	C24Z-2184-2EH.....	166	C25Z-3180D.....	174
C-2C38H.....	161	C-ZP1FPK.....	64	C2-2006A.....	161	C22-6184.....	165	C24Z-2184-5.....	166	C25Z-3180E.....	174
C-2C40H.....	161	C1-1006.....	160	C2-2006D.....	161	C22-6184A.....	165	C24Z-2184-5A.....	166	C25Z-3180EMH.....	174
C-2C44.....	161	C1-10R6.....	160	C2-2006E.....	161	C22-6184D.....	165	C24Z-2184-5D.....	166	C25Z-31814.....	174
C-2C46.....	161, 163	C1-1346.....	160	C2-2006EH.....	161	C22-6184E.....	165	C24Z-2184-5E.....	166	C25Z-31814A.....	174
C-2C48H.....	161	C1-2006.....	163	C2-2034.....	161	C22-6184EH.....	165	C24Z-2184-5EH.....	166	C25Z-31814D.....	174
C-BOT16.....	81	C1-20R6.....	163	C2-2034A.....	161	C22-6186.....	165	C24Z-2184-1.....	166	C25Z-31814E.....	174
C-BOT32.....	81	C1-2346.....	163	C2-2034D.....	161	C22-6186A.....	165	C24Z-2184-1A.....	166	C25Z-31814EMH.....	174
C-EN.5FPKB.....	59	C1-23R6.....	163	C2-2034E.....	161	C22-6186D.....	165	C24Z-2184-1D.....	166	C25Z-3186.....	174
C-F1.5TI.....	78	C10UW.....	114	C2-2034EH.....	161	C22-6186E.....	165	C24Z-2184-1E.....	166	C25Z-3186A.....	174
C-LFP.....	41	C10UWE.....	107	C2-2036.....	161	C22-6186EH.....	165	C24Z-2184-1EH.....	166	C25Z-3186D.....	174
C-LZP1PK.....	64	C10W.....	113	C2-2036A.....	161	C22-6188.....	165	C25-310.....	175	C25Z-3186E.....	174
C-MPFT110.....	80	C10WE.....	106	C2-2036D.....	161	C22-6188A.....	165	C25-314.....	175	C25Z-3186EMH.....	174
C-MPFT12.....	80	C12-310.....	164	C2-2036E.....	161	C22-6188D.....	165	C25-316.....	175	C25Z-3188.....	174
C-MPR2.....	81	C12-314.....	164	C2-2036EH.....	161	C22-6188E.....	165	C25-318.....	175	C25Z-3188A.....	174
C-MPR3.....	81	C12-316.....	164	C2-20R0H.....	161, 180	C22-6188EH.....	165	C25-3180.....	175	C25Z-3188D.....	174
C-MZP1PK.....	64	C12-318.....	164	C2-20R4.....	161, 180	C22-680.....	165	C25-3180A.....	175	C25Z-3188E.....	174
C-NEF.5FPK.15S1.....	62	C15-310.....	174	C2-20R6.....	161, 163, 181	C22-684.....	165	C25-3180D.....	175	C25Z-3188EMH.....	174
C-NEF.5FPK.20S1.....	62	C1CF-1006.....	160	C2-20R8H.....	161, 180	C22-686.....	165	C25-3180E.....	175	C25Z-380.....	174
C-NEF.5FPK.25S1.....	62	C1CF-10R6.....	160	C2-2344.....	161	C22-688.....	165	C25-3180EMH.....	175	C25Z-38-14.....	174
C-NEF.5FPK.30S1.....	62	C1CF-1346.....	160	C2-2344A.....	161	C22Z-3180.....	164	C25-3184.....	175	C25Z-386.....	174
C-NEF.5FPK.35S1.....	62	C1CF-13R6.....	160	C2-2344D.....	161	C22Z-3180A.....	164	C25-3184A.....	175	C25Z-388.....	174
C-NEF.5XFPK.15S1.....	62	C1CF-2006.....	163	C2-2344E.....	161	C22Z-3180D.....	164	C25-3184D.....	175	C2H-1000.....	158
C-NEF.5XFPK.20S1.....	62	C1CF-20R6.....	163	C2-2344EH.....	161	C22Z-3180E.....	164	C25-3184E.....	175	C2H-1000A.....	158
C-NEF.5XFPK.25S1.....	62	C1CF-2346.....	163	C2-2346.....	161	C22Z-3180EH.....	164	C25-3184EMH.....	175	C2H-1000D.....	158
C-NEF.5XFPK.30S1.....	62	C1CF-23R6.....	163	C2-2346A.....	161	C22Z-3184.....	164	C25-3186.....	175	C2H-1000E.....	158
C-NEF.5XFPK.35S1.....	62	C2-1004.....	158	C2-2346D.....	161	C22Z-3184A.....	164	C25-3186A.....	175	C2H-1000EH.....	158
C-NEU.5FPK.....	60	C2-1004A.....	158	C2-2346E.....	161	C22Z-3184D.....	164	C25-3186D.....	175	C2H-1008.....	158
C-NEU.5FPK.15.....	61	C2-1004D.....	158	C2-2346EH.....	161	C22Z-3184E.....	164	C25-3186E.....	175	C2H-1008A.....	158
C-NEU.5FPK.20.....	61	C2-1004E.....	158	C2-23R0H.....	161, 180	C22Z-3184EH.....	164	C25-3186EMH.....	175	C2H-1008D.....	158
C-NEU.5FPK.25.....	61	C2-1004EH.....	158	C2-23R4.....	161, 180	C22Z-3186.....	164	C25-3188.....	175	C2H-1008E.....	158
C-NEU.5FPK.30.....	61	C2-1006.....	158	C2-23R6.....	161, 163, 181	C22Z-3186A.....	164	C25-3188A.....	175	C2H-1008EH.....	158
C-NEU.5FPK.35.....	61	C2-1006A.....	158	C2-23R8H.....	161, 180	C22Z-3186D.....	164	C25-3188D.....	175	C2H-1030.....	158
C-NEU.5XFPK.....	60	C2-1006D.....	158	C22-310.....	165	C22Z-3186E.....	164	C25-3188E.....	175	C2H-1030A.....	158
C-NEU.5XFPK.15.....	61	C2-1006E.....	158	C22-314.....	165	C22Z-3186EH.....	164	C25-3188EMH.....	175	C2H-1030D.....	158
C-NEU.5XFPK.20.....	61	C2-1006EH.....	158	C22-316.....	165	C22Z-3188.....	164	C25-380.....	175	C2H-1030E.....	158
C-NEU.5XFPK.25.....	61	C2-1034.....	158	C22-318.....	165	C22Z-3188A.....	164	C25-384.....	175	C2H-1030EH.....	158
C-NEU.5XFPK.30.....	61	C2-1034A.....	158	C22-3180.....	165	C22Z-3188D.....	164	C25-386.....	175	C2H-1038.....	158
C-NEU.5XFPK.35.....	61	C2-1034D.....	158	C22-3180A.....	165	C22Z-3188E.....	164	C25-388.....	175	C2H-1038A.....	158
C-NL.15L-5.....	61	C2-1034E.....	158	C22-3180D.....	165	C22Z-3188EH.....	164	C25-610.....	175	C2H-1038D.....	158
C-NL.15S-5.....	61	C2-1034EH.....	158	C22-3180E.....	165	C22Z-380.....	164	C25-614.....	175	C2H-1038E.....	158
C-NL.20L-5.....	61	C2-1036.....	158	C22-3180EH.....	165	C22Z-384.....	164	C25-616.....	175	C2H-1038EH.....	158
C-NL.20S-5.....	61	C2-1036A.....	158	C22-3184.....	165	C22Z-386.....	164	C25-618.....	175	C2H-1340.....	158
C-NL.25L-5.....	61	C2-1036D.....	158	C22-3184A.....	165	C22Z-388.....	164	C25-6180.....	175	C2H-1340A.....	158
C-NL.25S-5.....	61	C2-1036E.....	158	C22-3184D.....	165	C24-10R-2.....	166	C25-6180A.....	175	C2H-1340D.....	158
C-NL.30L-5.....	61	C2-1036EH.....	158	C22-3184E.....	165	C24-10R-5.....	166, 167	C25-6180D.....	175	C2H-1340E.....	158
C-NL.30S-5.....	61	C2-10R0H.....	158, 178	C22-3184EH.....	165	C24-10R-1.....	166, 167	C25-6180E.....	175	C2H-1340EH.....	158
C-NL.35L-5.....	61	C2-10R4.....	158	C22-3186.....	165	C24-10R-2.....	167	C25-6180EMH.....	175	C2H-1348.....	158
C-NL.35S-5.....	61	C2-10R6.....	158, 160, 179	C22-3186A.....	165	C24-1C8.....	167	C25-6184.....	175	C2H-1348A.....	158
C-NLS1.15.....	62	C2-10R8H.....	158, 178	C22-3186D.....	165	C24-2184-5.....	167	C25-6184A.....	175	C2H-1348D.....	158
C-NLS1.20.....	62	C2-1344.....	158	C22-3186E.....	165	C24-2184-5A.....	167	C25-6184D.....	175	C2H-1348E.....	158
C-NLS1.25.....	62	C2-1344A.....	158	C22-3186EH.....	165	C24-2184-5D.....	167	C25-6184E.....	175	C2H-1348EH.....	158
C-NLS1.30.....	62	C2-1344D.....	158	C22-3188.....	165	C24-2184-5E.....	167	C25-6184EMH.....	175	C2H-2000.....	161
C-NLS1.35.....	62	C2-1344E.....	158	C22-3188A.....	165	C24-2184-5EH.....	167	C25-6186.....	175	C2H-2000A.....	161
C-NNFFPK.....	59	C2-1344EH.....	158	C22-3188D.....	165	C24-2184-1.....	167	C25-6186A.....	175	C2H-2000D.....	161
C-NNFLFPK.....	59	C2-1346.....	158	C22-3188E.....	165	C24-2184-1A.....	167	C25-6186D.....	175	C2H-2000E.....	161
C-NPFPK.....	59	C2-1346A.....	158	C22-3188EH.....	165	C24-2184-1D.....	167	C25-6186E.....	175	C2H-2000EH.....	161
C-NTFPK.....	60	C2-1346D.....	158	C22-380.....	165	C24-2184-1E.....	167	C25-6186EMH.....	175	C2H-2008.....	161

INDEX BY PRODUCT NUMBER

C2H-2008A — C6-1006

C2H-2008A.....	161	C3-2346EH.....	181	C4-0344-01EH.....	159	C4-1C4.....	162	C5-2C48H.....	172	C55-2004I.....	184
C2H-2008D.....	161	C3-2C06.....	181	C4-0344-02.....	159	C45-9784A.....	177	C5-2C48H.....	173	C55-2004I-S.....	184
C2H-2008E.....	161	C3-2C46.....	181	C4-0344-02A.....	159	C45-9784D.....	177	C52-1000I.....	178	C55-2004IX.....	184
C2H-2008EH.....	161	C35Z-31820D.....	176	C4-0344-02D.....	159	C45-9784E.....	177	C52-1000I-S.....	178	C55-2006I.....	184
C2H-2030.....	161	C35Z-31820EMH..	176	C4-0344-02E.....	159	C45-9784EMT.....	177	C52-1000IX.....	178	C55-2006I-S.....	184
C2H-2030A.....	161	C35Z-31824D.....	176	C4-0344-02EH.....	159	C45-9786A.....	177	C52-1004I.....	178	C55-2006IX.....	184
C2H-2030D.....	161	C35Z-31824EMH..	176	C4-0344-05.....	159	C45-9786D.....	177	C52-1004I-S.....	178	C55-2008I.....	184
C2H-2030E.....	161	C35Z-31826D.....	176	C4-0344-05A.....	159	C45-9786E.....	177	C52-1004IX.....	178	C55-2008I-S.....	184
C2H-2030EH.....	161	C35Z-31826EMH..	176	C4-0344-05D.....	159	C45-9786EMT.....	177	C52-1006I.....	178	C55-2008IX.....	184
C2H-2038.....	161	C35Z-31R20.....	176	C4-0344-05E.....	159	C45-97R4.....	177	C52-1006I-S.....	178	C55-2340I.....	184
C2H-2038A.....	161	C360C.....	58	C4-0344-05EH.....	159	C45-97R6.....	177	C52-1006IX.....	178	C55-2340I-S.....	184
C2H-2038D.....	161	C360CFS.....	58	C4-03R-01.....	159	C4UW.....	114	C52-1008I.....	178	C55-2340IX.....	184
C2H-2038E.....	161	C360CPKG.....	57	C4-03R-02.....	159	C4UWE.....	107	C52-1008I-S.....	178	C55-2344I.....	184
C2H-2038EH.....	161	C360ET.....	57	C4-03R-05.....	159	C4W.....	113	C52-1008IX.....	178	C55-2344I-S.....	184
C2H-2340.....	161	C360ET.....	67	C4-0C0.....	159	C4WE.....	106	C52-1340I.....	178	C55-2344IX.....	184
C2H-2340A.....	161	C360IZR.5S6.....	34	C4-0C4.....	159	C5-2004.....	172	C52-1340I-S.....	178	C55-2346I.....	184
C2H-2340D.....	161	C360IZR.5S6PK.....	34	C4-1004-1.....	162	C5-2004A.....	172	C52-1340IX.....	178	C55-2346I-S.....	184
C2H-2340E.....	161	C360NFFS.....	58	C4-1004-1A.....	162	C5-2004D.....	172	C52-1344I.....	178	C55-2346IX.....	184
C2H-2340EH.....	161	C360NFPKG.....	57	C4-1004-1D.....	162	C5-2004E.....	172	C52-1344I-S.....	178	C55-2348I.....	184
C2H-2348.....	161	C360NFS6.....	58	C4-1004-1E.....	162	C5-2004EMH.....	172	C52-1344IX.....	178	C55-2348I-S.....	184
C2H-2348A.....	161	C360PPK.....	57	C4-1004-1EH.....	162	C5-2006.....	172	C52-1346I.....	178	C55-2348IX.....	184
C2H-2348D.....	161	C360QTPKG2.....	57	C4-1004-2.....	162	C5-2006A.....	172	C52-1346I-S.....	178	C55-2C00.....	184
C2H-2348E.....	161	C360QTPKG4.....	57	C4-1004-2A.....	162	C5-2006D.....	172	C52-1346IX.....	178	C55-2C04.....	184
C2H-2348EH.....	161	C360QTPKG6.....	57	C4-1004-2D.....	162	C5-2006D.....	173	C52-1348I.....	178	C55-2C06.....	184
C2V-1006.....	179	C360QUPKG2.....	57	C4-1004-2E.....	162	C5-2006E.....	172	C52-1348I-S.....	178	C55-2C08.....	184
C2V-1006A.....	179	C360QUPKG4.....	57	C4-1004-2EH.....	162	C5-2006EMH.....	172	C52-1348IX.....	178	C55-2C40.....	184
C2V-1006D.....	179	C360QUPKG6.....	57	C4-1004-5.....	162	C5-2006EMTD.....	173	C52-1C00.....	178	C55-2C44.....	184
C2V-1006E.....	179	C360QXPKG2.....	57	C4-1004-5A.....	162	C5-2006EMT.....	172	C52-1C04.....	178	C55-2C46.....	184
C2V-1006EH.....	179	C360QXPKG4.....	57	C4-1004-5D.....	162	C5-2034.....	172	C52-1C06.....	178	C55-2C48.....	184
C2V-1346.....	179	C360QXPKG6.....	57	C4-1004-5E.....	162	C5-2034D.....	172	C52-1C08.....	178	C5H-2000.....	172
C2V-1346A.....	179	C360RU.5FS2.....	58	C4-1004-5EH.....	162	C5-2034E.....	172	C52-1C40.....	178	C5H-2000A.....	172
C2V-1346D.....	179	C360RU.5FS4.....	58	C4-1034-1.....	162	C5-2034EMH.....	172	C52-1C44.....	178	C5H-2000D.....	172, 173
C2V-1346E.....	179	C360RU.5FS6.....	58	C4-1034-1A.....	162	C5-2036.....	172	C52-1C46.....	178	C5H-2000E.....	172
C2V-1346EH.....	179	C360RU.5S62.....	58	C4-1034-1D.....	162	C5-2036A.....	172	C52-1C48.....	178	C5H-2000EMT.....	172
C2V-1C06.....	179	C360RU.5S64.....	58	C4-1034-1E.....	162	C5-2036D.....	172	C52-2000I.....	180	C5H-2000EMTD.....	173
C2V-1C46.....	179	C360RU.5S66.....	58	C4-1034-1EH.....	162	C5-2036E.....	172	C52-2000I-S.....	180	C5H-2008.....	172
C2V-2006.....	181	C360RU1FS6.....	58	C4-1034-2.....	162	C5-2036EMH.....	172	C52-2000IX.....	180	C5H-2008A.....	172
C2V-2006A.....	181	C360RU1S66.....	58	C4-1034-2A.....	162	C5-20R0H 172, 173, 184		C52-2004I.....	180	C5H-2008D.....	172
C2V-2006D.....	181	C360UFS2.....	58	C4-1034-2D.....	162	C5-20R4.....	172, 184	C52-2004I-S.....	180	C5H-2008D.....	173
C2V-2006E.....	181	C360UFS4.....	58	C4-1034-2E.....	162	C5-20R6.....	172, 173, 184	C52-2004IX.....	180	C5H-2008E.....	172
C2V-2006EH.....	181	C360UFS6.....	58	C4-1034-2EH.....	162	C5-20R8H 172, 173, 184		C52-2006I.....	180	C5H-2008EMT.....	172
C2V-2346.....	181	C360UPKG2.....	57	C4-1034-5.....	162	C5-2344.....	172	C52-2006I-S.....	180	C5H-2008EMTD.....	173
C2V-2346A.....	181	C360UPKG4.....	57	C4-1034-5A.....	162	C5-2344A.....	172	C52-2006IX.....	180	C5H-2030.....	172
C2V-2346D.....	181	C360UPKG6.....	57	C4-1034-5D.....	162	C5-2344D.....	172	C52-2008I.....	180	C5H-2030A.....	172
C2V-2346E.....	181	C360US62.....	58	C4-1034-5E.....	162	C5-2344E.....	172	C52-2008I-S.....	180	C5H-2030D.....	172
C2V-2346EH.....	181	C360US64.....	58	C4-1034-5EH.....	162	C5-2344EMH.....	172	C52-2008IX.....	180	C5H-2030E.....	172
C2V-2C06.....	181	C360US66.....	58	C4-10R-1.....	162	C5-2346.....	172	C52-2340I.....	180	C5H-2030EMT.....	172
C2V-2C46.....	181	C4-0004-01.....	159	C4-10R-2.....	162	C5-2346A.....	172	C52-2340I-S.....	180	C5H-2038.....	172
C3-1006.....	179	C4-0004-01A.....	159	C4-10R-5.....	162	C5-2346D.....	172	C52-2340IX.....	180	C5H-2038A.....	172
C3-1006A.....	179	C4-0004-01D.....	159	C4-1344-1.....	162	C5-2346D.....	173	C52-2344I.....	180	C5H-2038D.....	172
C3-1006D.....	179	C4-0004-01E.....	159	C4-1344-1A.....	162	C5-2346E.....	172	C52-2344I-S.....	180	C5H-2038E.....	172
C3-1006E.....	179	C4-0004-01EH.....	159	C4-1344-1D.....	162	C5-2346EMH.....	172	C52-2344IX.....	180	C5H-2038EMT.....	172
C3-1006EH.....	179	C4-0004-02.....	159	C4-1344-1E.....	162	C5-2346EMTD.....	173	C52-2346I.....	180	C5H-2340.....	172
C3-1346.....	179	C4-0004-02A.....	159	C4-1344-1EH.....	162	C5-23R0H 172, 173, 184		C52-2346I-S.....	180	C5H-2340A.....	172
C3-1346A.....	179	C4-0004-02D.....	159	C4-1344-2.....	162	C5-23R4.....	172, 184	C52-2346IX.....	180	C5H-2340D.....	172, 173
C3-1346D.....	179	C4-0004-02E.....	159	C4-1344-2A.....	162	C5-23R6.....	172, 173, 184	C52-2348I.....	180	C5H-2340E.....	172
C3-1346E.....	179	C4-0004-02EH.....	159	C4-1344-2D.....	162	C5-23R8H 172, 173, 184		C52-2348I-S.....	180	C5H-2340EMT.....	172
C3-1346EH.....	179	C4-0004-05.....	159	C4-1344-2E.....	162	C5-2C00H.....	172, 173	C52-2348IX.....	180	C5H-2340EMTD.....	173
C3-1C06.....	179	C4-0004-05A.....	159	C4-1344-2EH.....	162	C5-2C04.....	172	C52-2C00.....	180	C5H-2348.....	172
C3-1C46.....	179	C4-0004-05D.....	159	C4-1344-5.....	162	C5-2C06.....	172, 173	C52-2C04.....	180	C5H-2348A.....	172
C3-2006.....	181	C4-0004-05E.....	159	C4-1344-5A.....	162	C5-2C08.....	172, 173	C52-2C06.....	180	C5H-2348D.....	172, 173
C3-2006A.....	181	C4-0004-05EH.....	159	C4-1344-5D.....	162	C5-2C30H.....	172	C52-2C08.....	180	C5H-2348E.....	172
C3-2006D.....	181	C4-00R-01.....	159	C4-1344-5E.....	162	C5-2C34.....	172	C52-2C40.....	180	C5H-2348EMT.....	172
C3-2006E.....	181	C4-00R-02.....	159	C4-1344-5EH.....	162	C5-2C36.....	172	C52-2C44.....	180	C5H-2348EMTD.....	173
C3-2006EH.....	181	C4-00R-05.....	159	C4-13R-1.....	162	C5-2C38H.....	172	C52-2C46.....	180	C5M1KF.....	74
C3-2346.....	181	C4-0344-01.....	159	C4-13R-2.....	162	C5-2C40H.....	172, 173	C52-2C48.....	180	C5M1PK.....	74
C3-2346A.....	181	C4-0344-01A.....	159	C4-13R-5.....	162	C5-2C44.....	172	C52-2C48.....	180	C5M2KF.....	74
C3-2346D.....	181	C4-0344-01D.....	159	C4-1C0.....	162	C5-2C46.....	172	C55-2000I.....	184	C5M2PK.....	74
C3-2346E.....	181	C4-0344-01E.....	159	C4-1C3.....	162	C5-2C46.....	173	C55-2000IX.....	184	C6-1006.....	160

INDEX BY PRODUCT NUMBER

C6-1006A — CFS-A03018-040B

C6-1006A	160	C65Z-3188I	185	C72NX-6690E	153	C74X-1694-01EH	157	CCKF-5	71	CFL-1L	68
C6-1006D	160	C65Z-3188I-S	185	C72NX-6690EH	153	C74X-1694-02	157	CCPK-5	71	CFL-1N	68
C6-1006E	160	C6UW	114	C72NX-6696	153	C74X-1694-02A	157	CD10-4841-M1A	83	CFL-1P	68
C6-1006EH	160	C6UWE	107	C72NX-6696A	153	C74X-1694-02D	157	CD50-8572-M2A	83	CFL-1PK	68
C6-1346	160	C6W	113	C72NX-6696D	153	C74X-1694-02E	157	CEF1	43	CFL-1R	68
C6-1346A	160	C6WE	106	C72NX-6696E	153	C74X-1694-02EH	157	CEF1.5	43	CFL-1W	68
C6-1346D	160	C72-16R0	156	C72NX-6696EH	153	C74X-1694-05	157	CEF1.5F	43	CFL-1Y	68
C6-1346E	160	C72-16R4	156	C72X-1690	156	C74X-1694-05A	157	CEF1F	43	CFL-2A	68
C6-1346EH	160	C72-16R6	156	C72X-1690A	156	C74X-1694-05D	157	CEF2.51.0	43	CFL-2A-PK	68
C6-1C06	160	C72-16R8	156	C72X-1690D	156	C74X-1694-05E	157	CEF2.51.0F	43	CFL-2BE	68
C6-1C46	160	C72-1C90	156	C72X-1690E	156	C74X-1694-05EH	157	CEF211.0	43	CFL-2BK	68
C6-2006	163	C72-1C94	156	C72X-1690ED	156	C75-16R0	171	CEF211.0F	43	CFL-2BR	68
C6-2006A	163	C72-1C96	156	C72X-1694	156	C75-16R6	171	CEF212.0	43	CFL-2DG	68
C6-2006D	163	C72-1C98	156	C72X-1694A	156	C75-16R8	171	CEF212.0F	43	CFL-2E	68
C6-2006E	163	C72H-1690	156	C72X-1694D	156	C75-1C90	171	CEF412.1	44	CFL-2G	68
C6-2006EH	163	C72H-1690A	156	C72X-1694E	156	C75-1C96	171	CEF412.1F	44	CFL-2L	68
C6-2346	163	C72H-1690D	156	C72X-1694EH	156	C75-1C98	171	CEF413.0	44	CFL-2N	68
C6-2346A	163	C72H-1690E	156	C72X-1696	156	C75H-1690A	171	CEF413.0F	44	CFL-2P	68
C6-2346D	163	C72H-1690ED	156	C72X-1696A	156	C75H-1690D	171	CEF414.0	44	CFL-2PK	68
C6-2346E	163	C72H-1694	156	C72X-1696D	156	C75H-1690E	171	CEF414.0F	44	CFL-2R	68
C6-2346EH	163	C72H-1694A	156	C72X-1696E	156	C75H-1690EMH	171	CEF414.6	44	CFL-2W	68
C6-2C06	163	C72H-1694D	156	C72X-1696EH	156	C75H-1696A	171	CEF414.6F	44	CFL-2Y	68
C6-2C46	163	C72H-1694E	156	C72X-1698	156	C75H-1696D	171	CEN1KF	69	CFL-4D	72, 177
C62-3180I	183	C72H-1694EH	156	C72X-1698A	156	C75H-1696E	171	CEN1PK	69	CFL-4KF	177
C62-3180I-S	183	C72H-1696	156	C72X-1698D	156	C75H-1696EMH	171	CEN2KF	69	CFL-4KF	72
C62-3184I	183	C72H-1696A	156	C72X-1698E	156	C75H-1698A	171	CEN2PK	69	CFL-4PPS	177
C62-3184I-S	183	C72H-1696D	156	C72X-1698ED	156	C75H-1698D	171	CEPA2KF	77	CFL-CB1KF	68
C62-3186I	183	C72H-1696E	156	C74-16R-.01	157	C75H-1698E	171	CEPA2PK	77	CFL-CB1PK	68
C62-3186I-S	183	C72H-1696EH	156	C74-16R-.02	157	C75H-1698EMH	171	CEPA4KF	77	CFL-CB2KF	68
C62-3188I	183	C72H-1698	156	C74-16R-.05	157	C75N-66R0	170	CEPA4PK	77	CFL-CB2PK	68
C62-3188I-S	183	C72H-1698A	156	C74-1C9	157	C75N-66R6	170	CF-1A	69	CFL-CB4KF-S	72
C62-6180I	183	C72H-1698D	156	C74H-1694-01	157	C75N-66R8	170	CF-1BE	69	CFLAKF	76
C62-6180I-S	183	C72H-1698E	156	C74H-1694-01A	157	C75N-6C90	170	CF-1BK	69	CFLAPFA	76
C62-6184I	183	C72H-1698ED	156	C74H-1694-01D	157	C75N-6C96	170	CF-1BR	69	CFLAPK	76
C62-6184I-S	183	C72M-46R4	152	C74H-1694-01E	157	C75N-6C98	170	CF-1DG	69	CFPA2KF	77
C62-6186I	183	C72M-46R6	152	C74H-1694-01EH	157	C75NX-6690A	170	CF-1E	69	CFPA2PK	77
C62-6186I-S	183	C72M-4C94	152	C74H-1694-02	157	C75NX-6690D	170	CF-1G	69	CFPA4KF	77
C62-6188I	183	C72M-4C96	152	C74H-1694-02A	157	C75NX-6690E	170	CF-1L	69	CFPA4PK	77
C62-6188I-S	183	C72M-66R0	152	C74H-1694-02D	157	C75NX-6690EMH	170	CF-1N	69	CFS-A01010-010B	236
C62Z-3180I	182	C72M-66R6	152	C74H-1694-02E	157	C75NX-6696A	170	CF-1P	69	CFS-A01010-020B	236
C62Z-3180I-S	182	C72M-6C90	152	C74H-1694-02EH	157	C75NX-6696D	170	CF-1R	69	CFS-A01018-010B	236
C62Z-3184I	182	C72M-6C96	152	C74H-1694-05	157	C75NX-6696E	170	CF-1W	69	CFS-A01018-018B	236
C62Z-3184I-S	182	C72MU-4694	152	C74H-1694-05A	157	C75NX-6696EMH	170	CF-1Y	69	CFS-A01018-040B	236
C62Z-3186I	182	C72MU-4694A	152	C74H-1694-05D	157	C75NX-6698A	170	CF-2A	69	CFS-A01525-010B	236
C62Z-3186I-S	182	C72MU-4694D	152	C74H-1694-05E	157	C75NX-6698D	170	CF-2BE	69	CFS-A01525-025B	236
C62Z-3188I	182	C72MU-4694E	152	C74H-1694-05EH	157	C75NX-6698E	170	CF-2BK	69	CFS-A01525-050B	236
C62Z-3188I-S	182	C72MU-4694EH	152	C74N-66R-.004	153	C75NX-6698EMH	170	CF-2BR	69	CFS-A01525-100B	236
C65-3180I	185	C72MU-4696	152	C74N-66R-.01	153	C8UW	114	CF-2DG	69	CFS-A01525-140B	236
C65-3180I-S	185	C72MU-4696A	152	C74N-66R-.02	153	C8UWE	107	CF-2E	69	CFS-A01525-150B	236
C65-3184I	185	C72MU-4696D	152	C74N-6C9	153	C8W	113	CF-2G	69	CFS-A01532-010B	236
C65-3184I-S	185	C72MU-4696E	152	C74NX-6694-.004	153	C8WE	106	CF-2L	69	CFS-A01532-025B	236
C65-3186I	185	C72MU-4696EH	152	C74NX-6694-.004A	153	C9M1KF	74	CF-2N	69	CFS-A01532-032B	236
C65-3186I-S	185	C72MX-6690	152	C74NX-6694-.004D	153	C9M1PK	74	CF-2P	69	CFS-A01532-050B	236
C65-3188I	185	C72MX-6690A	152	C74NX-6694-.004E	153	C9M2KF	74	CF-2R	69	CFS-A01532-100B	236
C65-3188I-S	185	C72MX-6690D	152	C74NX-6694-.004EH	153	C9M2PK	74	CF-2W	69	CFS-A01532-200B	236
C65-6180I	185	C72MX-6690E	152	C74NX-6694-.01	153	CBUCKF	73	CF-2Y	69	CFS-A01532-300B	236
C65-6180I-S	185	C72MX-6690EH	152	C74NX-6694-.01A	153	CBUCPK	73	CF-W1	69	CFS-A01532-400B	236
C65-6184I	185	C72MX-6696	152	C74NX-6694-.01D	153	CBUCS6	73	CF-W2	69	CFS-A01532-500B	236
C65-6184I-S	185	C72MX-6696A	152	C74NX-6694-.01E	153	CBUFLKF	76	CFE-S10	78	CFS-A01553-015B	236
C65-6186I	185	C72MX-6696D	152	C74NX-6694-.01EH	153	CBUFLPK	76	CFE-S2	78	CFS-A01553-050B	236
C65-6186I-S	185	C72MX-6696E	152	C74NX-6694-.02	153	CBUFK	73	CFE-S75	78	CFS-A01553-100B	236
C65-6188I	185	C72MX-6696EH	152	C74NX-6694-.02A	153	CBULKF	73	CFL-1A	68	CFS-A01553-150B	236
C65-6188I-S	185	C72N-66R0	153	C74NX-6694-.02D	153	CBULPK	73	CFL-1A-PK	68	CFS-A01553-300B	236
C65Z-3180I	185	C72N-66R6	153	C74NX-6694-.02E	153	CBULS6	73	CFL-1BE	68	CFS-A01553-500B	236
C65Z-3180I-S	185	C72N-6C90	153	C74NX-6694-.02EH	153	CBUMKF	73	CFL-1BK	68	CFS-A02010-010B	236
C65Z-3184I	185	C72N-6C96	153	C74X-1694-.01	157	CBUMPK	73	CFL-1BR	68	CFS-A02010-020B	236
C65Z-3184I-S	185	C72NX-6690	153	C74X-1694-.01A	157	CBUMS6	73	CFL-1DG	68	CFS-A03018-010B	236
C65Z-3186I	185	C72NX-6690A	153	C74X-1694-.01D	157	CBUPK	73	CFL-1E	68	CFS-A03018-018B	236
C65Z-3186I-S	185	C72NX-6690D	153	C74X-1694-.01E	157	CBUS6	73	CFL-1G	68	CFS-A03018-100B	236

INDEX BY PRODUCT NUMBER

CFS-A03025-010B — CSL1KTI

CFS-A03025-010B . 236	CFS-B03025-050B . 237	CFS-D06025-050B . 237	CFS-PB1532-100 . 244	CFT-TXC 70	CN4-4344-02D 155
CFS-A03025-025B . 236	CFS-B03025-100B . 237	CFS-D06032-025B . 237	CFS-PB1553-200 244	CFT-TXL 70	CN4-4344-02EH 155
CFS-A03025-040B . 236	CFS-B03032-010B . 237	CFS-D06032-050B . 237	CFS-PB3032-100 244	CFT1K-110 70	CN4-43R-004 155
CFS-A03025-050B . 236	CFS-B03032-025B . 237	CFS-D06032-100B . 237	CFS-PB3053-200 244	CFT1K-220 70	CN4-43R-01 155
CFS-A03025-100B . 236	CFS-B03032-050B . 237	CFS-D06053-050B . 237	CFS-PC1532-100 244	CFT2K-110 70	CN4-43R-02 155
CFS-A03025-150B . 236	CFS-B03032-100B . 237	CFS-D06053-083B . 237	CFS-PC1553-200 244	CFT2K-220 70	CN4-4C4I 155
CFS-A03032-010B . 236	CFS-B03032-200B . 237	CFS-D06053-100B . 237	CFS-PC3032-100 244	CGC41 75	CNFT 67
CFS-A03032-025B . 236	CFS-B03032-300B . 237	CFS-E01018-100A . 238	CFS-PC3053-200 244	CGC41KF 75	CNSL1KPK 154
CFS-A03032-032B . 236	CFS-B03032-500B . 237	CFS-E01525-140A . 238	CFS-PD1532-100 240	CGC42 75	CNSL250PK 154
CFS-A03032-050B . 236	CFS-B03053-050B . 237	CFS-E01532-180A . 238	CFS-PD1553-200 240	CGC42KF 75	CNSL2KPK 154
CFS-A03032-100B . 236	CFS-B03053-100B . 237	CFS-E01553-300A . 238	CFS-PD3032-100 240	CGCB 75	CNSL500PK 154
CFS-A03032-200B . 236	CFS-B03053-150B . 237	CFS-E02018-100A . 238	CFS-PD3053-200 240	CGCBKF 75	CNSL5KPK 154
CFS-A03032-300B . 236	CFS-B03053-265B . 237	CFS-E02520-112A . 238	CFS-PN1532-100 244	CGCG41 75	CNV1A10S1 214
CFS-A03032-400B . 236	CFS-B03053-300B . 237	CFS-E03018-100A . 238	CFS-PN1553-200 244	CGCG42 75	CNV1A150S1 214
CFS-A03032-500B . 236	CFS-B03053-500B . 237	CFS-E03025-140A . 238	CFS-PN3032-100 244	CGCN 75	CNV1A250S1 214
CFS-A03053-015B . 236	CFS-B04018-018B . 237	CFS-E03032-180A . 238	CFS-PN3053-200 244	CGCNKF 75	CNV1A500S1 214
CFS-A03053-050B . 236	CFS-B04018-040B . 237	CFS-E03053-300A . 238	CFS-PP1532-100 244	CGCR 75	CNV1A50S1 214
CFS-A03053-100B . 236	CFS-B06025-010B . 237	CFS-E04018-100A . 238	CFS-PP1553-200 244	CGCRKF 75	CNV1S10S1 214
CFS-A03053-150B . 236	CFS-B06025-025B . 237	CFS-E06025-140A . 238	CFS-PP3032-100 244	CI4UW.2 112	CNV1S150S1 214
CFS-A03053-300B . 236	CFS-B06025-050B . 237	CFS-E06032-180A . 238	CFS-PP3053-200 244	CI4UW.5 112	CNV1S250S1 214
CFS-A03053-500B . 236	CFS-B06025-100B . 237	CFS-E06053-300A . 238	CFS-PQ1532-100 240	CI4UW1 112	CNV1S500S1 214
CFS-A04018-018B . 236	CFS-B06032-010B . 237	CFS-E07553-300A . 238	CFS-PQ1553-200 240	CI4UW2 112	CNV1S50S1 214
CFS-A06025-010B . 236	CFS-B06032-025B . 237	CFS-F01525-025A . 238	CFS-PQ3032-100 240	CI4UWE.2 103	CNVEKB 214
CFS-A06025-025B . 236	CFS-B06032-050B . 237	CFS-F01525-050A . 238	CFS-PQ3053-200 240	CI4UWE.5 103	CNVEKG 214
CFS-A06025-050B . 236	CFS-B06032-100B . 237	CFS-F01532-025A . 238	CFS-PR1532-100 244	CI4UWE1 103	CNVEKLB 214
CFS-A06025-100B . 236	CFS-B06032-200B . 237	CFS-F01532-050A . 238	CFS-PR1553-200 244	CI4UWE2 103	CNVEKLG 214
CFS-A06025-150B . 236	CFS-B06032-300B . 237	CFS-F01532-100A . 238	CFS-PR3032-100 244	CI4W.06 112	CNVEKLR 214
CFS-A06032-010B . 236	CFS-B06032-500B . 237	CFS-F01553-050A . 238	CFS-PR3053-200 244	CI4W.1 112	CNVEKLS 214
CFS-A06032-032B . 236	CFS-B06053-100B . 237	CFS-F01553-100A . 238	CFS-PS1532-100 244	CI4W.2 112	CNVEKLU 214
CFS-A06032-050B . 236	CFS-B06053-150B . 237	CFS-F03025-025A . 238	CFS-PS1553-200 244	CI4W.5 112	CNVEKR 214
CFS-A06032-100B . 236	CFS-B06053-200B . 237	CFS-F03025-050A . 238	CFS-PS3032-100 244	CI4WE.06 102	CNVEKS 214
CFS-A06032-200B . 236	CFS-B06053-265B . 237	CFS-F03032-025A . 238	CFS-PS3053-200 244	CI4WE.1 102	CNVEKU 214
CFS-A06032-300B . 236	CFS-B06053-300B . 237	CFS-F03032-050A . 238	CFS-X1553-200 240	CI4WE.2 102	CP-CM1-P 84
CFS-A06032-400B . 236	CFS-B06053-500B . 237	CFS-F03032-100A . 238	CFS-X1553-500 240	CI4WE.5 102	CP-DSM 84
CFS-A06032-500B . 236	CFS-C01525-025B . 236	CFS-F03053-050A . 238	CFS-X3053-200 240	CM 203	CP-DSM2 84
CFS-A06053-100B . 236	CFS-C01525-050B . 236	CFS-F03053-100A . 238	CFS-X3053-500 240	CM1XKF 75	CP2-4841-100D 84
CFS-A06053-150B . 236	CFS-C01532-025B . 236	CFS-F06025-025A . 238	CFS-Y3053-100 240	CM1XPK 75	CP2-4841-100M1 84
CFS-A06053-300B . 236	CFS-C01532-050B . 236	CFS-F06025-050A . 238	CFS-Y5053-100 240	CM2XKF 75	CP2-4841-100SM 84
CFS-A06053-500B . 236	CFS-C01553-050B . 236	CFS-F06032-025A . 238	CFS-Z1553-100 240	CM2XPK 75	CP3-8182-625D 84
CFS-B01010-010B . 237	CFS-C01553-100B . 236	CFS-F06032-050A . 238	CFS-Z3053-100 240	CMH 208	CP3-8182-625M2 84
CFS-B01010-020B . 237	CFS-C03025-025B . 236	CFS-F06032-100A . 238	CFS-Z5053-100 240	CMH11H 208	CP3-8182-625SM2 84
CFS-B01018-018B . 237	CFS-C03025-050B . 236	CFS-F06053-050A . 238	CFLS100FEP 165, 183	CMH11L 208	CPA2KF 77
CFS-B01018-040B . 237	CFS-C03032-025B . 236	CFS-F06053-100A . 238	CFLS100PK 165, 183	CMH12H 208	CPA2PK 77
CFS-B01525-010B . 237	CFS-C03032-050B . 236	CFS-G01010-010A . 238	CFLS100TF 165, 183	CMH12L 208	CPA4KF 77
CFS-B01525-025B . 237	CFS-C03053-050B . 236	CFS-G01018-018A . 238	CFLS1KFEP 165, 183	CMH13 208	CPA4PK 77
CFS-B01525-050B . 237	CFS-C03053-100B . 236	CFS-G01525-025A . 238	CFLS1KPK 165, 183	CMH13H 208	CPKF 71
CFS-B01525-100B . 237	CFS-C06025-025B . 236	CFS-G01532-025A . 238	CFLS1KTF 165, 183	CMH13L 208	CPPK 71
CFS-B01532-010B . 237	CFS-C06025-050B . 236	CFS-G01532-050A . 238	CFLS20FEP 165, 183	CMHMP 208	CR10 205
CFS-B01532-025B . 237	CFS-C06032-025B . 236	CFS-G01532-100A . 238	CFLS20PK 165, 183	CMHMP 208	CR11 205
CFS-B01532-050B . 237	CFS-C06032-050B . 236	CFS-G01553-050A . 238	CFLS20TF 165, 183	CMLAKF 76	CR3 205
CFS-B01532-100B . 237	CFS-C06053-050B . 236	CFS-G01553-100A . 238	CFLS250FEP 165, 183	CMLAPFA 76	CR4 205
CFS-B01532-200B . 237	CFS-C06053-100B . 236	CFS-G02010-010A . 238	CFLS250PK 165, 183	CMLAPK 76	CR8 205
CFS-B01532-300B . 237	CFS-D01525-025B . 237	CFS-G02018-018A . 238	CFLS250TF 165, 183	CN2-4340 154	CR8 205
CFS-B01532-500B . 237	CFS-D01525-050B . 237	CFS-G03025-025A . 238	CFLS2KFEP 165, 183	CN2-4340D 154	CR9 205
CFS-B01553-050B . 237	CFS-D01532-025B . 237	CFS-G03032-025A . 238	CFLS2KPK 165, 183	CN2-4340EH 154	CSD10UW 132
CFS-B01553-100B . 237	CFS-D01532-050B . 237	CFS-G03032-050A . 238	CFLS2KTF 165, 183	CN2-4346 154	CSD4UW 132
CFS-B01553-150B . 237	CFS-D01532-100B . 237	CFS-G03032-100A . 238	CFLS500FEP 165, 183	CN2-4346D 154	CSD6UW 132
CFS-B01553-200B . 237	CFS-D01553-050B . 237	CFS-G03053-050A . 238	CFLS500PK 165, 183	CN2-4346EH 154	CSL10 142, 156,
CFS-B01553-265B . 237	CFS-D01553-083B . 237	CFS-G03053-100A . 238	CFLS500TF 165, 183	CN2-43R0 154	159, 178, 180
CFS-B01553-300B . 237	CFS-D01553-100B . 237	CFS-G06025-025A . 238	CFLS50FEP 165, 183	CN2-43R6 154	CSL100 142, 156,
CFS-B01553-500B . 237	CFS-D03025-025B . 237	CFS-G06032-025A . 238	CFLS50PK 165, 183	CN2-4C40I 154	159, 178, 180
CFS-B02010-010B . 237	CFS-D03025-050B . 237	CFS-G06032-050A . 238	CFLS50TF 165, 183	CN2-4C46I 154	CSL100TI 159
CFS-B02010-020B . 237	CFS-D03032-025B . 237	CFS-G06053-100A . 238	CFT-110 70	CN4-4344-004 155	CSL10K 142, 156,
CFS-B02018-018B . 237	CFS-D03032-050B . 237	CFS-N03025-025 235	CFT-220 70	CN4-4344-004D 155	159, 178, 180
CFS-B02018-040B . 237	CFS-D03032-100B . 237	CFS-N03053-100 235	CFT-H 70	CN4-4344-004EH 155	CSL10TI 159
CFS-B03018-018B . 237	CFS-D03053-050B . 237	CFS-PA1532-100 240	CFT-R 70	CN4-4344-01 155	CSL1K 142, 156,
CFS-B03018-040B . 237	CFS-D03053-083B . 237	CFS-PA1553-200 240	CFT-TL 70	CN4-4344-01D 155	159, 178, 180
CFS-B03025-010B . 237	CFS-D06025-010B . 237	CFS-PA3053-100 240	CFT-TC 70	CN4-4344-01EH 155	CSL1KTI 159
CFS-B03025-025B . 237	CFS-D06025-025B . 237	CFS-PA3053-200 240	CFT-TM 70	CN4-4344-02 155	

INDEX BY PRODUCT NUMBER

CSL2 — E4C8UWT

CSL2	142, 156, 159, 178, 180	CXMPK	74	D-4-I-220	223	DCSD10MWE	122	DV22-2114-5	142	E2I4UWE1	103
CSL20	142, 156, 159, 178, 180	CXPK	74	D-4-I-HP58	223	DCSD10UW	132	DV22-2114-1	142	E2I4UWE2	103
CSL20TI	159	CZBUCKF	73	D-4-I-HP58-220	223	DCSD12MWE	122	DV22-2116	142	E2NI4WE.06	102
CSL250	142, 156, 159, 178, 180	CZBUCPK	73	D-4-I-SH14-R	223	DCSD16MWE	122	DV22-21D	142	E2NI4WE.1	102
CSL250TI	159	CZBUCS6	73	D-4-I-SH14-R-220	223	DCSD4UW	132	DV22-22D	142	E2NI4WE.2	102
CSL2K	142, 156, 159, 178, 180	CZBUKF	73	D-4-I-SH17-R	223	DCSD6MWE	122	DV22-3110	142	E2NI4WE.5	102
CSL5	142, 156, 159, 178, 180	CZBUMPK	73	D-4-I-SH17-R-220	223	DCSD6UW	132	DV22-3114-5	142	E2SC10MWE	125
CSL50	142, 156, 159, 178, 180	CZBUMS6	73	D-4-I-TQ-R	223	DCSF10MWE	126	DV22-3114-1	142	E2SC12MWE	125
CSL500	142, 156, 159, 178, 180	CZBUPK	73	D-4-I-TQ-R-220	223	DCSF12MWE	126	DV22-3116	142	E2SC16MWE	125
CSL500TI	159	CZBUS6	73	D-4-I-VA38-R	223	DCSF16MWE	126	DV22-31D	142	E2SC6MWE	125
CSL50TI	159	CZBUS6	73	D-4-I-VA38-R-220	223	DCSF6MWE	126	DVI	199	E2SD10MWE	123
CSL5K	142, 156, 159, 178, 180	CZSL100FEP	164, 182	D-5-6890	222	DCST10MWE	128	DVI-220	199	E2SD12MWE	123
CSLN1K	153	CZSL100PK	159, 164, 178, 180, 182	D10UW	115	DCST12MWE	128	DVL4MWE2	110	E2SD16MWE	123
CSLN2K	153	CZSL100TF	164, 182	D10UWE	110	DCST16MWE	128	DVL6MWE2	110	E2SD6MWE	123
CSLN5K	153	CZSL10FEP	164, 182	D10UWT	111	DCST4UW	133	DVL8MWE2	110	E2SF10MWE	127
CSS-X1553-200	240	CZSL10PK	159, 164, 178, 180, 182	D4UW	115	DCST6MWE	128	DVLS4MWE2	125	E2SF12MWE	127
CSS-X3053-200	240	CZSL10TF	164, 182	D4UWE	110	DCST6UW	133	DVLS6MWE2	125	E2SF16MWE	127
CST	68	CZSL10TWF	164, 182	D4UWT	111	DCSTF10MWE	130	DVLS8MWE2	125	E2SF6MWE	127
CTA2KF	76	CZSL1KFEF	164, 182	D6UW	115	DCSTF12MWE	130	DVLSD10MWE2	123	E2ST10MWE	129
CTA2PK	76	CZSL1KPK	159, 164, 178, 180, 182	D6UWT	111	DCSTF16MWE	130	DVLSD4MWE2	123	E2ST12MWE	129
CTA2S6	76	CZSL1KTF	164, 182	D8UW	115	DCSTF6MWE	130	DVLSD6MWE2	123	E2ST16MWE	129
CTA4KF	76	CZSL20FEP	164, 182	D8UWE	110	DI4UWE.2	103	DVLSD8MWE2	123	E2ST6MWE	129
CTA4PK	76	CZSL20PK	159, 164, 178, 180, 182	D8UWT	111	DI4UWE.5	103	DVLSF4MWE2	127	E2STF10MWE	131
CTA4S6	76	CZSL20TF	164, 182	DC10UW	114	DI4UWE1	103	DVLSF6MWE2	127	E2STF12MWE	131
CTCKF	74	CZSL250FEP	164, 182	DC10UWE	107	DI4UWE2	103	DVLSF8MWE2	127	E2STF16MWE	131
CTCPK	74	CZSL250PK	159, 164, 178, 180, 182	DC10UWT	109	DL10UW	116	DVSP4	196	E2STF6MWE	131
CTKF	74	CZSL250TF	164, 182	DC10W	113	DL4UW	116	DVSP4-220	196	E2VLSC4MWE2	125
CTLPK	74	CZSL250TWF	164, 182	DC10WE	106	DL6UW	116	E		E2VLSC6MWE2	125
CTMKF	74	CZSL2KFEP	164, 182	DC10WT	108	DN10WE	104	E10	193	E2VLSC8MWE2	125
CTMPK	74	CZSL2KPK	159, 164, 178, 180, 182	DC4UW	114	DN10WT	105	E102	193	E2VLS4MWE2	123
CTPK	74	CZSL2KTF	164, 182	DC4UWE	107	DN4WE	104	E10S	193	E2VLS6MWE2	123
CTLKF	74	CZSL2PK	159, 178, 180	DC4UWT	109	DN4WT	105	E10UW	115	E2VLS8MWE2	123
CTLPK	74	CZSL500FEP	164, 182	DC4W	113	DN6WE	104	E12	193	E2VLSF4MWE2	127
CTMKF	74	CZSL500PK	159, 164, 178, 180, 182	DC4WE	106	DN6WT	105	E122	193	E2VLSF6MWE2	127
CTMPK	74	CZSL500TF	164, 182	DC4WT	108	DN8WE	104	E125	193	E2VLSF8MWE2	127
CTPK	74	CZSL500TWF	164, 182	DC6UW	114	DN8WT	105	E16	193	E30	193
CU4LKF	72	CZSL50PK	159, 164, 178, 180, 182	DC6UWE	107	DNi4WE.06	102	E162	193	E302	193
CUCKF	72	CZSL50TF	164, 182	DC6UWT	109	DNI4WE.1	102	E16S	193	E30S	193
CUCPK	72	CZSL50TWF	164, 182	DC6W	113	DNI4WE.2	102	E2CI4UWE.2	103	E36	193
CUKF	72	CZSL5FEP	164, 182	DC6WE	106	DNI4WE.5	102	E2CI4UWE.5	103	E362	193
CULKF	72	CZSL5KPK	159, 178, 180	DC6WT	108	DSC10MWE	125	E2CI4UWE1	103	E36S	193
CULPK	72	CZSL5PK	159, 164, 178, 180, 182	DC8UW	114	DSC12MWE	125	E2CI4UWE2	103	E4	193
CUMKF	72	CZSL5TF	164, 182	DC8UWE	107	DSC16MWE	125	E2CI4WE.06	102	E410UWE	110
CUMPK	72	CZSL5TWF	164, 182	DC8UWT	109	DSC6MWE	125	E2CI4WE.1	102	E410UWT	111
CUPK	72	CZUCKF	72	DC8W	113	DSD10MWE	123	E2CI4WE.2	102	E42	193
CUTKF	72	CZUCPK	72	DC8WE	106	DSD12MWE	123	E2CI4WE.5	102	E44UWE	110
CUTPK	72	CZUCS6	72	DC8WT	108	DSD16MWE	123	E2CSC10MWE	124	E44UWT	111
CUTPP	72	CZUCS6	72	DCI4UW.2	112	DSD4UW	132	E2CSC12MWE	124	E45	193
CVA10GS1	215	CZUCS6	72	DCI4UW.5	112	DSD6UW	132	E2CSC16MWE	124	E452	193
CVA10GS2	215	CZUCS6	72	DCI4UW1	112	DSD8UW	132	E2CSC6MWE	124	E45S	193
CVA150US1	215	CZUCS6	72	DCI4UW2	112	DSD10MWE	123	E2CSD10MWE	122	E46UWE	110
CVA150US2	215	CZUCS6	72	DCI4UW.2	103	DSD12MWE	123	E2CSD12MWE	122	E46UWT	111
CVA1KYS1	215	CZUCS6	72	DCI4UW.5	103	DSD16MWE	123	E2CSD16MWE	122	E48UWE	110
CVA1KYS2	215	CZUCS6	72	DCI4UWE.1	102	DSD6UW	132	E2CSD6MWE	122	E48UWT	111
CVA500BS1	215	CZUCS6	72	DCI4UWE.2	102	DSD8UW	132	E2CSF10MWE	126	E4C10UWE	107
CVA500BS2	215	CZUCS6	72	DCI4UWE.5	103	DSF10MWE	127	E2CSF12MWE	126	E4C10UWT	109
CVA50RS1	215	CZUCS6	72	DCI4UWE1	103	DSF12MWE	127	E2CSF16MWE	126	E4C10WE	106
CVA50RS2	215	CZUCS6	72	DCI4UWE2	103	DSF16MWE	127	E2CSF6MWE	126	E4C10WT	108
CXCKF	74	CZUMKF	72	DCI4UWE.5	103	DSF6MWE	127	E2CST10MWE	128	E4C4UWE	107
CXCPK	74	CZUMPK	72	DCI4UWE1	103	DST10MWE	129	E2CST12MWE	128	E4C4UWT	109
CXKF	74	CZUMS6	72	DCI4UWE2	102	DST12MWE	129	E2CST16MWE	128	E4C4WE	106
CXLKF	74	CZUPK	72	DCI4W.06	112	DST16MWE	129	E2CST6MWE	128	E4C4WT	108
CXLPK	74	CZUS6	72	DCI4W.1	112	DST6MWE	129	E2CSTF10MWE	130	E4C6UWE	107
CXMKF	74	D		DCI4W.2	112	DSTF10MWE	131	E2CSTF12MWE	130	E4C6UWT	109
		D-2	221	DCI4W.5	112	DSTF12MWE	131	E2CSTF16MWE	130	E4C6WE	106
		D-2-220	221	DCI4WE.06	102	DSTF16MWE	131	E2CSTF6MWE	130	E4C6WT	108
		D-2-I	221	DCI4WE.1	102	DV12-1110	142	E2I4UWE.2	103	E4C8UWE	107
		D-2-I-220	221	DCI4WE.2	102	DV12-1114-5	142	E2I4UWE.5	103	E4C8UWT	109
		D-3-I-7890	222	DCI4WE.5	102	DV12-1114-1	142				
		D-3-I-7890-220	222	DCI4WE1	103	DV12-1116	142				
		D-3-I-HP	222	DCI4W.06	112	DV22-2110	142				
		D-3-I-HP-220	222	DCI4W.1	112						
		D-4-I	223	DCI4W.2	112						
				DCI4W.5	112						
				DCI4WE.06	102						
				DCI4WE.1	102						
				DCI4WE.2	102						
				DCI4WE.5	102						
				DCSC10MWE	124						
				DCSC12MWE	124						
				DCSC16MWE	124						
				DCSC6MWE	124						

INDEX BY PRODUCT NUMBER

E4C8WE — FC10AV6K

E4C8WE.....	106	ECEF616.0.....	45	EDS.....	189	EMT2VLS4MWE2..	125	EU.5L.....	19	EZRF41V-5.....	15
E4C8WT.....	108	ECEF616.0F.....	45	EH.....	189	EMT2VLS6MWE2..	125	EU.5L.....	27	EZRF42KF-5.....	15
E4N10WE.....	104	ECEF617.0.....	45	EH2.....	189	EMT2VLS8MWE2..	125	EU.5T.....	19	EZRF42PK-5.....	15
E4N10WT.....	105	ECEF617.0F.....	45	EH4C10WE.....	106	EMT2VLS10MWE2	123	EU.5T.....	27	EZRF42TFG-5.....	15
E4N4WE.....	104	ECEF8110.0.....	45	EH4C10WT.....	108	EMT2VLS4MWE2..	123	EU2.....	27	EZRF42V-5.....	15
E4N4WT.....	105	ECEF8110.0F.....	45	EH4C4WE.....	106	EMT2VLS6MWE2..	123	EU2L.....	27	EZRU.51.....	31
E4N6WE.....	104	ECEF819.0.....	45	EH4C4WT.....	108	EMT2VLS8MWE2..	123	EU2T.....	27	EZRU.51L.....	31
E4N6WT.....	105	ECEF819.0F.....	45	EH4C6WE.....	106	EMT2VLSF4MWE2..	127	EU4.....	27	EZRU.51T.....	31
E4N8WE.....	104	ECI4UW.2.....	112	EH4C6WT.....	108	EMT2VLSF6MWE2..	127	EU4L.....	27	EZRU.5.....	31
E4N8WT.....	105	ECI4UW.5.....	112	EH4C8WE.....	106	EMT2VLSF8MWE2..	127	EU4T.....	27	EZRU.5L.....	31
E4S.....	193	ECI4UW1.....	112	EH4C8WT.....	108	EMTCS10UW.....	132	EUD.....	192	EZRU.5T.....	31
E4UW.....	115	ECI4UW2.....	112	EH4N10WE.....	104	EMTCS4UW.....	132	EUDA.....	192	EZRU2.5.....	31
E4VL4MWE2.....	110	ECI4W.06.....	112	EH4N10WT.....	105	EMTCS6UW.....	132	EUDB.....	192	EZRU2.5L.....	31
E4VL6MWE2.....	110	ECI4W.1.....	112	EH4N4WE.....	104	EMTCS4UW.....	133	EUDC.....	192	EZRU2.5T.....	31
E4VL8MWE2.....	110	ECI4W.2.....	112	EH4N4WT.....	105	EMTCS6UW.....	133	EUH.....	192	EZRU21.....	31
E4X2.....	193	ECI4W.5.....	112	EH4N6WE.....	104	EMTS.....	191	EUHA.....	192	EZRU21C.....	31
E4X22.....	193	ECMH.....	191	EH4N6WT.....	105	EMTSD4UW.....	132	EUHB.....	192	EZRU21T.....	31
E4X2S.....	193	ECMH2.....	191	EH4N8WE.....	104	EMTSD6UW.....	132	EUHC.....	192	EZRU41.....	31
E6.....	193	ECMHS.....	191	EH4N8WT.....	105	EMTSD8UW.....	132	EUT.....	192	EZRU41C.....	31
E60.....	193	ECMT.....	191	EHS.....	189	EN.5.....	11	EUTA.....	192	EZRU41T.....	31
E602.....	193	ECMT2.....	191	EL10UW.....	116	EN.5KN.....	11	EUTB.....	192	EZRU42.....	31
E60S.....	193	ECMTS.....	191	EL4UW.....	116	EN1.....	11	EUTC.....	192	EZRU42L.....	31
E62.....	193	ECSD10UW.....	132	EL6UW.....	116	EN1K.....	11	EZA1.....	35	EZRU42T.....	31
E65.....	193	ECSD4UW.....	132	EL8UW.....	116	EN2.....	11	EZA2.....	35	EZU.5.....	27
E6UW.....	115	ECSD6UW.....	132	EMH.....	191	EN2SI.....	41	EZBRU.51.....	31	EZU.5L.....	27
E6X2.....	193	ECST4UW.....	133	EMH2.....	191	EN4.....	11	EZBRU.51L.....	31	EZU1.....	27
E6X22.....	193	ECST6UW.....	133	EMHS.....	191	EN6.....	11	EZBRU.51T.....	31	EZU1C.....	27
E6X2S.....	193	ED.....	189	EMT.....	191	EN8.....	11	EZBRU1.5L.....	31	EZU1M.....	27
E8.....	193	ED10UW.....	115	EMT2.....	191	EP.....	189	EZBRU1.5T.....	31	EZU1T.....	27
E82.....	193	ED2.....	189	EMT2CSC10MWE..	124	EP2.....	189	EZBRU2.5L.....	31	EZU2.....	27
E8S.....	193	ED2C14UWE.2.....	103	EMT2CSC12MWE..	124	EP2C14WE.06.....	102	EZBRU2.5T.....	31	EZU2L.....	27
E8UW.....	115	ED2C14UWE.5.....	103	EMT2CSC16MWE..	124	EP2C14WE.1.....	102	EZBRU21.....	31	EZU2T.....	27
E90.....	193	ED2C14UWE1.....	103	EMT2CSC6MWE.....	124	EP2C14WE.2.....	102	EZBRU21T.....	31		
E902.....	193	ED2C14UWE2.....	103	EMT2CSD10MWE..	122	EP2C14WE.5.....	102	EZBRU41.....	31		
E90S.....	193	ED214UWE.2.....	103	EMT2CSD12MWE..	122	EP2NI4WE.06.....	102	EZBRU41T.....	31		
EAOR21.....	219	ED214UWE.5.....	103	EMT2CSD16MWE..	122	EP2NI4WE.1.....	102	EZBRU42.....	31		
EAOR22.....	219	ED214UWE2.....	103	EMT2CSD6MWE.....	122	EP2NI4WE.2.....	102	EZBRU42L.....	31		
EBRU12L.....	30	ED214WUE1.....	103	EMT2CSF10MWE..	126	EP2NI4WE.5.....	102	EZBRU42T.....	31		
EBRU12T.....	30	ED410UWE.....	110	EMT2CSF12MWE..	126	EPC10W.....	113	EZBU1.....	27		
EBRU14L.....	30	ED410UWT.....	111	EMT2CSF16MWE..	126	EPC4W.....	113	EZBU1C.....	27		
EBRU14T.....	30	ED44UWE.....	110	EMT2CSF6MWE.....	126	EPC6W.....	113	EZBU1M.....	27		
EBRU24L.....	30	ED44UWT.....	111	EMT2CST10MWE..	128	EPC8W.....	113	EZBU1T.....	27		
EBU2L.....	27	ED46UWE.....	110	EMT2CST12MWE..	128	EPCI4W.06.....	112	EZBU2.....	27		
EBU2T.....	27	ED46UWT.....	111	EMT2CST16MWE..	128	EPCI4W.1.....	112	EZBU2L.....	27		
EBU4.....	27	ED48UWE.....	110	EMT2CST6MWE.....	128	EPCI4W.2.....	112	EZBU2T.....	27		
EBU4L.....	27	ED48UWT.....	111	EMT2CSTF10MWE..	130	EPCI4W.5.....	112	EZR1.5.....	35		
EBU4T.....	27	ED4C10UWE.....	107	EMT2CSTF12MWE..	130	EPS.....	189	EZR1.5T.....	35		
EC10UW.....	114	ED4C10UWT.....	109	EMT2CSTF16MWE..	130	EQ.....	189	EZR2.5.....	35		
EC10W.....	113	ED4C4UWE.....	107	EMT2CSTF6MWE.....	130	EQ2.....	189	EZR21.....	35		
EC4UW.....	114	ED4C4UWT.....	109	EMT2SC10MWE.....	125	EQS.....	189	EZR21T.....	35		
EC4W.....	113	ED4C6UWE.....	107	EMT2SC12MWE.....	125	ERU21.....	30	EZR41.....	35		
EC6UW.....	114	ED4C6UWT.....	109	EMT2SC16MWE.....	125	ERU21L.....	30	EZR41T.....	35		
EC6W.....	113	ED4C8UWE.....	107	EMT2SC6MWE.....	125	ERU21T.....	30	EZR42.....	35		
EC8UW.....	114	ED4C8UWT.....	109	EMT2SD10MWE.....	123	ERU41.....	30	EZR42T.....	35		
EC8W.....	113	ED4UW.....	115	EMT2SD12MWE.....	123	ERU41T.....	30	EZRF1.5KF-5.....	15		
ECEF111.0.....	43	ED6UW.....	115	EMT2SD16MWE.....	123	ERU42.....	30	EZRF1.5PK-5.....	15		
ECEF111.0F.....	43	ED8UW.....	115	EMT2SD6MWE.....	123	ERU42L.....	30	EZRF1.5TFG-5.....	15		
ECEF1K1.....	45	EDC10UW.....	114	EMT2SF10MWE.....	127	ERU42T.....	30	EZRF1.5V-5.....	15		
ECEF1K1F.....	45	EDC4UW.....	114	EMT2SF12MWE.....	127	ESD4UW.....	132	EZRF2.5KF-5.....	15		
ECEF211.0.....	43	EDC6UW.....	114	EMT2SF16MWE.....	127	ESD6UW.....	132	EZRF2.5PK-5.....	15		
ECEF211.0F.....	43	EDC8UW.....	114	EMT2SF6MWE.....	127	ESD8UW.....	132	EZRF2.5TFG-5.....	15		
ECEF412.1.....	44	EDCI4UW.2.....	112	EMT2ST10MWE.....	129	ET.....	189	EZRF2.5V-5.....	15		
ECEF412.1F.....	44	EDCI4UW.5.....	112	EMT2ST12MWE.....	129	ET2.....	189	EZRF21KF-5.....	15		
ECEF413.0.....	44	EDCI4UW1.....	112	EMT2ST16MWE.....	129	ET4VL4MWE2.....	110	EZRF21PK-5.....	15		
ECEF413.0F.....	44	EDCI4UW2.....	112	EMT2ST6MWE.....	129	ET4VL6MWE2.....	110	EZRF21TFG-5.....	15		
ECEF414.0.....	44	EDL10UW.....	116	EMT2STF10MWE.....	131	ET4VL8MWE2.....	110	EZRF21V-5.....	15		
ECEF414.0F.....	44	EDL4UW.....	116	EMT2STF12MWE.....	131	ETS.....	189	EZRF41KF-5.....	15		
ECEF414.6.....	44	EDL6UW.....	116	EMT2STF16MWE.....	131	EU.5.....	19	EZRF41PK-5.....	15		
ECEF414.6F.....	44	EDL8UW.....	116	EMT2STF6MWE.....	131	EU.5.....	27	EZRF41TFG-5.....	15		

F

F-TCF.....	195
FC10AS1K.....	216
FC10AS1S3.....	216
FC10AS1S4.....	216
FC10AS2K.....	216
FC10AS2S3.....	216
FC10AS2S4.....	216
FC10AS3K.....	216
FC10AS3S3.....	216
FC10AS3S4.....	216
FC10AS4K.....	216
FC10AS4S3.....	216
FC10AS4S4.....	216
FC10AS5K.....	216
FC10AS5S3.....	216
FC10AS5S4.....	216
FC10AS6K.....	216
FC10AS6S3.....	216
FC10AS6S4.....	216
FC10AV1K.....	216
FC10AV1S3.....	216
FC10AV1S4.....	216
FC10AV2K.....	216
FC10AV5K.....	216
FC10AV2S4.....	216
FC10AV3K.....	216
FC10AV3S3.....	216
FC10AV3S4.....	216
FC10AV4K.....	216
FC10AV4S3.....	216
FC10AV4S4.....	216
FC10AV5K.....	216
FC10AV5S3.....	216
FC10AV5S4.....	216
FC10AV6K.....	216

INDEX BY PRODUCT NUMBER

FC10AV6S3 — MT1XCS6

FC10AV6S3..... 216	FC30AV3S3..... 217	FS.8PK-5 16	H	IZR21 34	JR-TD-6008..... 89
FC10AV6S4..... 216	FC30AV3S4..... 217	FS1.2-5..... 16	HA1 202	IZR21C..... 34	JR-TD-6009..... 89
FC10SS1K 216	FC30AV4K 217	FS1.25-5..... 16	HA1T..... 202	IZR21CF..... 34	JR-TD-6010..... 89
FC10SS1S3 216	FC30AV4S3..... 217	FS1.25PK-5..... 16	HA2..... 202	IZR21F..... 34	JR-TD-6011..... 89
FC10SS1S4 216	FC30AV4S4..... 217	FS1.25V1-5..... 16	HA3..... 202	IZR21L..... 34	
FC10SS2K 216	FC30SS1K 217	FS1.2PK-5..... 16	HA6..... 202	IZR21LF..... 34	L
FC10SS2S3 216	FC30SS1S3..... 217	FS1.2V1-5..... 16	HA6..... 202	IZR21T..... 34	L4UW 116
FC10SS2S4 216	FC30SS1S4..... 217	FS1.3-5..... 16	HB..... 202	IZR41..... 34	L6UW 116
FC10SS3K 216	FC30SS2K 217	FS1.35-R10..... 18	HB1N..... 202	IZR41F..... 34	L8UW 116
FC10SS3S3 216	FC30SS2S3..... 217	FS1.3PK-5..... 16	HBS..... 202	IZR42..... 34	LNR-CIS4-B-5..... 245
FC10SS3S4 216	FC30SS2S4..... 217	FS1.3V1-5..... 16	HCE1..... 203	IZR42F..... 34	LNR-DGS4-5..... 245
FC10SS4K 216	FC30SS3K 217	FS1.4-5..... 16	HCE2..... 203	IZR42L..... 34	LNR-GS2-5..... 245
FC10SS4S3 216	FC30SS3S3..... 217	FS1.45-R10..... 18	HCEB..... 203	IZR42LF..... 34	LNR-GS4-5..... 245
FC10SS4S4 216	FC30SS3S4..... 217	FS1.4PK-5..... 16	HCEC..... 203		LNR-HP2-5..... 245
FC10SS5K 216	FC30SS4K 217	FS1.4V1-5..... 16	HKS..... 210	J	LNR-HP4-5..... 245
FC10SS5S3 216	FC30SS4S3..... 217	FS1.5-5..... 16	HKS..... 54	JR-201540..... 71	LNR-VAR2-5..... 245
FC10SS5S4 216	FC30SS4S4..... 217	FS1.5PK-5..... 16	HP2..... 226	JR-26501..... 77	LNR-VAR3.4-5..... 245
FC10SS6K 216	FC30SS5K 217	FS1.5V1-5..... 16	HP2-220..... 226	JR-26502..... 77	LNR-VAR4-5..... 245
FC10SS6S3 216	FC30SV1K 217	FS1.75-R10..... 18	HPM..... 227	JR-26503..... 77	LNR-VARGS2-5..... 245
FC10SS6S4 216	FC30SV1S3..... 217	FS1.8-5..... 16	HPM-220..... 227	JR-26504..... 77	LZN.5-10..... 10
FC10SV1K 216	FC30SV1S4..... 217	FS1.8V1-5..... 16	HSSA..... 198	JR-32178..... 80	LZN.5FPK-10..... 63
FC10SV1S3 216	FC30SV2K 217	FS1.9-5..... 16	HVE2..... 201	JR-32179..... 80	LZN1-10..... 10
FC10SV1S4 216	FC30SV2S3..... 217	FS1.9PK-5..... 16	HVE3..... 201	JR-357090-5..... 88	LZN1PK-10..... 63
FC10SV2K 216	FC30SV2S4..... 217	FS1.9V1-5..... 16	HVE6..... 201	JR-357180-5..... 88	LZN2-10..... 10
FC10SV2S3 216	FC30SV3K 217	FS11.0-5..... 16	HVEA..... 201	JR-35P..... 67	LZN4-10..... 10
FC10SV2S4 216	FC30SV3S3..... 217	FS11.0PK-5..... 16	HVEAN..... 201	JR-367008-10..... 80	LZNF1KF-5..... 63
FC10SV3K 216	FC30SV3S4..... 217	FS11.0V1-5..... 16	HVEB..... 201	JR-367008-2..... 80	LZNF1PK-5..... 63
FC10SV3S3 216	FC30SV4K 217	FS11.0PK-5..... 16	HVEBN..... 201	JR-367008-20..... 80	LZNF1PKG-5..... 63
FC10SV3S4 216	FC30SV4S3..... 217	FS1L.2-5..... 17	HVEC..... 201	JR-367016-10..... 80	LZP.5FPK..... 64
FC10SV4K 216	FC30SV4S4..... 217	FS1L.2PK-5..... 17	HWSC-SC8-6..... 205	JR-367016-2..... 80	LZP1..... 11
FC10SV4S3 216	FC31AV1..... 217	FS1L.4-5..... 17	HWSC-SC8-7..... 205	JR-367016-20..... 80	LZP1H..... 11
FC10SV4S4 216	FP1Z3M21..... 37	FS1L.4PK-5..... 17	HWSC-SC8-8B..... 205	JR-55010-5..... 66	LZP1PK..... 64
FC10SV5K 216	FP1Z3M22..... 37	FS1L.5-5..... 17	HWSC-SC8-8TDH..... 205	JR-55011-5..... 66	LZP1PK..... 71
FC10SV5S3 216	FP1Z3M24..... 37	FS1L.5PK-5..... 17		JR-55012-5..... 66	LZP2..... 11
FC10SV5S4 216	FP1Z3M41..... 37	FS1L.8-5..... 17	I	JR-55013-5..... 66	LZP2H..... 11
FC10SV6K 216	FP1Z3M42..... 37	FS1L.8PK-5..... 17	I-21014-01..... 203	JR-55014-5..... 66	
FC10SV6S3 216	FP1Z3M44..... 37	FS1L.8PK-5..... 17	I-21208-05..... 202	JR-55015-5..... 66	M
FC10SV6S4 216	FP2Z3M21..... 37	FS1L1.0-5..... 17	I-21208-06..... 202	JR-55016-12..... 66	MRX.5PK..... 23
FC22AS1K 217	FP2Z3M22..... 37	FS1L1.0PK-5..... 17	I-21208-32..... 202	JR-55020-5..... 66	MRX.5S6..... 23
FC22AS1S3 217	FP2Z3M24..... 37	FS1R.15PK-5..... 17	I-21208-33..... 202	JR-55021-5..... 66	MRX1PK..... 23
FC22AS1S4 217	FP2Z3M41..... 37	FS1R.2-5..... 17	I-22239..... 197	JR-55022-5..... 66	MRX1S6..... 23
FC22AV1K 217	FP2Z3M42..... 37	FS1R.2PK-5..... 17	I-22897-02..... 189	JR-55023-5..... 66	MRY.5PK..... 23
FC22AV1S3 217	FP2Z3M44..... 37	FS1R.4-5..... 17	I-22897-02..... 191	JR-55024-5..... 66	MRY.5S6..... 23
FC22AV1S4 217	FPEA22..... 39	FS1R.4PK-5..... 17	I-22897-03..... 189	JR-55025-5..... 66	MRY1PK..... 23
FC22SS1K 217	FPEA24..... 39	FS1R.5-5..... 17	I-22897-03..... 191	JR-5508-5..... 66	MRY1S6..... 23
FC22SS1S3 217	FPEA42..... 39	FS1R.5PK-5..... 17	I-22897-04..... 189	JR-797..... 90	MSVA-110VAC..... 198
FC22SS1S4 217	FPEA44..... 39	FS1R.8-5..... 17	I-22897-04..... 191	JR-798..... 90	MSVA-12VDC..... 198
FC22SV1K 217	FPEA82..... 39	FS1R.8PK-5..... 17	I-22897-04..... 191	JR-9000-0001..... 81	MSVA-220VAC..... 198
FC22SV1S3 217	FPEA84..... 39	FS1R1.0-5..... 17	I-22897-05..... 189	JR-9000-0006..... 81	MSVA-24VAC..... 198
FC22SV1S4 217	FPEA84..... 39	FS1R1.0PK-5..... 17	I-22897-05..... 191	JR-9000-0520..... 79	MSVA-24VDC..... 198
FC30AS1K 217	FPZA21..... 38	FS-A04018-040B..... 236	I-22897-06..... 189	JR-9000-0530..... 79	MT.5CHK..... 23
FC30AS1S3 217	FPZA22..... 38	FS-A06032-025B..... 236	I-22897-06..... 191	JR-9000-0602..... 79	MT.5CKF..... 23
FC30AS1S4 217	FPZA22L..... 38	FSKZU1..... 18	I-22897-08..... 189	JR-9000-0640..... 79	MT.5CPK..... 23
FC30AS2K 217	FPZA41..... 38	FSL.2-5..... 17	I-22897-08..... 191	JR-9001-5..... 90	MT.5CS6..... 23
FC30AS2S3 217	FPZA42..... 38	FSL.4-5..... 17	I-23572HP2..... 226	JR-T-5804..... 89	MT.5CTI..... 23
FC30AS2S4 217	FPZA44L..... 38	FSL.5-5..... 17	I-23572NP2..... 226	JR-T-5999..... 89	MT.5XCHC..... 23
FC30AS3K 217	FPZA81..... 38	FSMUA1.5..... 20	I4UWE.2..... 103	JR-T-6000..... 89	MT.5XCKF..... 23
FC30AS3S3 217	FPZA82..... 38	FSMUA1.5L..... 20	I4UWE.5..... 103	JR-T-6001..... 89	MT.5XCPK..... 23
FC30AS3S4 217	FPZA82L..... 38	FSMUA1.5M..... 20	I4UWE1..... 103	JR-T-6002..... 89	MT.5XCS6..... 23
FC30AS4K 217	FPZA84L..... 38	FSQ1..... 18	I4UWE2..... 103	JR-T-6003..... 89	MT.5XCTI..... 23
FC30AS4S3 217	FRK1..... 54	FSR.25-5..... 17	ITC10399..... 203	JR-T-60031..... 89	MT1CHC..... 23
FC30AS4S4 217	FS.25-5..... 16	FSR.25-5..... 17	ITC10399-220..... 203	JR-T-60013..... 89	MT1CKF..... 23
FC30AV1K 217	FS.25PK-5..... 16	FSR.4-5..... 17	IZERA1.5..... 21	JR-T-98017..... 89	MT1CPK..... 23
FC30AV1S3 217	FS.25V1-5..... 16	FSR.4-5..... 17	IZERA1.5C..... 21	JR-T-98025..... 89	MT1CS6..... 23
FC30AV1S4 217	FS.4-5..... 16	FSR.5-5..... 17	IZERA1.5M..... 21	JR-T-98050..... 89	MT1CTI..... 23
FC30AV2K 217	FS.4PK-5..... 16	FSZA-HP..... 19	IZR1.5..... 34	JR-T-98075..... 89	MT1XCHC..... 23
FC30AV2S3 217	FS.4V1-5..... 16	FSZNA-HP..... 19	IZR1.5F..... 34	JR-T-98200..... 89	MT1XCKF..... 23
FC30AV2S4 217	FS.5-5..... 16		IZR1.5L..... 34	JR-TD-5804..... 89	MT1XCPK..... 23
FC30AV3K 217	FS.5PK-5..... 16		IZR1.5LF..... 34	JR-TD-6007..... 89	MT1XCS6..... 23
	FS.5V1-5..... 16		IZR1.5T..... 34		

INDEX BY PRODUCT NUMBER

MT1XCTI — SSAL8UW

MT1XCTI	23	N	PS-050043.....	249	PZA82L	38	SL20KUW 111,115,116	SSAC10WE	106
MU.5CHC.....	23	NP2.....	PS-050044.....	249	PZA84L	38	SL20NW.....	SSAC10WT	108
MU.5CKF.....	23	NP2-220.....	PS-050045.....	249	R		SL20UW.....	SSAC4UW	114
MU.5CPK.....	23	NPM	PS-050051.....	249	RAD.....	204	SL250CSTP	SSAC4UWE	107
MU.5CS6.....	23	NPM-220.....	PS-050052.....	249	RF1.5KF-5	15	SL250CSTUW.....	SSAC4UWT.....	109
MU.5CTI.....	23	O	PS-050053.....	249	RF1.5PK-5	15	SL250CUW 107,109,114	SSAC4W.....	113
MU.5XCHC.....	23	OEW.....	PS-050054.....	249	RF1.5V-5	15	SL250CW. 106,108,113	SSAC4WE	106
MU.5XCKF.....	23	OEW-2	PS-050055.....	249	RF2.5KF-5	15	SL250NW	SSAC4WT	108
MU.5XCPK.....	23	OEW-3	PS-050056.....	249	RF2.5PK-5	15	SL250STP	SSAC6UW	114
MU.5XCS6.....	23	OR	PS-123050.....	250	RF2.5TFG-5	15	SL250UW 111,115,116	SSAC6UWE.....	107
MU.5XCTI.....	23	ORMP.....	PS-123050R	250	RF2.5V-5	15	SL25CSTUW.....	SSAC6UWT.....	109
MU1CHC.....	23	ORT	PS-160021.....	250	RF21KF-5.....	15	SL25CUW 107,109,114	SSAC6W.....	113
MU1CKF.....	23	ORTMP.....	PS-160021R	250	RF21PK-5.....	15	SL25CW... 106,108,113	SSAC6WE	106
MU1CPK.....	23	P	PS-160022.....	250	RF21TFG-5	15	SL25NW.....	SSAC6WT	108
MU1CS6.....	23	P100-1	PS-160022R	250	RF21V-5.....	15	SL25UW.....	SSAC8UW.....	114
MU1CTI.....	23	P100-2	PS-160023.....	250	RF41KF-5.....	15	SL2CW... 106,108,113	SSAC8UWE.....	107
MU1XCHC.....	23	P100-2	PS-160023R	250	RF41PK-5.....	15	SL2KCSTP	SSAC8UWT.....	109
MU1XCKF.....	23	P200-1	PS-160024.....	250	RF41TFG-5	15	SL2KCUW	SSAC8W.....	113
MU1XCPK.....	23	P200-2	PS-160024R	250	RF41V-5.....	15	SL2KCUW 107,109,114	SSAC8WE	106
MU1XCS6.....	23	P300-1	PS-160025.....	250	RF42KF-5.....	15	SL2KCW.. 106,108,113	SSAC8WT	108
MU1XCTI.....	23	P300-2	PS-160025R	250	RF42PK-5.....	15	SL2KSTP.....	SSAC14UW.2.....	112
MX.5CHC.....	23	P310-1	PS-160221.....	250	RF42TFG-5	15	SL2KSTP.....	SSAC14UW.5.....	112
MX.5CKF.....	23	P310-2	PS-160221R	250	RF42V-5.....	15	SL2KUW.. 111,115,116	SSAC14UW1	112
MX.5CPK.....	23	P350-1	PS-160222.....	250	S		SL2NW.....	SSAC14UW2	112
MX.5CS6.....	23	P350-2	PS-160222R	250	SD4UW	132	SL3CUW.....	SSAC14UWE.....	103
MX.5CTI.....	23	P400-1	PS-160223.....	250	SD6UW	132	SL500CSTP	SSAC14UWE.2.....	103
MX.5XCHC.....	23	P400-2	PS-160223R	250	SD8UW	132	SL500CSTUW.....	SSAC14UWE.5.....	103
MX.5XCKF.....	23	P500-1	PS-160224.....	250	SEAL1-HP	19	SL500CUW	SSAC14UWE1	103
MX.5XCPK.....	23	P600-1	PS-160224R	250	SFV	213	SL500CUW	SSAC14UWE2	103
MX.5XCS6.....	23	P600-2	PS-160225.....	250	SFVL	213	SL500CW.....	SSAC14W.06	112
MX.5XCTI.....	23	P700-1	PS-160225R	250	SFVO.....	213	SL500CW.....	SSAC14W.1	112
MX1CHC.....	23	P700-2	PS-614158.....	251	SFVOHT.....	213	SL500NW	SSAC14W.2	112
MX1CKF.....	23	PCL412.....	PS-614158.....	81	SFVOL.....	213	SL500STP	SSAC14W.5	112
MX1CPK.....	23	PCL415.....	PS-614160.....	251	SI4G.....	41	SL500UW 111,115,116	SSAC14WE.06	102
MX1CS6.....	23	PCS412F.....	PS-614160.....	81	SL100CSTP	128	SL50CSTP	SSAC14WE.1	102
MX1XCHC.....	23	PCS415F.....	PS-614160.....	81	SL100CSTUW.....	133	SL50CSTUW	SSAC14WE.2	102
MX1XCKF.....	23	PEA22.....	PS-614161.....	251	SL100CUW 107,109,114	133	SL50CUW.. 106,108,113	SSAC14WE.5	102
MX1XCPK.....	23	PEA24.....	PS-614161.....	81	SL100CUW 106,108,113	133	SL50CW... 106,108,113	SSACSC10MWE.....	124
MX1XCS6.....	23	PEA42.....	PS-614163.....	81	SL100NW	104,105	SL50NW.....	SSACSC12MWE.....	124
MX1XCTI.....	23	PEA44.....	PS-614170.....	251	SL100STP	129	SL50UW.....	SSACSC16MWE.....	124
MY.5CHC.....	23	PEA82.....	PS-614170.....	81	SL100UW 111,115,116	129	SL5CUW.. 107,109,114	SSACSC6MWE.....	124
MY.5CKF.....	23	PEA84.....	PS-614250.....	81	SL100UW 106,108,113	129	SL5CW... 106,108,113	SSACSD10MWE.....	122
MY.5CPK.....	23	PFAF	PS-614250.....	81	SL100NW	104,105	SL5KSTP	SSACSD10UW	132
MY.5CS6.....	23	PFC2	PS-631201.....	251	SL100STP	129	SL5KCUW 107,109,114	SSACSD12MWE.....	122
MY.5CTI.....	23	PFC4	PS-631202.....	251	SL100UW 111,115,116	133	SL5KCUW 107,109,114	SSACSD16MWE.....	122
MY.5XCHC.....	23	PFW36	PS-631203.....	251	SL10CSTUW	133	SL5KCW.. 106,108,113	SSACSD4UW	132
MY.5XCKF.....	23	PFW60	PS-631204.....	251	SL10CUW 107,109,114	133	SL5KSTP.....	SSACSD6MWE.....	122
MY.5XCPK.....	23	PFW90	PS-631205.....	251	SL10CW.. 106,108,113	133	SL5KUW.. 111,115,116	SSACSD6UW	132
MY.5XCS6.....	23	PM	PS-644350.....	251	SL10KSTP	128	SL5NW	SSACSD10MWE.....	126
MY.5XCTI.....	23	PR50A15E2.....	PS-644850.....	251	SL10KSTUW.....	133	SOMAP.....	SSACSF12MWE.....	126
MY1CHC.....	23	PR50A15Z1.....	PS-654050.....	251	SL10KCUW 107,109,114	133	SOMAPPF.....	SSACSF16MWE.....	126
MY1CKF.....	23	PR50A15Z2.....	PS-654051.....	251	SL10KCUW 106,108,113	133	SOMAW.....	SSACSF6MWE	126
MY1CPK.....	23	PR50A30E2.....	PS-943050.....	249	SL10KSTP	129	SOUTH.....	SSACST10MWE.....	128
MY1CS6.....	23	PR50A30Z1.....	PS-943051.....	249	SL10KUW 111,115,116	129	SPSS40	SSACST12MWE.....	128
MY1CTI.....	23	PR50A30Z2.....	PS-943052.....	249	SL10NW.....	104,105	SSA10UW	SSACST16MWE.....	128
MY1XCHC.....	23	PR50A60E2.....	PS-943060.....	249	SL10UW.....	111,115	SSA10UWE.....	SSACST4UW.....	133
MY1XCKF.....	23	PR50A60Z1.....	PS-943061.....	249	SL15CSTUW	133	SSA10UWT.....	SSACST6MWE	128
MY1XCPK.....	23	PR50A60Z2.....	PS-943062.....	249	SL15CUW 107,109,114	133	SSA4UW	SSACST6UW.....	133
MY1XCS6.....	23	PV	PS-943062.....	249	SL15CW.. 106,108,113	133	SSA4UWE	SSACSTF10MWE.....	130
MY1XCTI.....	23	PS-050023.....	PS-943062.....	249	SL15NW.....	104,105	SSA4UWT	SSACSTF12MWE.....	130
MZN1-10.....	10	PS-050024.....	PV	55	SL15UW.....	111,115	SSA6UW	SSACSTF16MWE.....	130
MZN1PK-10.....	63	PS-050025.....	PZA21.....	38	SL1KCSTP	128	SSA6UWE	SSACSTF6MWE.....	130
MZNF1KF-5.....	63	PS-050031.....	PZA21T.....	38	SL1KCUW	133	SSA6UWT	SSAI4UWE.2.....	103
MZNF1PK-5.....	63	PS-050032.....	PZA22.....	38	SL1KCUW 107,109,114	133	SSA8UW	SSAI4UWE.5.....	103
MZNF1PKG-5.....	63	PS-050033.....	PZA41.....	38	SL1KCUW 107,109,114	133	SSA8UWE	SSAI4UWE1	103
MZP1PK.....	64	PS-050034.....	PZA42.....	38	SL1KCW.. 106,108,113	133	SSA8UWT	SSAI4UWE2	103
MZP1PK.....	71	PS-050035.....	PZA42L.....	38	SL1KSTP.....	129	SSA8UWT	SSAL10UW	116
		PS-050036.....	PZA44L.....	38	SL1KUW.. 111,115,116	133	SSA10UW	SSAL4UW	116
			PZA81.....	38	SL20CSTUW	133	SSAC10UW.....	SSAL6UW	116
			PZA82.....	38	SL20CUW 107,109,114	133	SSAC10UWT.....	SSAL8UW	116
					SL20CW.. 106,108,113	133	SSAC10W		

INDEX BY PRODUCT NUMBER

SSAN10WE — VSH

SSAN10WE.....	104	T100C40-100.....	93	T20N20-10.....	92	T50N10D.....	92	TEFNI.502.....	87	TSS.505.....	91
SSAN10WT.....	105	T100C40-50.....	93	T20N20-100.....	92	T50N20-10.....	92	TEFNI.504.....	87	TSS.507.....	91
SSAN4WE.....	104	T100C40D.....	93	T20N20-50.....	92	T50N20-100.....	92	TEFNI.505.....	87	TSS.510.....	91
SSAN4WT.....	105	T100N10-10.....	92	T20N20D.....	92	T50N20-50.....	92	TEFNI.507.....	87	TSS.520.....	91
SSAN6WE.....	104	T100N10-100.....	92	T20N5-10.....	92	T50N20D.....	92	TEFNI.510.....	87	TSS105.....	91
SSAN6WT.....	105	T100N10-50.....	92	T20N5-100.....	92	T50N5-10.....	92	TEFNI.512.....	87	TSS110.....	91
SSAN8WE.....	104	T100N10D.....	92	T20N5-50.....	92	T50N5-100.....	92	TEFNI.515.....	87	TSS115.....	91
SSAN8WT.....	105	T100N20-10.....	92	T20N5D.....	92	T50N5-50.....	92	TEFNI.520.....	87	TSS120.....	91
SSANI4WE.06.....	102	T100N20-100.....	92	T300-1.....	247	T50N5D.....	92	TEFNI120.....	87	TSS126.....	91
SSANI4WE.1.....	102	T100N20-50.....	92	T300-2.....	247	T5C10-10.....	93	TEFNI130.....	87	TSS130.....	91
SSANI4WE.2.....	102	T100N20D.....	92	T30C10-10.....	93	T5C10-100.....	93	TEFNI140.....	87	TSS140.....	91
SSANI4WE.5.....	102	T10C10-10.....	93	T30C10-100.....	93	T5C10-50.....	93	TEMPLATE1.....	55, 211	TSS230.....	91
SSASC10MWE.....	125	T10C10-100.....	93	T30C10-50.....	93	T5C10D.....	93	TFEP110-10M.....	90	TSS240.....	91
SSASC12MWE.....	125	T10C10-50.....	93	T30C10D.....	93	T5C20-10.....	93	TFEP110-25M.....	90	TSS260.....	91
SSASC16MWE.....	125	T10C10D.....	93	T30C20-10.....	93	T5C20-100.....	93	TFEP110-5M.....	90	TSS267.....	91
SSASC6MWE.....	125	T10C20-10.....	93	T30C20-100.....	93	T5C20-50.....	93	TFEP120-10M.....	90	TSS285.....	91
SSASD10MWE.....	123	T10C20-100.....	93	T30C20-50.....	93	T5C20D.....	93	TFEP120-25M.....	90	TTF106-10M.....	90
SSASD12MWE.....	123	T10C20-50.....	93	T30C20D.....	93	T5C30-10.....	93	TFEP120-5M.....	90	TTF106-25M.....	90
SSASD16MWE.....	123	T10C20D.....	93	T30C30-10.....	93	T5C30-100.....	93	TFEP130-10M.....	90	TTF106-5M.....	90
SSASD4UW.....	132	T10C30-10.....	93	T30C30-100.....	93	T5C30-50.....	93	TFEP130-25M.....	90	TTF110-10M.....	90
SSASD6MWE.....	123	T10C30-100.....	93	T30C30-50.....	93	T5C30D.....	93	TFEP130-5M.....	90	TTF110-25M.....	90
SSASD6UW.....	132	T10C30-50.....	93	T30C30D.....	93	T5C40-10.....	93	TFEP260-10M.....	90	TTF110-5M.....	90
SSASD8UW.....	132	T10C30D.....	93	T30C40-10.....	93	T5C40-100.....	93	TFEP260-25M.....	90	TTF115-10M.....	90
SSASF10MWE.....	127	T10C40-10.....	93	T30C40-100.....	93	T5C40-50.....	93	TFEP260-5M.....	90	TTF115-25M.....	90
SSASF12MWE.....	127	T10C40-100.....	93	T30C40-50.....	93	T5C40D.....	93	THC130.....	91	TTF115-5M.....	90
SSASF16MWE.....	127	T10C40-50.....	93	T30C40D.....	93	T5C5-10.....	93	THC270.....	91	TTF120-10M.....	90
SSASF6MWE.....	127	T10C40D.....	93	T30C5-10.....	93	T5C5-100.....	93	TINCO261.....	91	TTF120-25M.....	90
SSAST10MWE.....	129	T10C5-10.....	93	T30C5-100.....	93	T5C5-50.....	93	TINCO282.....	91	TTF120-5M.....	90
SSAST12MWE.....	129	T10C5-100.....	93	T30C5-50.....	93	T5C5D.....	93	TNI.507.....	91	TTF130-10M.....	90
SSAST16MWE.....	129	T10C5-50.....	93	T30C5D.....	93	T5N10-10.....	92	TNI.510.....	91	TTF130-25M.....	90
SSAST6MWE.....	129	T10C5D.....	93	T30N10-10.....	92	T5N10-100.....	92	TNI.520.....	91	TTF130-5M.....	90
SSASTF10MWE.....	131	T10N10-10.....	92	T30N10-100.....	92	T5N10-50.....	92	TNI105.....	91	TTF230-10M.....	90
SSASTF12MWE.....	131	T10N10-100.....	92	T30N10-50.....	92	T5N10D.....	92	TNI107.....	91	TTF230-25M.....	90
SSASTF16MWE.....	131	T10N10-50.....	92	T30N10D.....	92	T5N20-10.....	92	TNI110.....	91	TTF230-5M.....	90
SSASTF6MWE.....	131	T10N10D.....	92	T30N20-10.....	92	T5N20-100.....	92	TNI120.....	91	TTF260-10M.....	90
SSAVL4MWE2.....	110	T10N20-10.....	92	T30N20-100.....	92	T5N20-50.....	92	TNI130.....	91	TTF260-25M.....	90
SSAVL6MWE2.....	110	T10N20-100.....	92	T30N20-50.....	92	T5N20D.....	92	TNI140.....	91	TTF260-5M.....	90
SSAVL8MWE2.....	110	T10N20-50.....	92	T30N20D.....	92	T5N5-10.....	92	TNI285.....	91	TTF285-10M.....	90
SSAVLSC4MWE2.....	125	T10N20D.....	92	T30N5-10.....	92	T5N5-100.....	92	TPK.102.....	88	TTF285-25M.....	90
SSAVLSC6MWE2.....	125	T10N5-10.....	92	T30N5-100.....	92	T5N5-50.....	92	TPK.104.....	88	TTF285-5M.....	90
SSAVLSC8MWE2.....	125	T10N5-100.....	92	T30N5-50.....	92	T5N5D.....	92	TPK.105.....	88	TTZ110-10M.....	90
SSAVLSD10MWE2.....	123	T10N5-50.....	92	T30N5D.....	92	T700-1.....	247	TPK.106.....	88	TTZ110-25M.....	90
SSAVLSD4MWE2.....	123	T10N5D.....	92	T400-1.....	247	T700-2.....	247	TPK.502-10.....	88	TTZ110-5M.....	90
SSAVLSD6MWE2.....	123	T200-1.....	247	T400-2.....	247	TCD2-C.....	227	TPK.502-100.....	88	TTZ120-10M.....	90
SSAVLSD8MWE2.....	123	T200-2.....	247	T401-1.....	247	TCD2-C-220.....	227	TPK.502-25.....	88	TTZ120-25M.....	90
SSAVLSF4MWE2.....	127	T20C10-10.....	93	T401-2.....	247	TCD2-NIFE.....	227	TPK.505-10.....	88	TTZ120-5M.....	90
SSAVLSF6MWE2.....	127	T20C10-100.....	93	T50C10-10.....	93	TCD2-NIFE-220.....	227	TPK.505-100.....	88	TTZ130-10M.....	90
SSAVLSF8MWE2.....	127	T20C10-50.....	93	T50C10-100.....	93	TCD2-NIFED.....	227	TPK.505-25.....	88	TTZ130-25M.....	90
SVI.....	197	T20C10D.....	93	T50C10-50.....	93	TCD2-NIFED-220.....	227	TPK.510-10.....	88	TTZ130-5M.....	90
SVI-220.....	197	T20C20-10.....	93	T50C10D.....	93	TCD2-NIFE-FA.....	227	TPK.510-100.....	88	TTZ260-10M.....	90
SWH4.....	210	T20C20-100.....	93	T50C20-10.....	93	TCD2-NIFE-FA.....	227	TPK.510-25.....	88	TTZ260-25M.....	90
SWH4.....	54	T20C20-50.....	93	T50C20-100.....	93	TCEF1.5.5C.....	46	TPK.515-10.....	88	TTZ260-5M.....	90
T		T20C20D.....	93	T50C20-50.....	93	TCEF1.5.5T.....	46	TPK.515-100.....	88		
T100-1.....	247	T20C30-10.....	93	T50C20D.....	93	TCEF111.....	46	TPK.515-25.....	88		
T100-2.....	247	T20C30-100.....	93	T50C30-10.....	93	TCEF211.....	46	TPK106-10.....	88	V-SV-D32-110VAC.....	198
T100C10-10.....	93	T20C30-50.....	93	T50C30-100.....	93	TCEF211T.....	46	TPK106-100.....	88	V-SV-D32-220VAC.....	198
T100C10-100.....	93	T20C30D.....	93	T50C30-50.....	93	TCEF411.....	46	TPK106-25.....	88	V-SV-D32-24VUC.....	198
T100C10-50.....	93	T20C40-10.....	93	T50C30D.....	93	TCEF411C.....	46	TPK110-10.....	88	V-SV-S42-120VAC.....	198
T100C10D.....	93	T20C40-100.....	93	T50C40-10.....	93	TCEF411T.....	46	TPK110-100.....	88	V-SV-S42-220VAC.....	198
T100C20-10.....	93	T20C40-50.....	93	T50C40-100.....	93	TCEF421.....	46	TPK110-25.....	88	V-SV-S42-24VUC.....	198
T100C20-100.....	93	T20C40D.....	93	T50C40-50.....	93	TCEF611.....	46	TPK120-10.....	88	VISF.5FPK.....	40
T100C20-50.....	93	T20C5-10.....	93	T50C40D.....	93	TCEF611T.....	46	TPK120-100.....	88	VISF-1.....	40
T100C20D.....	93	T20C5-50.....	93	T50C5-10.....	93	TCEF811.....	46	TPK120-25.....	88	VISF-2.....	40
T100C30-10.....	93	T20C5D.....	93	T50C5-100.....	93	TCEF811T.....	46	TPK130-10.....	88	VISF-A.....	40
T100C30-100.....	93	T20N10-10.....	92	T50C5-50.....	93	TEFNI.101.....	87	TPK130-100.....	88	VISL-1.....	40
T100C30-50.....	93	T20N10-100.....	92	T50C5D.....	93	TEFNI.102.....	87	TPK130-25.....	88	VISL-1.....	40
T100C30D.....	93	T20N10-50.....	92	T50N10-10.....	92	TEFNI.104.....	87	TPK260-10.....	88	VISL-1H.....	40
T100C40-10.....	93	T20N10D.....	92	T50N10-100.....	92	TEFNI.105.....	87	TPK260-100.....	88	VISL-2.....	40
				T50N10-50.....	92	TEFNI.110.....	87	TPK260-25.....	88	VSH.....	211

INDEX BY PRODUCT NUMBER

WMMA — ZXLTA41

W	ZBRUFR1.5F 51	ZF5TF-10..... 13	ZF8PK-10..... 63	ZRU1.5FPK 65	ZU1L..... 26
WMMA..... 208	ZBRUFR21..... 52	ZF5TFG-10..... 13	ZF8TF-10..... 13	ZRU1.5L..... 29	ZU1M..... 26
WMMA10..... 208	ZBRUFR21F..... 51	ZF5TI..... 12	ZF8TFG-10..... 13	ZRU1.5LFPK..... 65	ZU1MFPK..... 65
WMMASO..... 204	ZBRUFR41..... 52	ZF5V1-5..... 13	ZF8V1-5..... 13	ZRU1.5T..... 29	ZU1MPK..... 65
X	ZBRUFR41F..... 51	ZF5V1-5..... 16	ZF8V-5..... 13	ZRU1.5TFPK..... 65	ZU1PK..... 65
XLZN1-10..... 10	ZBRUFR42..... 52	ZF5V-5..... 13	ZGF5PK..... 59	ZRU1.5XC..... 29	ZU1T..... 26
XLZN2-10..... 10	ZBRUFR42F..... 51	ZF5V-5..... 16	ZGF5PK-10..... 63	ZRU2.5..... 29	ZU1TFPK..... 65
Z	ZBU.5..... 26	ZF1-10..... 12	ZGF1PK-10..... 63	ZRU2.5FPK..... 65	ZU1TPK..... 65
Z10M1..... 33	ZBU.5FPK..... 65	ZF1B-10..... 12	ZLA-5..... 40	ZRU2.5L..... 29	ZU1XC..... 26
Z10M1PK..... 33	ZBU.5L..... 26	ZF1FEP-10..... 13	ZLA-1..... 40	ZRU2.5LFPK..... 65	ZU2..... 26
Z10M2..... 33	ZBU.5LFPK..... 65	ZF1GP-10..... 12	ZLA-2..... 40	ZRU2.5T..... 29	ZU2L..... 26
Z12M1..... 33	ZBU.5T..... 26	ZF1GV-5..... 13	ZLCA1PK..... 77	ZRU2.5TFPK..... 65	ZU2LPK..... 65
Z12M1PK..... 33	ZBU.5TFPK..... 65	ZF1HC..... 12	ZLTA41..... 36	ZRU21..... 29	ZU2PK..... 65
Z12M2..... 33	ZBU.5XC..... 26	ZF1NI..... 12	ZN.5..... 23	ZRU21C..... 29	ZU2T..... 26
Z14M1..... 33	ZBU1..... 26	ZF1PFA-10..... 13	ZN.5-10..... 10	ZRU21CFPK..... 65	ZU2TPK..... 65
Z14M1PK..... 33	ZBU1C..... 26	ZF1PK-10..... 63	ZN.5FPK..... 23	ZRU21FPK..... 65	ZU4..... 26
Z16M1PK..... 33	ZBU1CFPK..... 65	ZF1S6-10..... 12	ZN.5FPK-10..... 63	ZRU21LFPK..... 65	ZU4L..... 26
Z4M1PK..... 33	ZBU1CPK..... 65	ZF1TF-10..... 13	ZN1..... 10	ZRU21T..... 29	ZU4T..... 26
Z4M2..... 33	ZBU1FPK..... 65	ZF1TFG-10..... 13	ZN1-10..... 10	ZRU21TFPK..... 65	ZUF1..... 50
Z6M1..... 33	ZBU1L..... 26	ZF1TI..... 12	ZN1FPK..... 23	ZRU41..... 29	ZUF2..... 50
Z6M1PK..... 33	ZBU1M..... 26	ZF1V1-5..... 13	ZN1FPK-10..... 63	ZRU41C..... 29	ZUF4..... 50
Z6M2..... 33	ZBU1MFPK..... 65	ZF1V-5..... 13	ZN1PK-10..... 63	ZRU41T..... 29	ZUFLKF..... 76
Z8M1..... 33	ZBU1MPK..... 65	ZF1VISF..... 40	ZN1Q..... 10	ZRU42..... 29	ZUFLPK..... 76
Z8M1PK..... 33	ZBU1PK..... 65	ZF1VISF..... 40	ZN2-10..... 10	ZRU42L..... 29	ZUFR.5..... 52
Z8M2..... 33	ZBU1T..... 26	ZF2-10..... 12	ZN2PK-10..... 63	ZRU42T..... 29	ZUFR.5F..... 51
ZAOR11..... 219	ZBU1TFPK..... 65	ZF2B-10..... 12	ZN4-10..... 10	ZRUF1.5..... 50	ZUFR1..... 52
ZAOR12..... 219	ZBU1TPK..... 65	ZF2FEP-10..... 13	ZNF1FKF-5..... 63	ZRUF2..... 50	ZUFR1C..... 52
ZAOR22..... 219	ZBU1XC..... 26	ZF2GP-10..... 12	ZNF1FPK-5..... 63	ZRUF42..... 50	ZUFR1CF..... 51
ZBAA1..... 36	ZBU2..... 26	ZF2GV-5..... 13	ZNF1FPKG-5..... 63	ZRUF42L..... 52	ZUFR1F..... 51
ZBNV1..... 218	ZBU2L..... 26	ZF2HC..... 12	ZNF1KF-5..... 63	ZRUF42T..... 51	ZUFR2..... 52
ZBNV1-D..... 218	ZBU2LPK..... 65	ZF2KF-10..... 13	ZNF1PK-5..... 63	ZRUF42F..... 51	ZUFR2F..... 51
ZBNV1F..... 218	ZBU2PK..... 65	ZF2NI..... 12	ZNF1PKG-5..... 63	ZRUF42F..... 51	ZVISF-1PE..... 40
ZBNV1F-D..... 218	ZBU2T..... 26	ZF2PFA-10..... 13	ZNFT..... 67	ZRUF41..... 51	ZVISF-1PEH..... 40
ZBNV1F-KZ..... 218	ZBU2TPK..... 65	ZF2PK-10..... 63	ZP.5..... 11	ZRUF41F..... 51	ZVISF-1PFA..... 40
ZBNV1-KZ..... 218	ZBU4..... 26	ZF2S6-10..... 12	ZP.5FPK..... 64	ZRUF42..... 52	ZVISF-1PFAH..... 40
ZBNV1LF..... 218	ZBU4L..... 26	ZF2SI..... 41	ZP.5H..... 11	ZRUF42F..... 51	ZX.5..... 32
ZBNV1LF-D..... 218	ZBU4T..... 26	ZF2TF-10..... 13	ZP1..... 11	ZRUF42F..... 51	ZX.5FPK..... 64
ZBNV1LF-KZ..... 218	ZBUF1..... 50	ZF2TFG-10..... 13	ZP1FPK..... 64,71	ZRUF42F..... 51	ZX.5L..... 32
ZBRU1.5..... 29	ZBUF2..... 50	ZF2TI..... 12	ZP1H..... 11	ZRUF42F..... 51	ZX.5LFPK..... 64
ZBRU1.5FPK..... 65	ZBUF4..... 50	ZF2V1-5..... 13	ZP2..... 11	ZRUF42F..... 51	ZX1..... 32
ZBRU1.5L..... 29	ZBUFLKF..... 76	ZF2V-5..... 13	ZP2H..... 11	ZRUF42F..... 51	ZX1C..... 32
ZBRU1.5LFPK..... 29	ZBUFLPK..... 76	ZF4B-10..... 12	ZP2PK..... 64	ZRUF42F..... 51	ZX1CFPK..... 64
ZBRU1.5T..... 29	ZBUFR.5..... 52	ZF4FEP-10..... 13	ZP4..... 11	ZRUF42F..... 51	ZX1FPK..... 64
ZBRU1.5TFPK..... 65	ZBUFR.5F..... 51	ZF4GP-10..... 12	ZRF1.5KF-5..... 14	ZRUF42F..... 51	ZX1L..... 32
ZBRU2.5..... 29	ZBUFR1..... 52	ZF4GV-5..... 13	ZRF1.5PK-5..... 14	ZRUF42F..... 51	ZX1LFPK..... 64
ZBRU2.5FPK..... 65	ZBUFR1C..... 52	ZF4HC..... 12	ZRF1.5TFG-5..... 14	ZRUF42F..... 51	ZX1M..... 32
ZBRU2.5L..... 29	ZBUFR1CF..... 51	ZF4K-10..... 13	ZRF1.5V1-5..... 14	ZRUF42F..... 51	ZX1MFPK..... 64
ZBRU2.5LFPK..... 65	ZBUFR1F..... 51	ZF4NI..... 12	ZRF1.5V-5..... 14	ZRUF42F..... 51	ZX2..... 32
ZBRU2.5T..... 29	ZBUFR2..... 52	ZF4PFA-10..... 13	ZRF2.5KF-5..... 14	ZRUF42F..... 51	ZX2L..... 32
ZBRU2.5TFPK..... 65	ZBUFR2F..... 51	ZF4PK-10..... 63	ZRF2.5PK-5..... 14	ZRUF42F..... 51	ZX2LPK..... 64
ZBRU21..... 29	ZBUMLKF..... 76	ZF4S6-10..... 12	ZRF2.5TFG-5..... 14	ZRUF42F..... 51	ZX4..... 32
ZBRU21C..... 29	ZBUMLPK..... 76	ZF4TF-10..... 13	ZRF2.5V1-5..... 14	ZRUF42F..... 51	ZXLTA41..... 36
ZBRU21CFPK..... 65	ZC.5FPK..... 64	ZF4TFG-10..... 13	ZRF2.5V-5..... 14	ZRUF42F..... 51	
ZBRU21FPK..... 65	ZC1FPK..... 64	ZF4TI..... 12	ZRF21KF-5..... 14	ZRUF42F..... 51	
ZBRU21LFPK..... 65	ZC1PK..... 64	ZF4V1-5..... 13	ZRF21PK-5..... 14	ZRUF42F..... 51	
ZBRU21T..... 29	ZC2PK..... 64	ZF4V-5..... 13	ZRF21TFG-5..... 14	ZRUF42F..... 51	
ZBRU21TFPK..... 65	ZERU1.5FPK..... 60	ZF6FEP-10..... 13	ZRF21V1-5..... 14	ZRUF42F..... 51	
ZBRU41..... 29	ZF.5-10..... 12	ZF6GV-5..... 13	ZRF21V-5..... 14	ZRUF42F..... 51	
ZBRU41C..... 29	ZF.5B-10..... 12	ZF6KF-10..... 13	ZRF41KF-5..... 14	ZRUF42F..... 51	
ZBRU41T..... 29	ZF.5FEP-10..... 13	ZF6PFA-10..... 13	ZRF41PK-5..... 14	ZRUF42F..... 51	
ZBRU42..... 29	ZF.5GP-10..... 12	ZF6PK-10..... 63	ZRF41TFG-5..... 14	ZRUF42F..... 51	
ZBRU42L..... 29	ZF.5GV-5..... 13	ZF6TF-10..... 13	ZRF41V1-5..... 14	ZRUF42F..... 51	
ZBRU42T..... 29	ZF.5HC..... 13	ZF6TFG-10..... 13	ZRF41V-5..... 14	ZRUF42F..... 51	
ZBRUF1.5..... 50	ZF.5KF-10..... 13	ZF6V1-5..... 13	ZRF42KF-5..... 14	ZRUF42F..... 51	
ZBRUF21..... 50	ZF.5NI..... 12	ZF6V-5..... 13	ZRF42PK-5..... 14	ZRUF42F..... 51	
ZBRUF42..... 50	ZF.5PPA-10..... 13	ZF8FEP-10..... 13	ZRF42TFG-5..... 14	ZRUF42F..... 51	
ZBRUFR1.5..... 52	ZF.5PK-10..... 63	ZF8GV-5..... 13	ZRF42V1-5..... 14	ZRUF42F..... 51	
	ZF.5PK-5..... 16	ZF8KF-10..... 13	ZRF42V-5..... 14	ZRUF42F..... 51	
	ZF.5S6-10..... 12	ZF8PFA-10..... 13	ZRU1.5..... 29	ZRUF42F..... 51	

INDEX BY PRODUCT NUMBER

--	--	--	--	--

- 1/32" external union..... 19
- 3-way solenoid air valves..... 198
- 360 µm fittings **NEW** 57-58
- 4-way solenoid air valve..... 198
- 10,000 psi injectors..... 156, 157, 171
- 15,000 psi injectors..... 152, 153, 156, 157, 170
- 40,000 psi injector system 85

A

- Actuator hardware
 - Closemount..... 208-209
 - Right angle drive..... 204
 - Standoff..... 205-207

ACTUATORS 186-211

- Air 194-195
- Microelectric 188-191
- Standard electric..... 193
- Universal 192

Adapters

- 1/16" internal to
 - 1/32" external 21
- Aerosol to Valco 36
- Cheminert
 - (See Cheminert Fittings)
- External to internal 35
- Fused silica..... 16-17
- Fused silica makeup..... 20
- Injector/detector 20, 35
- Internal reducers 34
- Pipe adapters
 - Cheminert..... 77
 - Female to
 - Valco external..... 39
 - Valco internal..... 38
 - Male to
 - Valco external..... 39
 - Valco internal..... 38
 - Manifold pipe adapters . 37
- Syringe adapters
 - Female luer to Valco..... 40
 - Female luer to 1/4-28 76
 - Fill ports..... 40, 60
 - Tube adapters..... 36, 76

- Aerosol adapter
 - bulkhead union 36
- Air actuators for valves 194-195
- Air actuator repair kits
 - Selector 194
 - Two position 195
- Applications
 - Cheminert..... 168-169
 - Diaphragm..... 143
 - Selector..... 134-139
 - Two position . 117-121, 168-169

B

- Biocompatible filters..... 78-80
- Bulkhead reducing unions
 - Cheminert
 - High pressure PEEK..... 65
 - Low Pressure..... 73
 - Valco
 - External..... 30
 - External/internal 31
 - Internal..... 29
 - Internal/external 31

- Bulkhead unions
 - Aerosol adapter
 - bulkhead union 36
 - Cheminert..... 65, 73
 - External..... 27
 - External/internal..... 27
 - Internal..... 26
 - Luer adapter..... 76

C

- Capillary columns..... 234-244
- Caps
 - Cheminert..... 57, 58, 64, 71
 - Valco 11

CHEMINERT FITTINGS 56-81

- 1/4-28 to ZDV adapter 77
- 360 µm fittings **NEW** 57-58
- Bulkhead unions
 - Cheminert to Cheminert 73
 - Cheminert to Valco..... 73
 - Cheminert to Luer 76
- Caps
 - High pressure 64
 - Low pressure..... 71
- Crosses
 - High pressure 64
 - Low pressure (1/4-28)..... 74
 - Nanovolume 57, 60
- External nuts 69
- Ferrules 63
- Glass connectors..... 75
- High pressure
 - PEEK caps 64
 - PEEK crosses..... 64
 - PEEK ferrules 63
 - PEEK internal nuts..... 63
 - PEEK internal unions 65
 - PEEK internal reducing unions 65
 - PEEK plugs..... 64
 - PEEK tees..... 64
- Luer adapters
 - Cheminert (1/4-28)..... 76
 - Luer adapter
 - bulkhead union 76
- Manifolds 74
- Mixing tees 75
- Nanovolume fittings 57-62
- Nuts, PEEK high pressure 63
(Also see *Tube end fittings*)
- Pipe adapters
 - Female 1/4-28 to:
 - female NPT 77
 - male NPT 77
 - Male 1/4-28 to male NPT..... 77
- Plugs
 - High pressure 64
 - Low pressure 71
- Reducing unions..... 65
- Tees
 - High pressure 64
 - Low pressure (1/4-28)..... 74, 75
- Tube adapters
 - Male 1/4-28 to tube..... 76
- Tube end fittings
 - External nuts for
 - flanged tubing 69
 - Flanged 69
 - Flangeless 1/4-28 68

CHEMINERT FITTINGS, cont'd

- Unions
 - High pressure 65
 - Low pressure
 - Cheminert to:
 - 1/4" tubing 72
 - Cheminert 72
 - Valco 72
 - Nanovolume 57, 58, 60, 61

CHEMINERT INJECTORS/SELECTORS 144-185

- HPLC..... 156-163
- Low pressure..... 164-167
- Nanovolume..... 152-155, 170-171
- OEM 149, 151, 178-185
- Selectors 170-177

- Clean Cut tubing cutter..... 90
- Closemount hardware..... 208-209
- Color-It fingertight adapters 66
- Column coupler 77
- Column end fittings
 - Analytical..... 44
 - Microbore 43
 - Nanovolume 62
 - Post-column reaction 46
 - Semi-preparative 45
 - Preparative 45

Columns

- HPLC columns 47
- ValcoBond columns..... 234-244
- Combo valves 214-215
- Combo pressure regulators..... 219
- Crosses
 - Cheminert..... 64, 74
 - Microvolume..... 22-23
 - Nanovolume 57, 60
 - Valco 32

D

- DVI (Digital valve interface) 199
- DVSP (Digital valve sequence programmer 196
- Detectors
 - Pulsed discharge (PDD)..... 220-225
 - Thermal conductivity (TCD)..... 227

DIAPHRAGM VALVES 140-143

- Digital valve interface (DVI) 199
- Digital valve sequence programmer (DVSP) 196
- Diluter/dispenser 82-83
- Drill index 55

E

- Easy-Flange kit..... 71
- Electric valve actuators
 - Microelectric
 - Selector..... 188, 190-191
 - Two position 188-189
 - Standard electric
 - Selector..... 193
 - Two position 193
 - Universal..... 192
- Electroformed nickel tubing 87

F

- Ferrules
 - For fused silica..... 16
 - For fused silica unions 18
 - Grooved PEEK..... 63
 - High pressure PEEK 63
 - Nanovolume 57, 58, 59
 - Reducing 14-15
 - Standard
 - Metal..... 12
 - Polymeric 13
- Ferrule removal kit 54

FIA PRODUCTS

- Cheminert fittings..... 68-81
- Cheminert valves..... 164-167, 174-177
- M series pump 84
- Mobile phase/ solvent reservoirs..... 81
- Mobile phase filters 78-80
- Perifit fittings..... 78

- VICI-cap 81
- Fill ports 40, 60
- Fill port, zero dead volume **NEW**..... 40
- Fill port assembly for Cheminert C2 and C4 valves..... 41

Filters

- Biocompatible 78-80
- In-line 78
- Mobile phase 78-80
- Valco 48-53
 - Pressed frit..... 50
 - Removable frit..... 51
 - Removable screen 52
- Fingertight fittings
 - High pressure PEEK 63-65
 - Nanovolume 59-62
 - No twist..... 63
 - One-piece
 - color-coded PEEK..... 66
 - One-piece column coupler..... 77

FITTINGS

- Cheminert 57-81
- HPLC column end..... 42-45
- Nanovolume..... 57-62
- Valco..... 6-53
- Flanged tube end fittings..... 69
- Flangeless tube end fittings 68
- Flanging tools
 - and starter kits 70, 71

FLOW, PRESSURE, AND ON/OFF CONTROL DEVICES 212-219

- Combo valves 214, 215
- Combo pressure regulators..... 219
- Flow controllers..... 216-217
- Micrometering valves 218
- Needle valves..... 218
- On/off valves 212-213
- Prime/purge valves..... 212-213
- Flow controllers..... 216-217

Frits
 for HPLC column
 end fittings 45
 for Valco filters 53
 Nanovolume 60
 Fused silica adapters
 One-piece 16
 Removable 17
 Fused silica fittings 16-21
 1/32" external union 19
 1/16" internal to
 1/32" external 21
 Injector nut for HP 6890
 and 5890 19
 Injector/detector adapter 20
 Make-up adapter 20
 Unions 18-19, 58, 61

G
 GC columns 234-244
 GC valves 102-111
 Gas flow controllers 216-217
 Gas purifiers 226-227, 246-247
 Glass connectors 75
 Glossary 258

H
 HPLC column end fittings
 Analytical 44
 Microbore 43
 Nanovolume 62
 Post-column reaction 46
 Semi-preparative 45
 Preparative 45
 HPLC injectors
 Analytical 161-163
 Integrated **NEW** 178, 180
 Microbore 156-160
 Nanobore 152-155
 Valco 112-116
 HPLC precolumns
 (guard columns) 47
 HPLC integrated selectors 184
 HSSA (High speed switching
 accessory) 198
 Heated column enclosures 203
 Heated valve enclosures 201
 Heater cartridges 202
 Helium photoionization
 detector 221-223
 Helium purifier 226-227, 247
 Hex key set 54
 High speed switching accessory
 (HSSA) 198
 High temperature air actuators
 Selector 194
 Two position 195

I
 IZR (Internal reducer) 34
 Injection port liner 245
 Injector nut for HP-6890
 and HP-5890 19
 Injectors (See: *Cheminert valves*
 Diaphragm valves
 Valco valves)

INSTRUMENTATION 220-227
 Helium purifiers 226-227, 247
 Nitrogen purifiers 226-227, 247
 Pulsed discharge detectors
 (PDD) 220-225
 Thermal conductivity detectors
 (TCD) 227

Instrumentation temperature
 controller (ITC) 203
 Integrated motor/valves
 for LC **NEW** 182-183
 Internal reducers (IZR) 34
 Internal reducers
 for 360 µm tubing **NEW** 34

L
 Length conversions 262
 Liquid handling pump 84
 Loop fill port assembly for
 Cheminert C2, C4 valves 41
 Loop installation wrench
 (custom socket wrench) 210
 Loops for each valve type are
 found on the price list page
 with their corresponding valves
 Luer adapters
 Cheminert 76
 Luer adapter bulkhead
 union 76
 Valco 41

M
 M Series
 Pump 84
 Diluter/dispenser 82-83
 MSVA (Manifold 3-way solenoid
 valve assembly) 198
 Manifold pipe adapters 37
 Manifolds
 Cheminert 74
 Valco 33
 Manual valve hardware
 Closemount 208
 Knobs and handles 204
 Standoff 205
 Materials discussions
 Metals 254-255
 Polymers 256
 Valve rotors 257
 Metronics 1
 Microelectric actuator
 Selector 190-191
 Two position 188-189
 Micrometering valves 218
 Microvolume connectors 22-23
 Mininert valves for vials 81
 Mobile phase filters 78-80

N
 Nanovolume
 360 µm fittings **NEW** .. 57-58
 Caps 57, 58
 Column end fittings 62
 Cross 57, 60
 Ferrules 57, 58, 59
 Frits 60
 Injectors 152-155
 Nuts 57, 58, 59

Nanovolume fittings, cont'd
 Plugs 57, 58, 59
 Reducing unions 57, 58, 60
 Selectors 170
 Tees 57, 60
 Unions 57, 58, 60, 61
 Needle valves 218
 Nitrogen purifiers 226-227, 247
 No twist one-piece fittings 63
 Non-radioactive pulsed
 discharge detectors 220-225
 Nuts
 Cheminert high pressure 63
 Cheminert low pressure 68-69
 Nanovolume 57, 58, 59
 Valco
 external 11
 internal 10
 Septum injector nuts 41
 Specialty **NEW** 10

O
 OEM
 Injectors 149, 178-183
 Selectors 151, 184-185
 Universal actuator 192
 O-ring kits for air actuators
 Selector 194
 Two position 195
 On/off valves 212-213
 On/off valve, 40K psi **NEW** 85
 Open end wrenches 210
 One-piece fingertight
 fittings 63, 66, 77

P
 PDD (Pulsed discharge
 detector) 220-225
 PEEK fittings, high pressure .. 63-67
 PEEK tubing 88-89
 Dual layer **NEW** 89
 Pencil magnet 210
 Perfit fittings 78
 Pin vise 55
 Pipe adapters
 Cheminert 77
 Female 1/4-28 to
 female NPT 77
 male NPT 77
 Female NPT to
 Valco external 39
 Valco internal 38
 Male 1/4-28 to male NPT 77
 Male NPT to
 Valco external 39
 Valco internal 38
 Manifold pipe adapters 37

Plugs
 Cheminert
 High pressure 64
 Low pressure 71
 Valco 11
 Polymeric ferrules 13-15, 63
 Position feedback for
 Manual valves 199
 Air actuated valves 199
 Post-column reaction fittings 46
 Precision Sampling 1
 Precolumns (guard columns) 47

Pressure conversions 262
 Pressure regulators 219
 Prime/purge valves 212-213
 Pulsed discharge detectors
 (PDD) 220-225
 Pump (M Series) 84
 Purge housings for valves 200
 Purifiers, gas 226-227, 246-247

R
 RAD (Right angle drive) 204
 Reduced breakdown
 injection liner 245
 Reducing ferrules
 External 15
 Internal 14
 Standard 15
 Reducing unions
 Bulkhead
 (See *Bulkhead
 reducing unions*)
 Cheminert
 High pressure 65
 Nanovolume 57, 58, 60
 Valco
 External 30
 External/internal 31
 Internal 29
 Internal/external 31
 Regulators, flow 216-217
 Regulators, pressure 219
 Right angle drive (RAD) 204
 Rotor materials 257

S
 SVI (Serial valve interface) 197
 Safety issues 252
 Sample loops
 for each valve type are found
 on the price list page with
 their corresponding valves
 Screens 53
 Selectors
 Cheminert 170-177, 184-185
 Nanovolume 170-171
 OEM 184-185
 Valco 122-139
 Septum injector nut 41
 Serial valve interface (SVI) 197
 Solenoid air valves
 4-way 198
 Manifold 3-way (MSVA) 198
 Solvent reservoirs 81
 Standoff assemblies 205-207
 Syringe adapters
 Loop fill port assembly
 for C2 and C4 valves 41
 Luer adapters
 Cheminert 76
 Luer adapter bulkhead
 union 76
 Valco 41
 Fill ports
 for metal valves 40
 for polymeric valves 40
 zero dead volume **NEW** 40
 Septum injector nuts 41
 Zero dead volume
 fill ports **NEW** 40

T

TCD (Thermal conductivity detector).....	227
Tees	
Cheminert high pressure	64
Cheminert low pressure	74
Mixing	75
Microvolume.....	23
Nanovolume	57,60
Valco	32
Temperature controllers	
ITC (Instrumentation temperature controller)	203
Temperature conversions.....	262
Template for valve schematics.....	55
Thermal conductivity detector (TCD).....	227

TOOLS

Drill index.....	211
Ferrule removal kit.....	54
Hex key set.....	210
Loop installation wrench (custom socket wrench)	210
Open end wrenches.....	210
Pencil magnet.....	210
Pin vise	211
Template.....	211
Tightening tools for PEEK fittings	67
Valve spanner handle.....	211
Trademarks	263
Tube adapters.....	36,76
Tube end fittings (Cheminert)	
External.....	69
Flanged.....	69
Flangeless	68

TUBING 86-93

Color coded PEEK	
Dual-layer PEEK NEW	89
Striped PEEK.....	89
Custom lengths	
Metal.....	91
PEEK	89
Pre-cut lengths	
Stainless.....	92-93
Polymeric	88-90
316 Stainless.....	91-93
Electroformed nickel.....	87
ETFE	90
FEP	90
Hastelloy C	91
Inconel 600	91
Nickel 200.....	91
PEEK.....	88-89
PTFE.....	90
Tubing clip	90
Tubing cutter	90

U

UHPLC injectors and selectors	
Nanovolume NEW	152-153
Microbore NEW	156-157
On/off NEW	85
Prime/purge NEW	85
Selectors NEW	170-171

Unions

Bulkhead (See Bulkhead unions)	
Cheminert	
High pressure	65
Low pressure	72
Nanovolume	57-61
Reducing (See Reducing unions)	
Valco	
1/32" external.....	27
External.....	27
Fused silica	18-19
Internal.....	26
Microvolume.....	22-23
Reducing	29-31
Universal actuator NEW	192

V

Valco Canada.....	1
Valco Instruments.....	1

VALCO FITTINGS 6-55

1/32" external union.....	19
Adapters	
1/16" internal to 1/32" external reducer	21
Aerosol to Valco	36
External to internal	35
Fused silica.....	16-17
Fused silica makeup	20
Injector/detector	20,35
Internal reducers	34
Manifold pipe adapters.....	37
Pipe adapters.....	38-39
Syringe adapters	
Female luer to Valco.....	40
Fill ports.....	40
Tube adapters.....	36
Bulkhead reducing unions	
External.....	30
External/internal.....	31
Internal.....	29
Internal/external.....	31
Bulkhead unions	
Aerosol adapter bulkhead union	36
External.....	27
External/internal.....	27
Internal.....	26
Caps.....	11
Column end fittings	
Analytical.....	44
Microbore	43
Post-column reaction	46
Semi-preparative and preparative	45
Crosses	32
Microvolume.....	22-23
Ferrules	
For fused silica.....	16
For fused silica unions	18
Reducing	14-15
Standard	
Metal.....	12
Polymeric	13
Ferrule removal kit.....	54
Fill ports	40

VALCO FITTINGS, CONT'D

Filters.....	48-53
Pressed frit	50
Removable frit.....	51
Removable screen.....	52
Frits	
For HPLC column end fittings.....	45
For filters.....	53
Nanovolume	60
Fused silica adapters	
One-piece.....	16
Removable.....	17
Fused silica fittings	
1/32" external union.....	19
1/16" internal to 1/32" external.....	21
Injector nut for HP-6890 and HP-5890	19
Inj/detector adapter.....	20,35
Make-up adapter.....	20
Microvolume unions.....	22-23
HPLC precolumns (guard columns)	47
Injector nut for HP-6890 and HP-5890	19
Internal reducers.....	34
Loop fill port assembly for C2 and C4 valves	41
Luer adapters.....	40
Manifold pipe adapters.....	37
Manifolds.....	33
Microvolume connectors	22-23
Nuts	
External.....	11
Internal.....	10
Nanovolume	57-59
Septum injector nuts	41
Specialty NEW	10
Pipe adapters	
Female NPT to	
Valco external.....	39
Valco internal.....	38
Male NPT to	
Valco external.....	39
Valco internal.....	38
Manifold pipe adapters.....	37
Plugs.....	11
Polymeric ferrules.....	13
Post-column reaction fittings	46
Precolumns (guard columns)	47
Reducing ferrules	14-15
Reducing unions.....	29-31
Screens.....	53
Septum injector nut	41
Syringe adapters	
Loop fill port assembly for C2, C4 valves	41
Luer adapters.....	41
Fill ports	
for metal valves.....	40
for polymeric valves.....	40
zero dead volume NEW	40
Septum injector nuts	41
Tees.....	32
Microvolume.....	22-23
Tube adapters.....	36

VALCO FITTINGS, CONT'D

Unions	
1/32" external.....	27
Bulkhead	26-27
External.....	27
External/internal reducing... ..	31
Fused silica	18-19
Internal.....	26
Internal/external reducing.. ..	31
Microvolume.....	22-23
Reducing	29-31

VALCO INJECTORS/VALVES

GC	102-111
HPLC.....	112-116
Selectors	100-101, 122-139
Low pressure	122-131
High pressure	132-133
ValcoBond columns.....	234-239
ValcoPLOT columns	234, 240-244
Valve actuators	
Air.....	194-195
Microelectric	188-191
Standard electric	193
Universal (OEM)	192
Valve sequence controllers	
DVSP (Digital valve sequence programmer)	196
SVI (Serial valve interface) ..	197
Valve spanner handle.....	211
Valves	
Cheminert.....	144-185
Combo valves.....	214-215
Diaphragm valves	140-143
Nanovolume 152-155, 170-171	
Needle	218
On-off	85, 212-213
Prime/purge.....	85, 212-213
Valco.....	96-139
UHPLC on/off NEW	85
UHPLC prime/purge NEW	85
VICI-cap.....	81
VICI AG.....	1
VICI AG International.....	1
VICI Metronics.....	1
VICI Precision Sampling	1
VICI Valco Canada.....	1
VICI Valco Instruments.....	1

W

Warranty	253
Wrenches	54-55

Specialized Tubing

READ ABOUT MORE
NEW PRODUCTS

Find many more new products from VICI on pages 2 - 5.

Nickel-clad fused silica

- Inert, flexible transfer lines
- Improved heat transfer

We take polyimide-coated fused silica (FS) and remove the polyimide layer. Then we electrochemically plate the FS with pure nickel. The resulting nickel-plated FS tube provides superior heat transfer to the FS lining, permitting use as a flexible transfer line with the best qualities of silica-lined stainless but with improved heat transfer and a shorter bend radius. The 1/32" OD tubing is available in IDs from .002" to .010". For high pressure applications, we recommend using our 1/32" 316SS ferrules.

Nickel-clad polyimide-coated fused silica

- Improved heat transfer for FS columns
- Permits resistive heating of columns and transfer lines
- Allows direct connection using metal ferrules
- Rated up to 20,000 psi (dependent on size and plating thickness)

Any polyimide-coated FS can be electroplated with pure nickel, resulting in a ruggedized traditional FS column (or transfer line with deactivated FS), which can be resistively heated, if desired. Best of all, it permits use of metal ferrules for improved leak-tight connections—perfect for temperature program applications.

1/32" OD tubing is available in IDs from .002" to .010". A thin-wall, low mass version optimized for resistive heat applications is available with OD of .017" (48 VDC) or .019" (24 VDC). We offer several options for tubing connections. Contact our tech support to discuss your application.

Nickel-clad PEEK

- Permits use of PEEK tubing at 40,000 psi
- Direct connection with metal ferrules

Since we can manufacture virtually any size PEEK tubing from 360 micron OD/.002" ID on up, the possibilities are endless.


In any size, the mechanical properties of nickel combined with the chemical properties of PEEK produce enhanced performance with robust metal ferrule connections. We currently offer 1/32" OD tubing with ID from .002" to .010", and 1/16" OD tubing from .0025" to .030".




Nickel-clad fused silica
.017" OD x .007" ID
(TEFNIS.207)



Nickel-clad polyimide-coated fused silica
.017" OD x .007" ID
(TEFNIFS.207)



Nickel-clad polyimide-coated fused silica
1/32" OD x .007" ID
(TEFNIFS.507)



Nickel-clad PEEK
1/32" OD x .004" ID
(TEFNIPK.504)

TO ORDER

NORTH, SOUTH, AND CENTRAL AMERICA (except Canada); AUSTRALIA AND NEW ZEALAND

VICI Valco Instruments Co. Inc.

SALES

- Phone: 800-367-8424*
* USA and Canada only
- Fax: 713-688-8106
- Email: sales_usa@vici.com

TECHNICAL

- Phone: 713-688-9345
- Fax: 713-956-1649
- Email: tech_usa@vici.com

SERVICE


- Phone: 713-688-9345
- Fax: 713-688-7618

P.O. Box 55603
Houston, TX 77255
USA

valco@vici.com

F.O.B. shipping point, our factory,
Houston, Texas.

We accept:



TO ORDER

EUROPE, MIDDLE EAST, ASIA, AND AFRICA

VICI AG International

SALES

- Phone: Int + 41-41-925-6200
- Fax: Int + 41-41-925-6201
- Email: order@vici.ch

TECHNICAL

- Phone: Int + 41-41-925-6200
- Fax: Int + 41-41-925-6201
- Email: support@vici.ch

SERVICE

- Phone: Int + 41-41-925-6200
- Fax: Int + 41-41-925-6201

Parkstrasse 2
CH-6214 Schenkon
Switzerland

info@vici.ch

Ex works, Schenkon, Switzerland.

We accept:



TO ORDER

CANADA

VICI Valco Instruments Canada Corporation

- Toll-free: 866-297-2626
- Phone: 613-342-2600
- Fax: 613-342-0111
- Email: canada@vici.com

26 Water Street East
Brockville, Ontario
Canada K6V 1A1

canada@vici.com

F.O.B. shipping point, our factory,
Brockville, Canada.

We accept:



Conditions of Sale

There is no minimum order.
Terms are net 30 days.
Prices subject to change without
notice. All prices are in U.S. dollars.

Returns

No returns will be accepted more than 90 days after shipment for any reason. Before 90 days, no returns will be accepted without prior authorization. If it is necessary to return material to us, please contact our Sales Department for a return authorization number and forwarding instructions. Inspect shipments upon receipt and report shortages and incorrect or damaged material to us immediately. *Important!* Damaged shipments must remain with the original packaging for freight company inspection.

Returned material will be subject to a restocking charge of 20% for catalog items. Special orders cannot be returned unless defective.

Repairs

For repair return authorization or information about factory refurbishments, contact our Service Department.

Technical Service

Our capable staff is waiting to assist you with your technical questions and application needs.

Notice

VICI reserves the right to correct errors and change prices, designs, or specifications without notice or liability. The information in this catalog is correct to the best of our knowledge but is not guaranteed to be so. VICI assumes no responsibility with respect thereto.